
Highland DB-PGI Passive Grease Interceptors



Highland Tank
Waste Water Division



DB-PGI Double Basin Passive Grease Interceptors

Highland Double Basin Passive Grease Interceptors are designed to intercept and remove large quantities of fats, oils, and grease (FOG), discharged from food service facilities and large commercial/institutional kitchens, which might interfere with the proper drainage and treatment of municipal wastewater.

Highland Passive Grease Interceptors are highly efficient. Designed to accept gravity flow, Highland Passive Grease Interceptor Tanks, with their advanced "Switchback Baffling System™", retain wastewater long enough to allow liquefied FOG to cool down, separate,

and congeal. Highland Passive Grease Interceptors keep large amounts of pipe-clogging grease from entering the sanitary sewer system.


All Highland Passive Grease Interceptors are of the highest quality and are designed for the rigors of a below ground environment. They are constructed of protected steel to Underwriter's Laboratories UL and Steel Tank Institute STI-P3® or ACT-100-U® specifications, with a 30 year limited warranty against corrosion and structural failure. Additionally, a rugged acid resistant internal polyurethane lining provides for years of continuous service.

Options

- Stainless Steel Construction
- Double-wall Secondary Containment
- Manway Extensions
- EZ- Access™ Manways
- Traffic Duty Covers
- Steam or Electric Heating Systems
- Aboveground Rectangular Designs

Please contact Highland Tank for more details.

General Arrangement

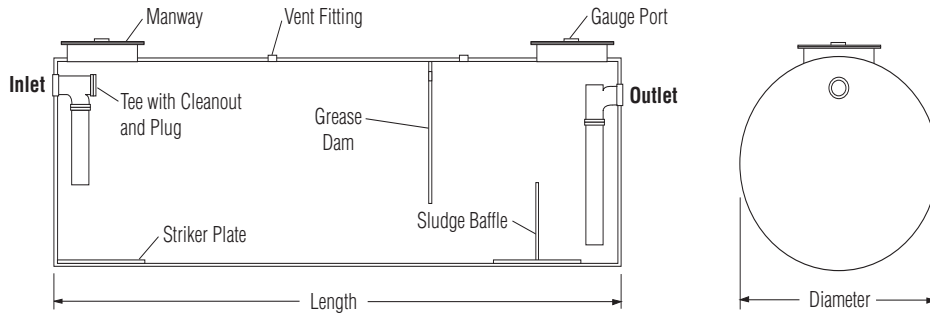

Single and Triple basin interceptors are available. Manhole extensions are available as an option.

DB-PGI Double Basin Passive Grease Interceptors

Highland Passive Grease interceptors help facilities comply with the EPA Fats, Oils, and Grease Pretreatment Program!

Highland Passive Grease Interceptors are designed to intercept the liquid greasy waste and/or garbage from the discharge piping from a food preparation facility or kitchen and retain it for a sufficient amount of time. Grease, especially when hot or warm, is lighter than water and will not mix well with water.

With their advanced "Switchback Baffling System™", Highland Passive Grease Interceptors retain wastewater long enough to allow for cool-down of the greasy liquid, thus promoting coagulation and separation of the grease from the water. This proprietary baffling and detention time also allows for separation of the garbage from the wastewater. The grease cools down and floats on the top of the Interceptor until the service contractor removes it. The wastewater is allowed to discharge from the bottom of the Interceptor into the main sewer system.

Highland Tank's Model HT-DB-PGI Interceptors conform to Uniform Plumbing Code. Interceptors are constructed of all-welded mild carbon steel. STI-P3® or ACT-100-U® Interceptors with interior acid-resistant lining, inlet, outlet, vent, and gauge threaded fittings, internal baffles, and 18" or 24" manway(s). Options include hold down straps, manway extensions, and traffic duty covers.

Nominal Capacity (gal.)	Operating Grease Volume (lbs.)	Dimensions		Inlet / Outlet Diameter	Thickness	Approximate Wt. (lbs.)
		Diameter	Length			
†240	120	3' 2"	4' 0"	4"	7 ga.	830
†300	150	3' 2"	5' 0"	4"	7 ga.	930
550	250	3' 6"	7' 9"	4"	7 ga.	1,350
750	370	3' 6"	10' 9"	4"	7 ga.	1,650
1,000	500	4' 0"	10' 9"	6"	7 ga.	1,950
1,500	750	5' 4"	9' 0"	6"	7 ga.	2,450
2,000	1000	5' 4"	12' 0"	8"	7 ga.	2,925
2,500	1250	5' 4"	15' 0"	8"	7 ga.	3,400
3,000	1500	5' 4"	18' 0"	8"	7 ga.	3,900
4,000	2000	5' 4"	24' 0"	8"	7 ga.	4,850
5,000	2500	6' 0"	23' 10"	10"	1/4"	7,225
6,000	3000	6' 0"	28' 8"	10"	1/4"	8,375
7,000	3500	7' 0"	24' 4"	10"	1/4"	8,800
8,000	4000	7' 0"	28' 0"	10"	1/4"	9,850
9,000	4500	8' 0"	24' 0"	12"	1/4"	10,300
10,000	3000	8' 0"	26' 8"	12"	1/4"	11,500
12,000	6000	8' 0"	32' 0"	12"	1/4"	13,500
15,000	7500	10' 0"	25' 6"	14"	5/16"	17,500
20,000	10000	10' 6"	31' 0"	16"	5/16"	21,500
25,000	12500	10' 6"	38' 9"	18"	3/8"	30,000
30,000	15000	10' 6"	46' 6"	20"	3/8"	34,800
40,000	20000	12' 0"	47' 6"	24"	3/8"	42,000
50,000	25000	12' 0"	59' 6"	24"	3/8"	50,000

† - One Manway, * Intermittent Flow ** Grease Interceptor sizing is based on the Simplified Municipal Sewer Authority Sizing Method for Restaurants.

Consult Highland Tank Engineering Department for alternate sizing methods. Weights shown are for Single-wall Passive Grease Interceptors. Contact Highland for all other weights.

Please visit us at www.highlandtank.com.



One Highland Road
Stoystown, PA 15563
814-893-5701
FAX 893-6126

99 West Elizabethtown Road
Manheim, PA 17545
717-664-0600
FAX 664-0617

958 19th Street
Watervliet, NY 12189
518-273-0801
FAX 273-1365

2700 Patterson Street
Greensboro, NC 27407
336-218-0801
FAX 218-1292

2225 Chestnut Street
Lebanon, PA 17042
717-664-0602
FAX 664-0631

1510 Stoystown Road
Friedens, PA 15541
814-443-6800
FAX 444-8662