

NOTE:
STANDARD TANK HEIGHT SHOWN
CUSTOMER TO VERIFY ACTUAL
HEIGHT REQUIRED

NOTE :
ALL RIGHTS RESERVED. THIS DRAWING OR ANY PART THEREOF MUST NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF THE COMPANY.
HIGHLAND TANK SHALL BE RESPONSIBLE ONLY FOR ITEMS INDICATED ON THIS FABRICATION DRAWING UNLESS OTHERWISE NOTED. CUSTOMER IS RESPONSIBLE FOR VERIFYING CORRECTNESS OF SIZE / LOCATION OF FITTINGS , ACCESSORIES & COATINGS SHOWN ON THIS DRAWING



NOTE: ALL DIMENSIONS IN INCHES UNLESS NOTED OTHERWISE

GENERAL SPECIFICATIONS

NO. REQ'D:
MODEL: MGI-50 CS
MAXIMUM FLOW RATE: 50 GPM
MATERIAL: 12 GA CARBON STEEL
SURFACE PREP:
SSPC-SP 10 BLAST ALL SURFACES
INT. & EXT. COATING: POLYURETHANE
STATIC WATER CAPACITY: 47 GAL
GREASE HOLDING CAPACITY: 100 LBS
APPROX. DRY WEIGHT: 250 LBS

GENERAL NOTES

- ALL PLUMBING CONNECTIONS ARE SUBJECT TO LOCAL CODES

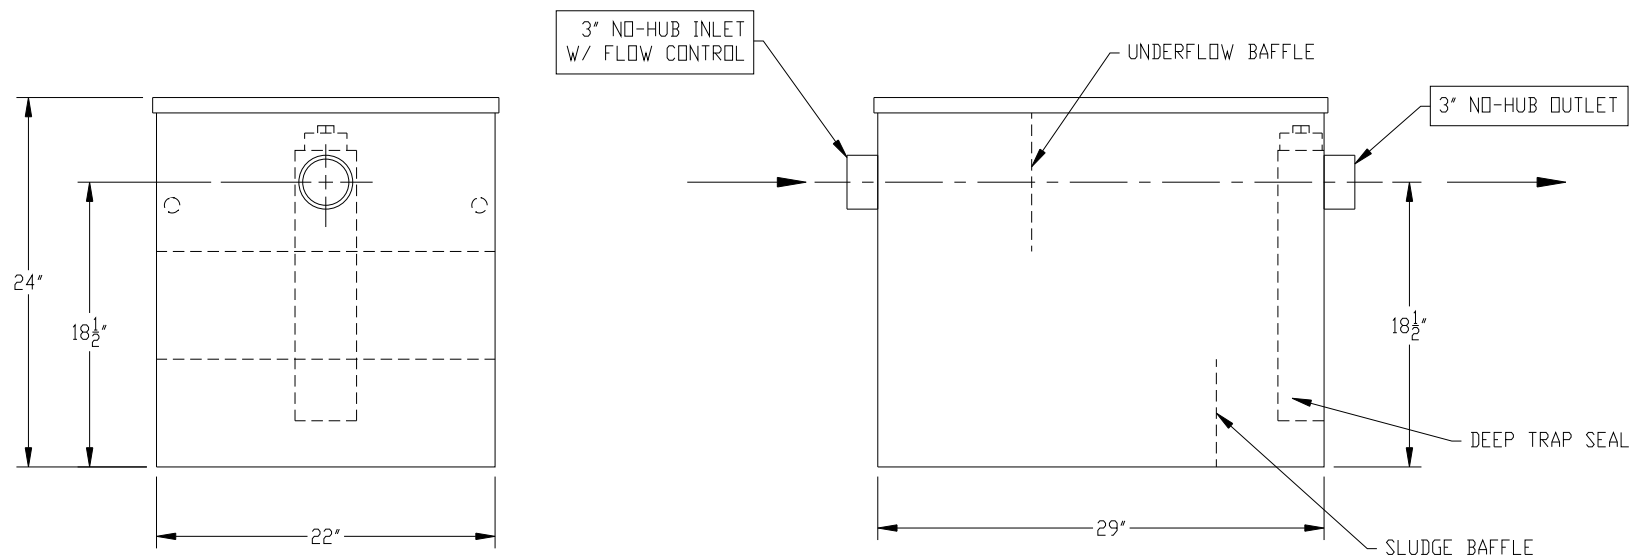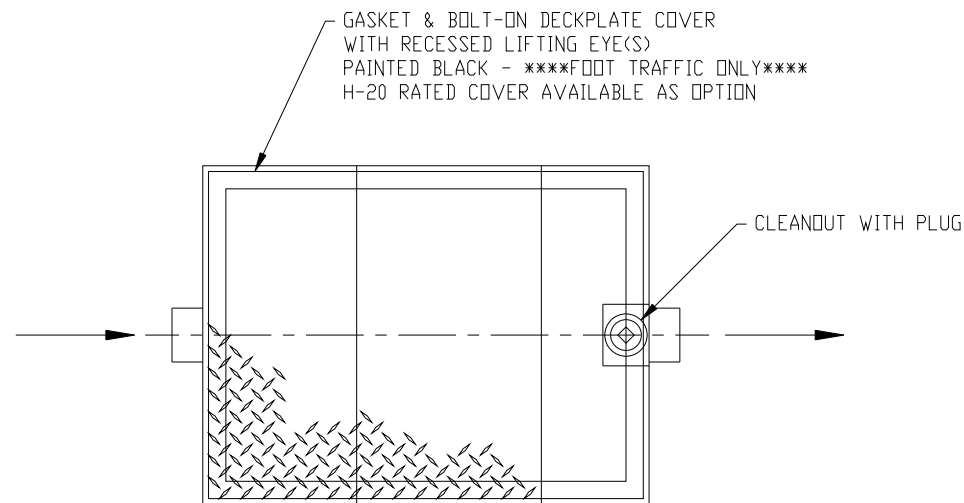

REVISIONS



Highland Tank®

MANUAL GREASE INTERCEPTOR
MGI-50 CS

CUSTOMER:

PROJECT:

QUOTE NO:

DATE: 12/20/10

DWG. BY	
MGS	

DWG. NO.:
MGT-50 CS

CHK'D BY:

[illegible]

DIMENSION TOLERANCE: $\pm 1"$

DWG. BY	
MGS	

DWG. NO.:
MGT-50 CS