



highDRO water tanks



decontamination wastewater storage tanks

HT-1154

PRODUCT DETAILS

HighDRO[®] Decontamination Wastewater Storage Tanks are required at medical facilities to hold or store wastewater generated as a result of decontamination activities performed to remove chemical, biological, radiological, and nuclear (CBRN) residue or hazardous materials (HazMat) from equipment or personnel.

These “tight” tanks are available for either underground or aboveground installations and are designed to store a wide range of contaminated wastewater.


HighDRO[®] Decontamination tanks are available in a variety of sizes, capacities, and arrangements. We offer impervious carbon steel construction with the convenient choices of tough, chemical resistant epoxy or high-solids polyurethane internal linings, depending on the project and liquids stored.

Tanks made of resilient stainless steel construction are also available to withstand the wider range of temperature, CBRN agents, and neutralizing chemicals encountered in decontamination applications.

HighDRO[®] Decontamination tanks are watertight and made of double-wall construction to allow for periodic testing to ensure maintenance of tank integrity. An inspection manhole, vent, gauge, pumpout, level and leak detection sensors with alarm/control panel are standard features.

A variety of options and accessories are available including compartments, inlet or outlet valves, and discharge sump pump with level controls.

HighDRO[®]

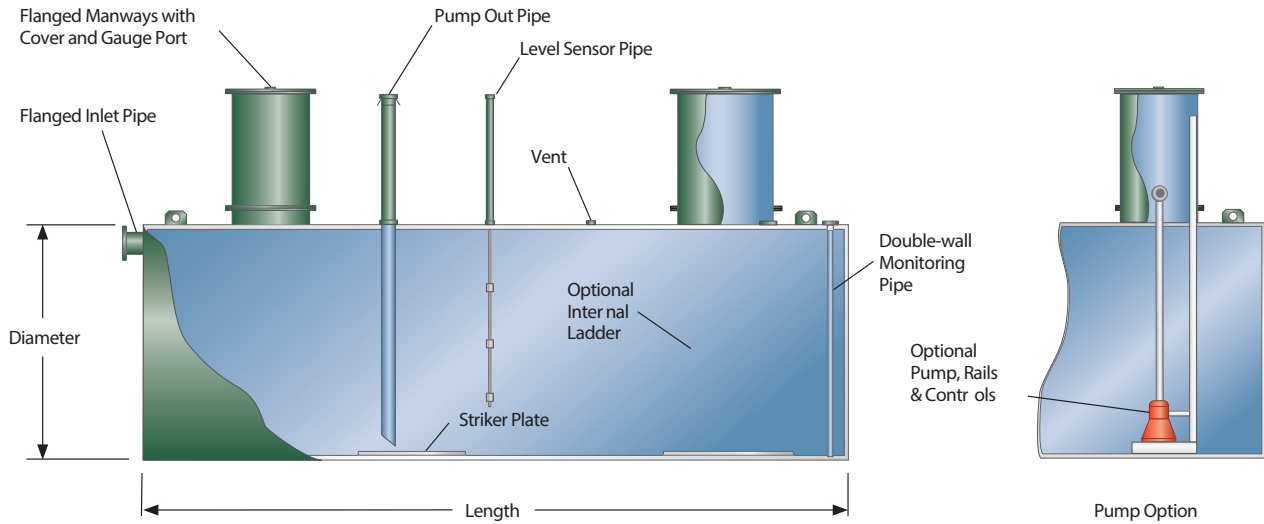

Applications:

- » Hospitals
- » Military Bases
- » Nuclear Energy Centers
- » Industrial & Petrochemical Plants
- » First Responder Facilities
- » Research & Educational Institutions
- » Transportation Hubs

Volume Gallons	Dimensions	
	Diameter	Length
185	3'-2"	3'-4"
240	3'-2"	4'-0"
300	3'-2"	5'-0"
500	4'-0"	5'-5"
1,000	4'-0"	10'-9"
1,000	5'-4"	6'-0"
1,500	5'-4"	9'-0"
2,000	5'-4"	12'-0"
2,500	5'-4"	15'-0"
3,000	5'-4"	18'-0"
4,000	5'-4"	24'-0"
4,000	6'-0"	19'-0"
4,000	8'-0"	10'-8"
5,000	6'-0"	23'-10"
5,000	8'-0"	13'-4"
6,000	6'-0"	28'-8"
6,000	8'-0"	16'-0"
8,000	10'-0"	14'-0"
8,000	8'-0"	21'-4"

Volume Gallons	Dimensions	
	Diameter	Length
10,000	10'-0"	17'-0"
10,000	8'-0"	26'-8"
12,000	10'-0"	20'-6"
12,000	8'-0"	32'-0"
15,000	10'-0"	25'-6"
15,000	8'-0"	40'-0"
20,000	10'-0"	34'-0"
20,000	10'-6"	31'-0"
25,000	10'-0"	42'-6"
25,000	10'-6"	38'-9"
30,000	10'-0"	51'-2"
30,000	10'-6"	46'-6"
40,000	12'-0"	47'-6"
50,000	12'-0"	59'-6"
50,000	12'-6"	54'-6"
60,000	12'-0"	71'-0"
60,000	12'-6"	65'-5"
60,000	13'-0"	60'-6"
70,000	13'-0"	72'-0"



Stoystown, PA
 One Highland Road
 Stoystown, PA 15563-0338
814.893.5701

Manheim, PA
 4535 Elizabethtown Road
 Manheim, PA 17545-9410
717.664.0600

Watervliet, NY
 958 19th Street
 Watervliet, NY 12189-1752
518.273.0801

Greensboro, NC
 2700 Patterson Street
 Greensboro, NC 27407-2317
336.218.0801

Lebanon, PA
 2225 Chestnut Street
 Lebanon, PA 17042-2504
717.664.0602

Friedens, PA
 1510 Stoystown Road
 Friedens, PA 15541-7402
814.443.6800



PROUDLY MADE IN AMERICA