



## highDRO water tanks

### decontamination wastewater storage tanks

**HT-1154**

#### PRODUCT DETAILS

HighDRO<sup>®</sup> Decontamination Wastewater Storage Tanks are required at medical facilities to hold or store wastewater generated as a result of decontamination activities performed to remove chemical, biological, radiological, and nuclear (CBRN) residue or hazardous materials (HazMat) from equipment or personnel.

These “tight” tanks are available for either underground or aboveground installations and are designed to store a wide range of contaminated wastewater.

HighDRO<sup>®</sup> Decontamination tanks are available in a variety of sizes, capacities, and arrangements. We offer impervious carbon steel construction with the convenient choices of tough, chemical resistant epoxy or high-solids polyurethane internal linings, depending on the project and liquids stored.

Tanks made of resilient stainless steel construction are also available to withstand the wider range of temperature, CBRN agents, and neutralizing chemicals encountered in decontamination applications.

HighDRO<sup>®</sup> Decontamination tanks are watertight and made of double-wall construction to allow for periodic testing to ensure maintenance of tank integrity. An inspection manhole, vent, gauge, pump-out, level and leak detection sensors with alarm/control panel are standard features.


A variety of options and accessories are available including compartments, inlet or outlet valves, and discharge sump pump with level controls.

**HighDRO<sup>®</sup>**

### Applications:


- » Hospitals
- » Military Bases
- » Nuclear Energy Centers
- » Industrial & Petrochemical Plants
- » First Responder Facilities
- » Research & Educational Institutions
- » Transportation Hubs

### Underground Design

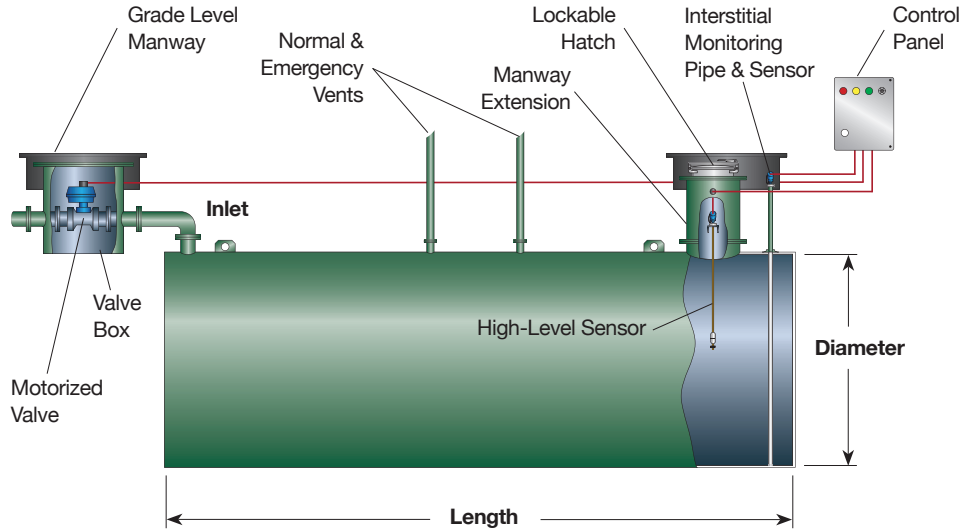

Volume Gallons	Nominal Inside Dimensions	
	Diameter	Length
500	4'-0"	5'-5"
1,000	4'-0"	10'-9"
1,000	5'-4"	6'-0"
1,500	5'-4"	9'-0"
2,000	5'-4"	12'-0"
2,500	5'-4"	15'-0"
3,000	5'-4"	18'-0"
4,000	5'-4"	24'-0"
4,000	6'-0"	19'-0"
4,000	8'-0"	10'-8"
5,000	6'-0"	23'-10"
5,000	8'-0"	13'-4"
6,000	6'-0"	28'-8"
6,000	8'-0"	16'-0"
8,000	10'-0"	14'-0"
8,000	8'-0"	21'-4"
10,000	10'-0"	17'-0"
10,000	8'-0"	26'-8"
12,000	10'-0"	20'-6"
12,000	8'-0"	32'-0"
15,000	10'-0"	25'-6"
15,000	8'-0"	40'-0"

### Aboveground Design

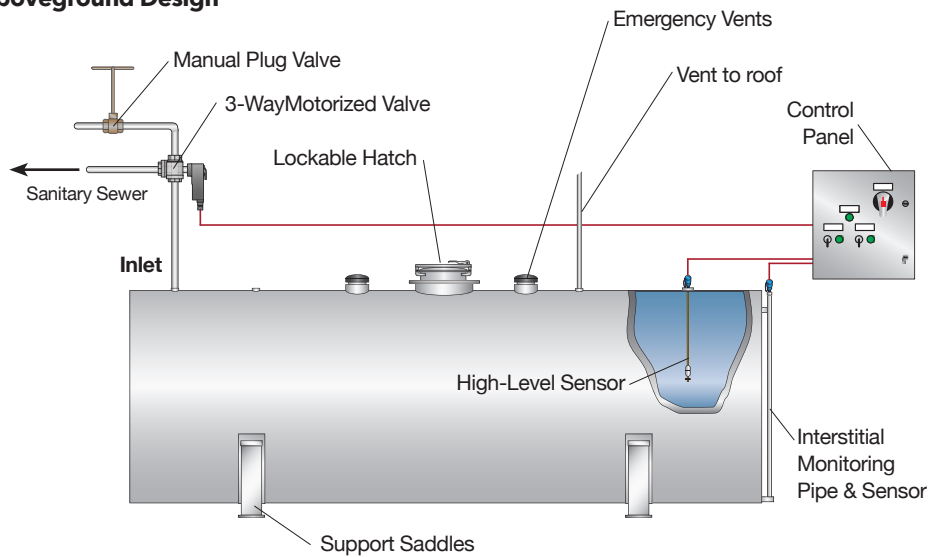

**Highland Tank**<sup>®</sup>

**Stoystown, PA**  
One Highland Road  
Stoystown, PA 15563-0338  
814.893.5701

**Manheim, PA**  
4535 Elizabethtown Road  
Manheim, PA 17545-9410  
717.664.0600

**Watervliet, NY**  
958 19th Street  
Watervliet, NY 12189-1752  
518.273.0801

**Greensboro, NC**  
2700 Patterson Street  
Greensboro, NC 27407-2317  
336.218.0801

**Lebanon, PA**  
2225 Chestnut Street  
Lebanon, PA 17042-2504  
717.664.0602

**Friedens, PA**  
1510 Stoystown Road  
Friedens, PA 15541-7402  
814.443.6800

**Clarkston, MI**  
4701 White Lake Road  
Clarkston, MI 48346-2554  
248.625.8700

**Mancelona, MI**  
9517 Lake Street  
Mancelona, MI 49659-7968  
231.587.8412



PROUDLY MADE IN AMERICA