
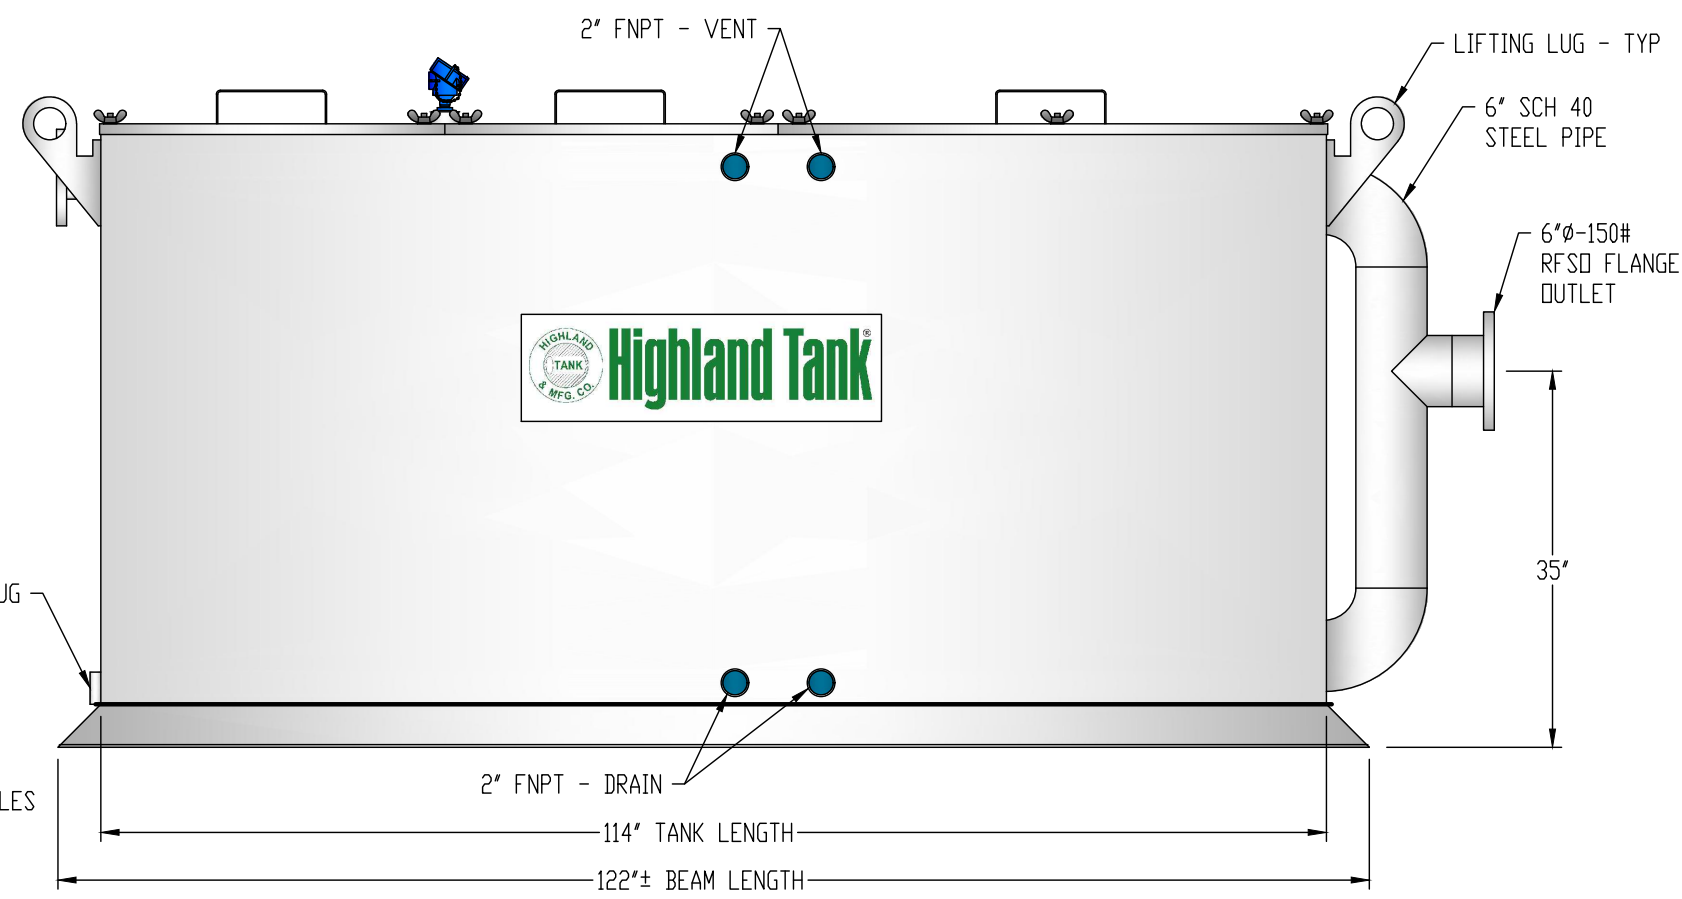
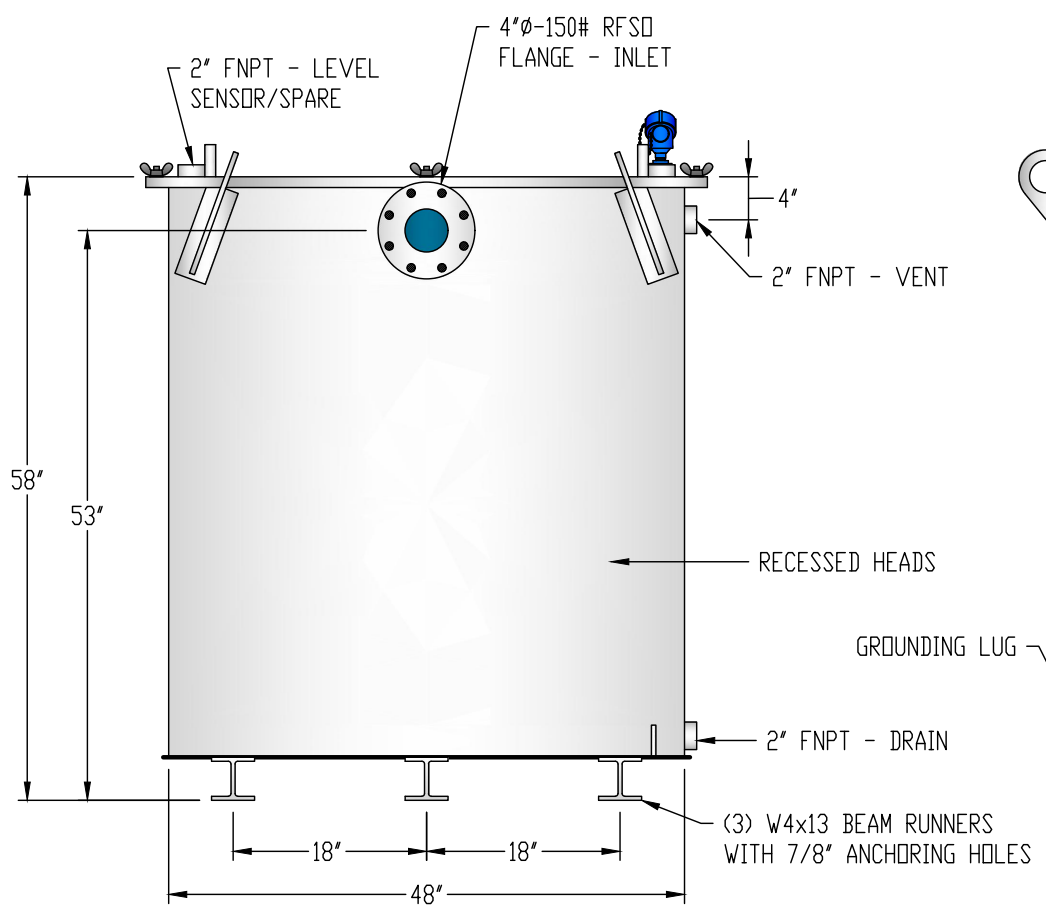


GENERAL SPECIFICATIONS

QUANTITY: ONE (1)
MODEL: HTM-ESP-INT-200 AG
MAXIMUM FLOW RATE: 200 GPM
TOTAL CAPACITY: 1,234 GALLONS
INTERCEPTOR STATIC CAPACITY: 532 GALLONS
MEDIA CHAMBER STATIC CAPACITY: 285 GALLONS
OIL CAPACITY: 68 GALLONS
TYPE: SINGLE WALL, ABOVE GROUND
MATERIAL: 7 GA CARBON STEEL WITH 1/4" BOTTOM
CONTINUOUS WELD INTERIOR AND EXTERIOR SEAMS
SURFACE PREP: SSPC-SP 10 BLAST INTERIOR SURFACES
SSPC-SP 6 BLAST EXTERIOR SURFACES
EXT. COATING: CHEMPRIME 3001 - 3-6 MILS
CHEMLINE 3300 WHITE - 2-3 MILS
INT. COATING: CHEMLINE 4200PW - 15 MILS

NOTE: UNIT TO SHIP WITH PLASTIC PLUGS IN ALL FITTINGS NOT OTHERWISE NOTED

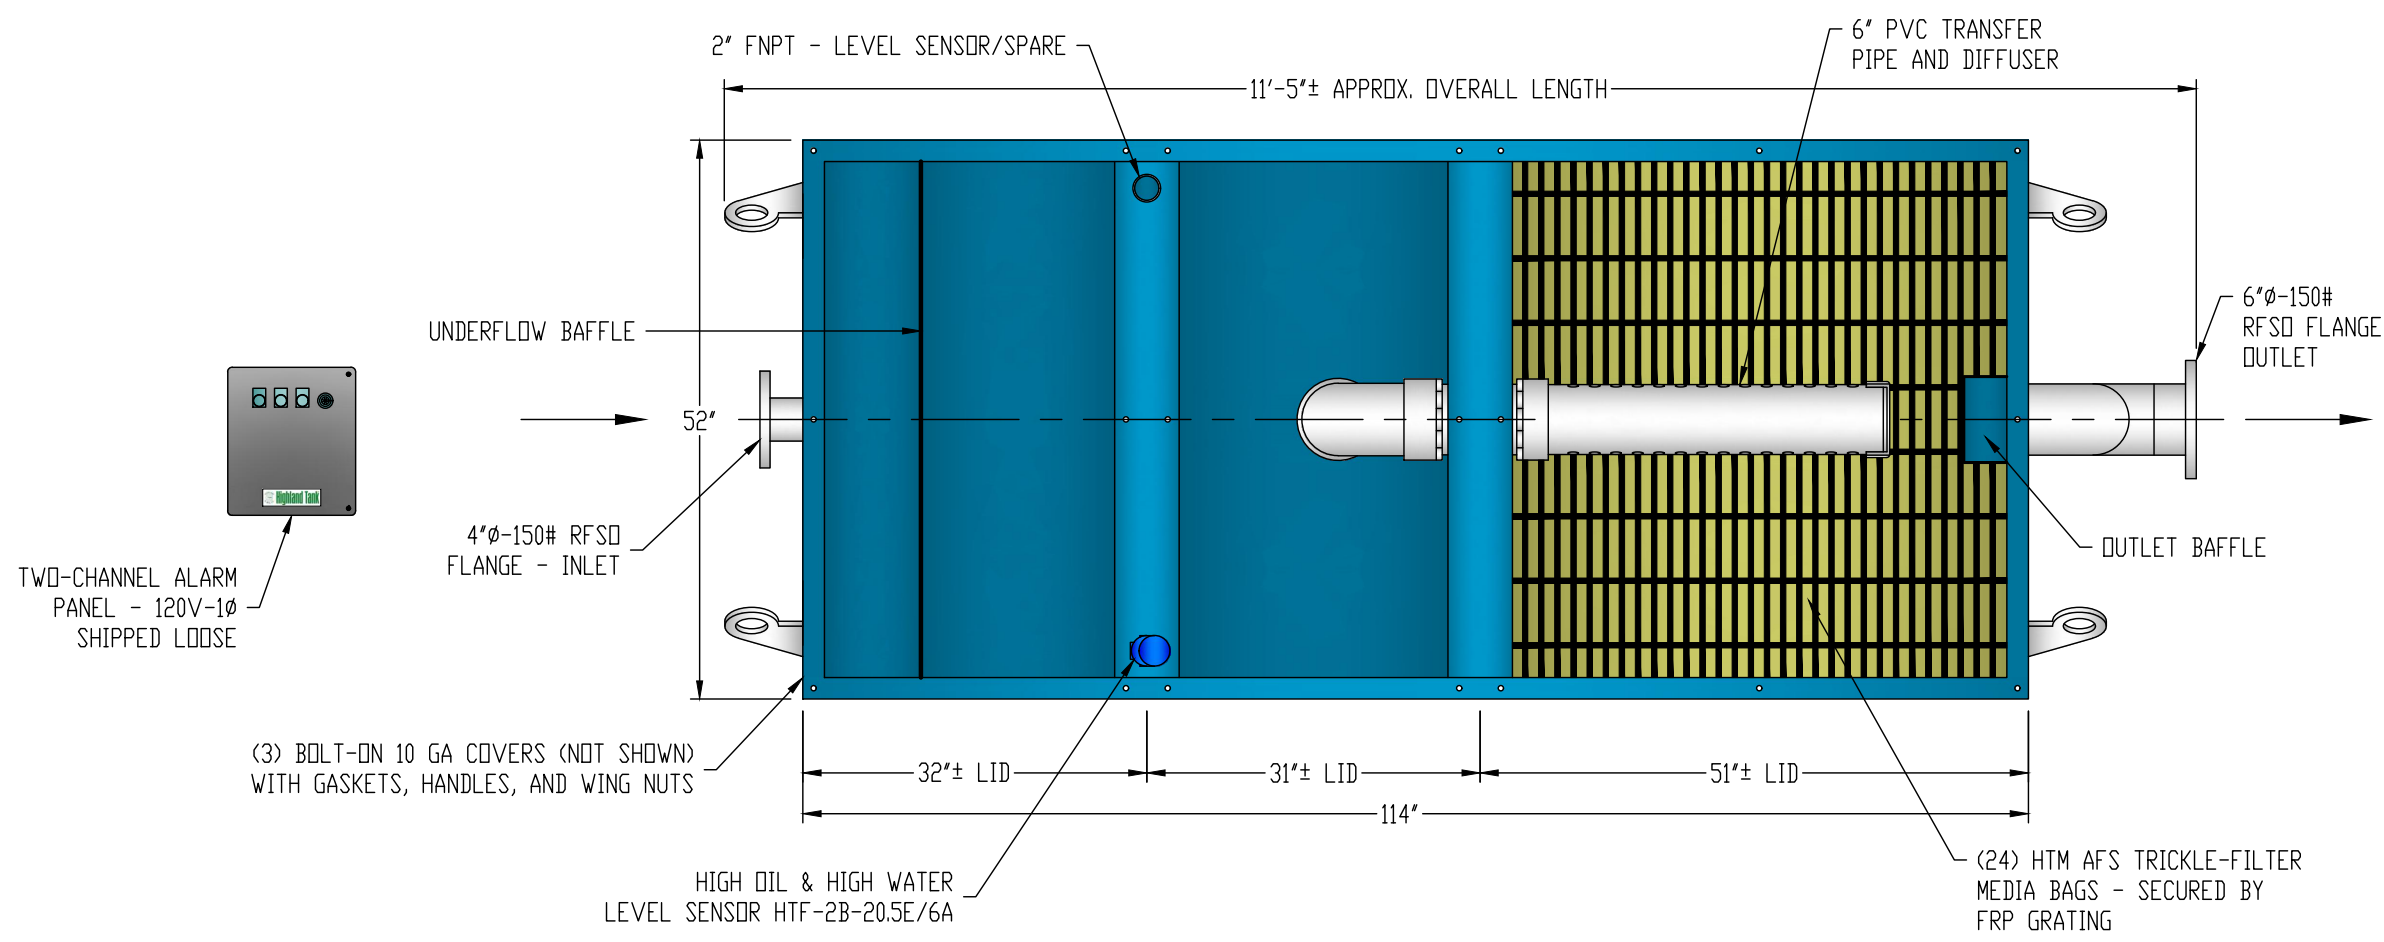

CUSTOMER APPROVAL

THE CUSTOMER HAS REVIEWED THIS DRAWING AND VERIFIED THE ACCURACY OF ALL INFORMATION AND DIMENSIONS.

SIGNED: _____

DATE: _____

NOTE: ALL RIGHTS RESERVED. THIS DRAWING, OR ANY PART THEREOF, MUST NOT BE REPRODUCED IN ANY FORM WITHOUT WRITTEN PERMISSION FROM HIGHLAND TANK. UNLESS OTHERWISE NOTED, HIGHLAND TANK SHALL BE RESPONSIBLE ONLY FOR ITEMS INDICATED ON THIS FABRICATION DRAWING. THE CUSTOMER IS RESPONSIBLE FOR VERIFYING THE CORRECTNESS OF THE TYPE, SIZE, AND LOCATION OF ALL FITTINGS, ACCESSORIES, AND COATINGS SHOWN ON THIS DRAWING.



200 GPM ELEVATOR SUMP INTERCEPTOR

HTM-ESP-INT-200 AG

CUSTOMER: _____

PROJECT: _____

QUOTE NO.: _____

SCALE: NTS DATE: 2/14/25 DWG. BY: MGS DWG. NO.: ESP-INT-200 AG