

NOTE: ALL RIGHTS RESERVED. THIS
DRAWING MUST NOT BE REPRODUCED IN
ANY FORM WITHOUT THE WRITTEN
PERMISSION OF HIGHLAND TANK®.
HIGHLAND TANK® SHALL BE RESPONSIBLE
ONLY FOR ITEMS INDICATED ON THIS
FABRICATION DRAWING UNLESS OTHERWISE
NOTED. CUSTOMER IS RESPONSIBLE FOR
VERIFYING CORRECTNESS OF SIZE AND
LOCATION OF FITTINGS, ACCESSORIES, AND
COATINGS SHOWN ON THIS DRAWING.

TOUCH UP OF FINISHED PAINT IS
REQUIRED BY INSTALLATION
CONTRACTOR. TOUCH UP PAINT SHIPPED
WITH TANK.



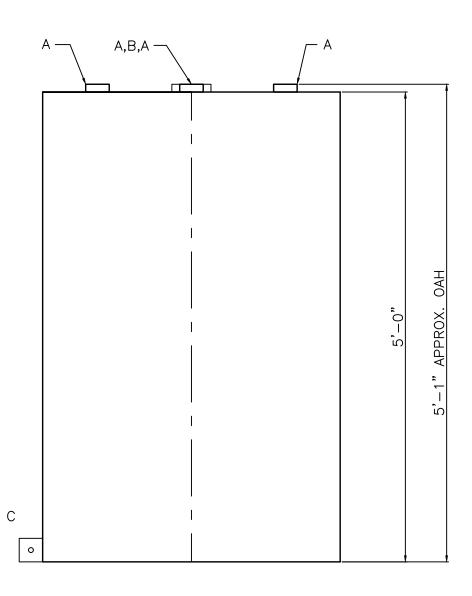

DESIGN DATA

CAPACITY - 300 GALLON

TYPE - SINGLE WALL ABOVEGROUND VERTICAL

NO. REQ. - -

OPERATING PRESSURE - ATMOSPHERIC

SPECIFIC GRAVITY = 1.0

TANK MATERIAL - MILD CARBON STEEL

THICKNESS — TOP: 10 GAUGE FLAT FLANGED THICKNESS — BOTTOM: 12 GAUGE

THICKNESS — SHELL: 12 GAUGE

CONSTRUCTION — LAP WELD OUTSIDE ONLY

TANK TEST - 2 PSIG

INT. FINISH - NONE

EXT. FINISH - SHOP PRIMER

LABEL - UL 142

<u>LEGEND</u>	
Α	2" FNPT FITTING
В	4" FNPT FITTING (EMERGENCY VENT USE)
С	GROUNDING LUG WITH 5/8" HOLE
D	_
Е	-
F	_

NOTES

- 1. SEE PLAN VIEW FOR TRUE ORIENTATION AND LOCATION OF FITTING
- 2. LIFTING LUGS FOR UNLOADING UNIT & STANDING UNIT UPRIGHT TO BE PLACED AS NEEDED BY FABRICATION SHOP
- 3. A 3x3x/4" STEEL GROUNDING LUG WITH A \%"\phi HOLE IN CENTER TO BE PLACED ON SHELL AT BOTTOM OF TANK IN LINE WITH LIFTING LUGS

