GENERAL SPECIFICATIONS

NO. REQ'D: (1)
CAPACITY: 350 GALLONS

TYPE: HT, HIGHGUARD, SINGLE WALL, "J" SERIES

MATERIAL: MILD CARBON STEEL FLOW RATE: 35 GPM

GAUGE:

SHELL- 7 GA. HEADS- 7 GA.

SURFACE PREP:

INTERIOR-

- SSPC NO.6 BLAST ALL EXTERIOR SURFACES - SSPC NO.10 BLAST ALL INTERIOR SURFACES OF WATER CHAMBER ONLY

COATING: MATERIAL **THICKNESS** (75 MILS) FXTFRIOR-HIGHGUARD


POLYURETHANE (15 MILS) INTERIOR OF WATER

CHAMBER ONLY

CONSTRUCTION: LAP FIT AND WELD ALL EXTERIOR SEAMS OPERATING PRESSURE: ATMOSPHERIC

1. POLYURETHANE HIGHGUARD TANK IS NOT APPROVED FOR THE STORAGE OF HEATED PRODUCTS


2. CUSTOMER TO PROVIDE PUMPING INFORMATION FOR PROPER PUMP SIZING & PUMPOUT DESIGN.

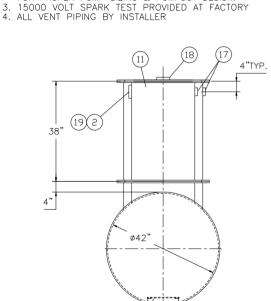

NOTE: ALL RIGHTS RESERVED. THIS DRAWING OR ANY PART THEREOF MUST NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF HIGHLAND TANK. HIGHLAND TANK SHALL BE RESPONSIBLE ONLY FOR ITEMS INDICATED

END VIEW

ON THIS FABRICATION DRAWING UNLESS OTHERWISE NOTED. CUSTOMER IS RESPONSIBLE FOR VERIFYING CORRECTIVESS OF SIZE / LOCATION OF FITTINGS, ACCESSORIES & COATINOS SHOWN ON THIS DRAWING

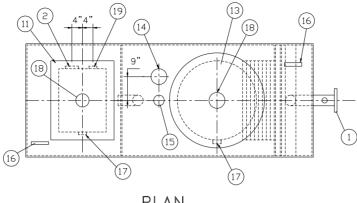

PLAN

PROVIDED FOUIPMENT

- 1. 150# R.F.S.O. FLANGE W/ 2" NPT FOR VENT
- 2. 4"ø FTG. FOR PUMP CONDUIT
- 3. VELOCITY HEAD DIFFUSION BAFFLE
- 4. WEAR PLATE
- 5. SEDIMENT CHAMBER
- 6. UNDERFLOW BAFFLE
- 7. SLUDGE BAFFLE
- 8. STRIKER PLATES
- 9. PARALLEL CORRUGATED PLATE COALESCER
- 10. OIL/WATER SEPARATOR CHAMBER
- 11. RECTANGULAR MANWAY W/ BOLT-ON EXTENSION SHIPPED
- 12. OUTLET DOWNCOMER
- 13. 30"ø MANWAY WITH BOLT-ON EXTENSION SHIPPED LOOSE
- 14. 4"Ø FTG.FOR OIL PUMP-OUT WITH INTERNAL PIPE INSTALLED & RISER PIPE SHIPPED LOOSE
- 15. 2"Ø FTG. FOR LEVEL SENSOR WITH RISER PIPE SHIPPED LOOSE
- 16. LIFTING LUG
- 17. 2"ø FTG. FOR VENT
- 18. 4"ø FTG. FOR GAUGE WITH PLUG
- 19. 2"Ø FTG. FOR EFFLUENT WATER CHAMBER LEVEL SENSOR
- 20. 1/4" BULKHFAD
- 21. FFFLUENT WATER CHAMBER
- 22. INTERNAL RIBBON ANODE
- 23. PUMP MOUNT

