## GENERAL SPECIFICATIONS

NO. REQ'D: (1)
CAPACITY: 1000 GALLON

TYPE: HT, HIGHGUARD, DOUBLE WALL, "G" SERIES MATERIAL: MILD CARBON STEEL

FLOW RATE: 100 GPM

GAUGE: INNER OUTER SHELL-10 GA. 7 GA. 7 GA. 10 GA. HEADS-

SURFACE PREP:


SSPC NO.6 BLAST ALL EXTERIOR SURFACES MATERIAL THICKNESS COATING:

EXTERIOR-HIGHGUARD (75 MILS) INTERIOR-NONE CONSTRUCTION: LAP FIT & WELD ALL EXTERIOR SEAMS

**OPERATING PRESSURE: ATMOSPHERIC** 


## NOTES:


- 1. POLYURETHANE HIGHGUARD TANK IS NOT APPROVED FOR THE STORAGE OF HEATED PRODUCTS
- 2. ALL VENT PIPING BY INSTALLER
  3. 15000 VOLT SPARK TEST PROVIDED AT FACTORY

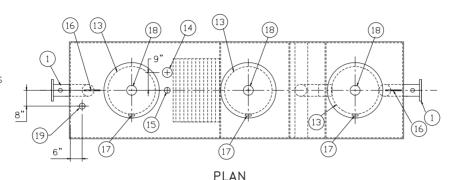

## PROVIDED FOUIPMENT

- 150# R.F.S.O. FLANGE W/ 2" NPT FOR VENT
- 2. 7 GA. BULKHEAD
- 3. VELOCITY HEAD DIFFUSION BAFFLE
- 4. WEAR PLATE
- 5. SEDIMENT CHAMBER
- 6. UNDERFLOW BAFFLE
- 7. SLUDGE BAFFLE
- 8. STRIKER PLATES
- 9. PARALLEL CORRUGATED PLATE COALESCER 10. OIL/WATER SEPARATOR CHAMBER
- 11. SLUDGE CHAMBER
- 12. OUTLET DOWNCOMER
- 13. 18"¢ MANWAY WITH BOLT-ON EXTENSION SHIPPED LOOSE
- 14. 4"Ø FTG. FOR OIL PUMP-OUT W/ INTERNAL PIPE INSTALLED AND RISER PIPE SHIPPED LOOSE
- 15. 2"ø FTG. FOR LEVEL SENSOR W/ RISER PIPE SHIPPED LOOSE
- 16. LIFTING LUG
- 17. 2"ø FTG. FOR VENT TYP. BOTH MANWAYS
- 18. 4"ø FTG. FOR GAUGE WITH PLUG TYP. BOTH MANWAYS 19. 2"ø FTG. FOR LEAK DETECTION

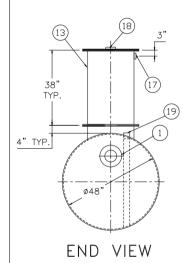

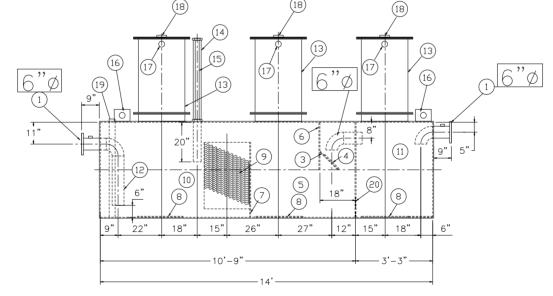

ALL RIGHTS RESERVED. THIS DRAWING OR ANY PART THEREOF MUST NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF HIGHLAND TANK

OF FITTINGS, ACCESSORIES & COATINGS SHOWN ON THIS DRAWING

**ELEVATION** 



REVISIONS