

NOTE: ALL RIGHTS RESERVED. THIS DRAWING MUST NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF HIGHLAND TANK®. HIGHLAND TANK®. SHALL BE RESPONSIBLE ONLY FOR ITEMS INDICATED ON THIS FABRICATION DRAWING UNLESS OTHERWISE NOTED. CUSTOMER IS RESPONSIBLE FOR VERIFYING CORRECTNESS OF SIZE AND LOCATION OF FITTINGS, ACCESSORIES, AND COATINGS SHOWN ON THIS DRAWING.

TOUCH UP OF FINISHED PAINT IS REQUIRED BY INSTALLATION CONTRACTOR. TOUCH UP PAINT SHIPPED WITH TANK.

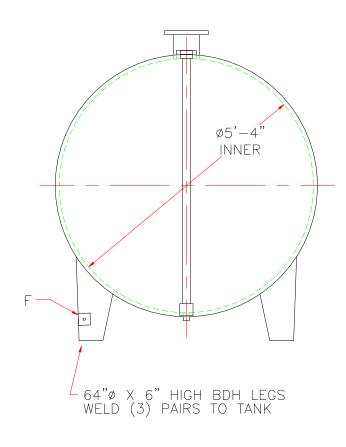

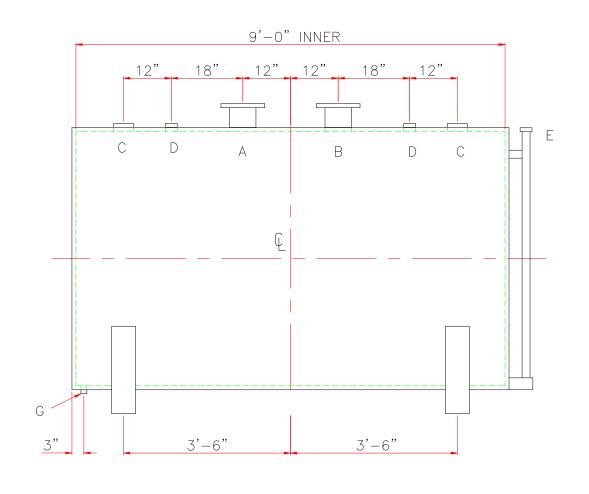

DESIGN DATA	Т
CAPACITY — 1,500 GALLONS	,
TYPE - DOUBLE WALL - TYPE I	
NO. REQ. —	
OPERATING PRESSURE — ATMOSPHERIC	'
SPECIFIC GRAVITY = 1.0	
TANK MATERIAL — MILD CARBON STEEL	
THICKNESS - INNER- HEADS: 7 GA SHELL: 7 GA	
THICKNESS - OUTER- HEADS: 10 GA SHELL:10 GA	(
CONSTRUCTION — INNER — LAP WELD OUTSIDE ONLY OUTER — LAP WELD OUTSIDE ONLY	
TANK TEST - INNER - 5 PSIG OUTER - 2 PSIG AND FULL VACUUM	
INT. FINISH — NONE —	
EXT. FINISH - SHOP PRIMER	
LABEL – UL 142	

TANK INTERIOR MUST BE CLEAN, DRY, AND DEBRIS FREE

	TANK INTERIOR MOOF BE GEDAN, BINT, AND BEBING		
	LEGEND		
HERIC	А	6" FFSO 150# FLANGE THROUGH OUTER SHELL ONLY, MARK WITH SPECIAL WARNING LABEL INTERSTITIAL EMERGENCY VENT USE ONLY	
STEEL GA SHELL: 7 GA	В	6" FFSO 150# FLANGE - PRIMARY EMERGENCY VENT USE	
GA SHELL:10 GA	С	4" FITTING	
VELD OUTSIDE ONLY WELD OUTSIDE ONLY	D	2" FITTING	
ND FULL VACUUM	Е	2" INTERSTITIAL MONITOR PIPE	
	F	3" x 3" PLATE w/ 1/2"ø (MIN.) HOLE ON CENTER (GROUNDING LUG- ONE REQ'D)	
	G	1/2" FITTING WITH DOPED STEEL PLUG	

