
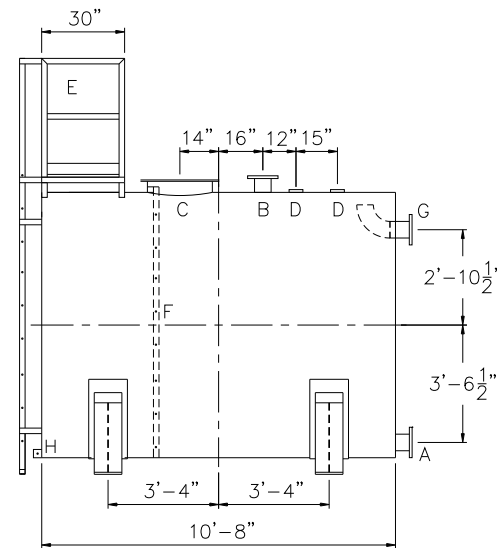


TOUCH UP OF FINISHED PAINT IS
REQUIRED BY INSTALLATION
CONTRACTOR. TOUCH UP PAINT SHIPPED
WITH TANK.

(2) 8' x 6" HIGH UL STYLE SADDLES, SHIP LOOSE WITH TANK.



DESIGN DATA	LEGEND	
CAPACITY – 4,000 GALLONS	A	FLANGE – SUPPLY
TYPE – POTABLE WATER TANK (PWT)	B	FLANGE – VENT
NO. REQ. – –	C	24" x 14" PLATE TIGHT BOLT MANWAY WITH 1" THICK NEO-CORK GASKET
OPERATING PRESSURE – ATMOSPHERIC	D	4" FNPT CONNECTION
TANK MATERIAL – MILD CARBON STEEL	E	STD HTM EXTERNAL LADDER & PLATFORM ASSEMBLY – PAINTED SAFETY YELLOW AND SHIPPED LOOSE FOR INSTALLATION ON SITE BY OTHERS
THICKNESS – HEADS: 5/16"	F	HTM STD INTERNAL LADDER
THICKNESS – SHELL: 1/4"	G	FLANGE WITH INTERNAL 90° ELBOW SHOWN – OVERFLOW
CONSTRUCTION – LAP WELD INSIDE AND OUTSIDE	H	FB-3"x 1/4"x3" WITH 5/8"Ø HOLE ON CL (GROUNDING LUG)
TANK TEST – 5 PSIG		
INT. FINISH – SP10 BLAST HighDRO®-LINER PLUS FOR NSF 61 APPLICATIONS		
EXT. FINISH – SSPC SP6 BLAST, WHITE URETHANE PAINT		
LABEL – NONE		

			
HighDRO [®] WATER STORAGE TANK 4,000 GAL 96"Ø AH POTABLE WATER TANK CUSTOMER: PROJECT:			
QUOTE NO:		CHK'D BY:	
SCALE: 1/4"=1'-0"	DATE: XX/XX/XX	DWG. BY: XXX	DWG. NO: 04000AHSWHDPTW96