

NOTE: ALL RIGHTS RESERVED. THIS DRAWING MUST NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF HIGHLAND TANK® FROM THE RESPONSIBLE ONLY FOR ITEMS INDICATED ON THIS FABRICATION DRAWING UNLESS OTHERWISE NOTED. CUSTOMER IS RESPONSIBLE FOR VERIFYING CORRECTNIESS OF SIZE AND LOCATION OF FITTINGS, ACCESSORIES, AND COATINGS SHOWN ON THIS DRAWING. TBUCH UP DE FINISHED PAINT IS REQUIRED BY INSTALLATION CONTRACTOR. TOUCH UP PAINT SHIPPED WITH TANK.



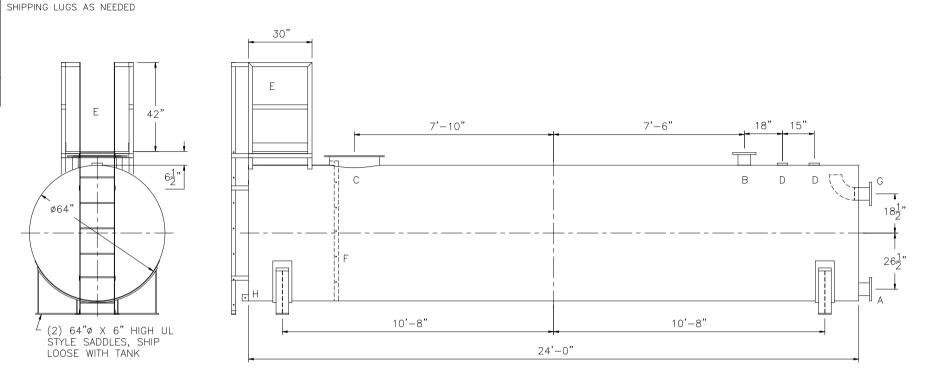

<u>DESIGN DATA</u>
CAPACITY - 4,000 GALLONS
TYPE – POTABLE WATER TANK (PWT)
NO. REQ
OPERATING PRESSURE - ATMOSPHERIC
SPECIFIC GRAVITY = 1.0
TANK MATERIAL — MILD CARBON STEEL
THICKNESS - HEADS: 7 GA THICKNESS - SHELL: 7 GA
CONSTRUCTION — LAP WELD INSIDE AND OUTSIDE
TANK TEST - 5 PSIG
INT. FINISH — SP10 BLAST HighDRO®—LINER PLUS FOR NSF 61 APPLICATIONS
EXT. FINISH — SSPC SP6 BLAST, WHITE URETHANE PAINT
LABEL - NONE

LEGEND	
Α	FLANGE - SUPPLY
В	FLANGE - VENT
С	24" X 4" PLATE TIGHT BOLT MANWAY WITH 1" THICK NEO-CORK GASKET
D	4" FNPT CONNECTION
Е	STD HTM EXTERNAL LADDER & PLATFORM ASSEMBLY — PAINTED SAFETY YELLOW AND SHIPPED LOOSE FOR INSTALLATION ON SITE BY OTHERS
F	HTM STD INTERNAL LADDER
G	FLANGE WITH INTERNAL 90° ELBOW SHOWN — OVERFLOW
Н	FB-3"x 1/4"x3" WITH 5/8"Ø HOLE ON CL (GROUNDING LUG)

