## GENERAL SPECIFICATIONS

NO. REQ'D: (1) CAPACITY: 4000 GALLON

TYPE: HT, HIGHGUARD, SINGLE WALL MATERIAL: MILD CARBON STEEL

FLOW RATE: 400 GPM

GAUGE:

INTERIOR-


SHELL- 7 GA. HEADS- 7 GA. SURFACE PREP:

SSPC NO.6 BLAST ALL EXTERIOR SURFACES COATING: MATERIAL THICKNESS EXTERIOR-POLYURETHANE (75 MILS) NONE


CONSTRUCTION : LAP FIT & WELD ALL EXTERIOR SEAMS


**OPERATING PRESSURE:** ATMOSPHERIC

- 1. POLYURETHANE HIGHGUARD TANK IS NOT APPROVED FOR THE STORAGE OF HEATED PRODUCTS
- 2. ALL VENT PIPING BY INSTALLER
- 3. 15000 VOLT SPARK TEST PROVIDED AT FACTORY

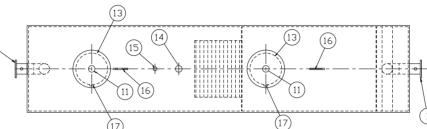

PLAN

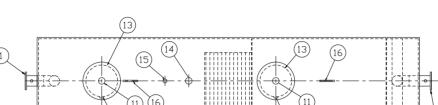

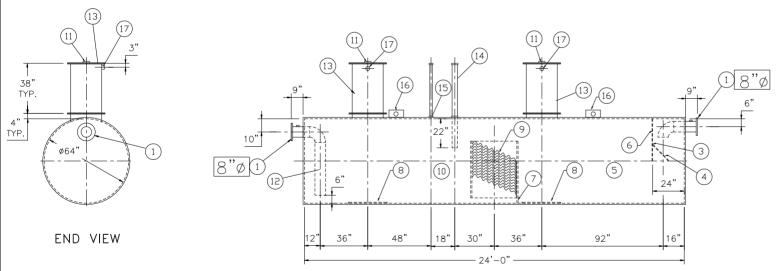

ALL RIGHTS RESERVED. THIS DRAWING OR ANY PART THEREOF MUST NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION

OF HIGHLAND TANK.

HIGHLAND TANK SHALL BE RESPONSIBLE ONLY FOR ITEMS INDICATED ON THIS FABRICATION DRAWING UNLESS OTHERWISE NOTED. CUSTOMER IS RESPONSIBLE FOR VERIFYING CORRECTNESS OF SIZE / LOCATION OF FITTINGS, ACCESSORIES & COATINGS SHOWN ON THIS DRAWING


**ELEVATION** 

## PROVIDED FOUIPMENT

- 1. 150# R.F.S.O. FLANGE
- 2. 2"ø FTG. FOR VENT TYP. BOTH MANWAYS.
- 3. VELOCITY HEAD DIFFUSION BAFFLE
- 4. WEAR PLATE
- SEDIMENT CHAMBER
- 6. UNDERFLOW BAFFLE
- 7. SLUDGE BAFFLE 8. STRIKER PLATES
- 9. PARALLEL CORRUGATED PLATE COALESCER. CORELLA PVC PLATES
- 10. OIL/WATER SEPARATOR CHAMBER

- 11. 4"Ø FTG. FOR GAUGE WITH PLUG TYP. BOTH MANWAYS.
  12. OUTLET DOWNCOMER
  13. 24"Ø MANWAY WITH BOLT-ON EXTENSION SHIPPED LOOSE
- 14. 4"Ø FTG. FOR OIL PUMPOUT W/INTERNAL PIPE INSTALLED & RISER PIPE SHIPPED LOOSE

  15. 2"Ø FTG. FOR LEVEL SENSOR W/ RISER PIPE SHIPPED LOOSE.
- 16. LIFTING LUG



REVISIONS