




TOUCH UP OF FINISHED PAINT IS REQUIRED BY INSTALLATION CONTRACTOR. TOUCH UP PAINT SHIPPED WITH TANK. SHIPPING LUGS AS NEEDED



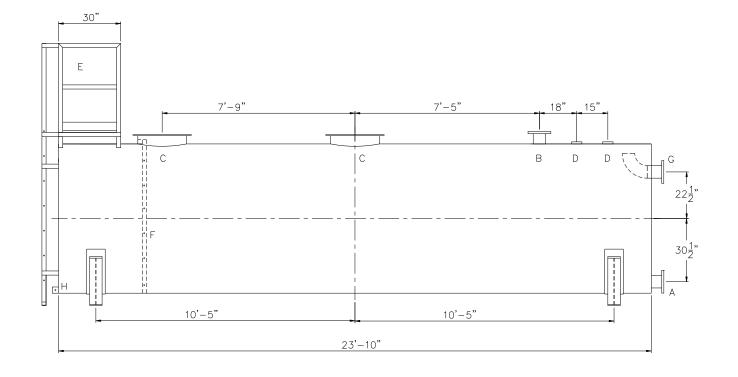



DESIGN DATA	LEGEND
CAPACITY - 5,000 GALLONS	A FLANGE - SUPPLY
TYPE – POTABLE WATER TANK (PWT)	
NO. REQ	B FLANGE - VENT
OPERATING PRESSURE - ATMOSPHERIC	C 24" X 4" PLATE TIGHT BOLT MANWAY WITH 8"
SPECIFIC GRAVITY = 1.0	THICK NEO-CORK GASKET
TANK MATERIAL - MILD CARBON STEEL	D 4" FNPT CONNECTION
THICKNESS - HEADS: 5/16"	
THICKNESS - SHELL: 1/4"	STD HTM EXTERNAL LADDER & PLATFORM R ASSEMBLY — PAINTED SAFETY YELLOW
CONSTRUCTION — LAP WELD INSIDE AND OUTSIDE	AND SHIPPED LOOSE FOR INSTALLATION ON SITE BY OTHERS
TANK TEST - 5 PSIG	F HTM STD INTERNAL LADDER
INT. FINISH - SP10 BLAST HighDRO®-LINER	T THE STD INTERNATE ENDOEN
PLUS FOR NSF 61 APPLICATIONS	G FLANGE WITH INTERNAL 90° ELBOW
EXT. FINISH - SSPC SP6 BLAST, WHITE URETHANE	SHOWN - OVERFLOW
PAINT	ы FB-3"x 1/4"x3" WITH 5/8"Ø HOLE ON CL
LABEL - NONE	(GROUNDING LUG)

