

NOTE: ALL RIGHTS RESERVED. THIS DRAWING MUST NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF HIGHLAND TANKE, HIGHLAND TANKE, ONLY FOR TEMS MIDICATED ON THIS FABRICATION DRAWING DULESS OTHERWISE NOTED. CUSTOMER IS RESPONSIBLE FOR VERTYING CORRECTINGS OF SIZE AND COATINGS SHOWN ON THIS DRAWING.

TOUCH UP OF FINISHED PAINT IS
REQUIRED BY INSTALLATION
CONTRACTOR. TOUCH UP PAINT SHIPPED
WITH TANK.



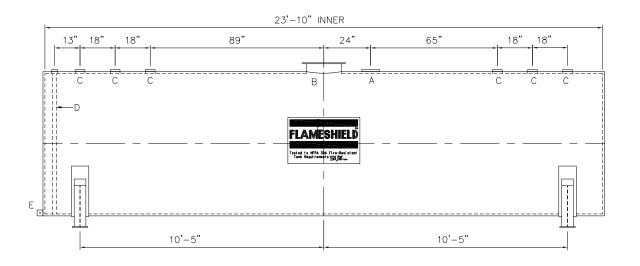

CAPACITY - 5,000 GALLONS TYPE - DOUBLE WALL - TYPE I
TYPE DOLIDLE WALL TYPE I
TIFE - DOUBLE WALL - TIPE I
NO. REQ
OPERATING PRESSURE - ATMOSPHERIC
SPECIFIC GRAVITY = 1.0
TANK MATERIAL - MILD CARBON STEEL
THICKNESS - INNER- HEADS: 5/16" SHELL: 1/4" THICKNESS - OUTER- HEADS: 10 GA SHELL: 10 GA
CONSTRUCTION — INNER — LAP WELD OUTSIDE ONLY OUTER — LAP WELD OUTSIDE ONLY
TANK TEST - INNER - 5 PSIG OUTER - 2 PSIG AND FULL VACUUM
INT. FINISH — NONE —
EXT. FINISH — SHOP PRIMER —
LABEL - UL 142, FLAMESHIELD PER sti AND swRI 97-04

		<u>LEGEND</u>
	Α	8" FITTING THROUGH OUTER SHELL ONLY — MARK WITH LABEL — SECONDARY EMERGENCY VENT USE ONLY
	В	18" LOOSE BOLT MANWAY - PRIMARY EMERGENCY VENTUSE
	С	4" FITTING
	D	2" INTERNAL INTERSTITIAL MONITOR PIPE
	Ε	FB-3"x 1/4"x3" WITH 5/8"Ø HOLE ON CL (GROUNDING LUG)
	F	_

