

NOTE: ALL RIGHTS RESERVED. THIS
DRAWING MUST NOT BE REPRODUCED IN
ANY FORM WITHOUT THE WRITTEN
PERMISSION OF HIGHLAND TANKE,
HIGHLAND TANKE SHALL BE RESPONSIBLE
ONLY FOR TIEMS INDICATED ON THIS
FABRICATION DRAWING UNLESS OTHERWISE
NOTED. CUSTOMER IS RESPONSIBLE FOR
VERTIFING CORPECTINESS OF SERIES, AND
COATINGS SHOWN ON THIS DRAWING.

TOUCH UP OF FINISHED PAINT IS REQUIRED BY INSTALLATION CONTRACTOR. TOUCH UP PAINT SHIPPED WITH TANK.



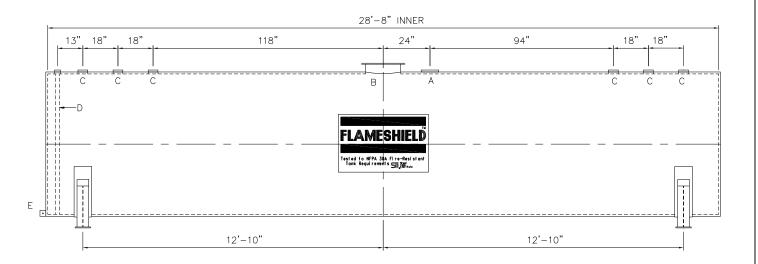

| CAPACITY - 6,000 GALLONS |
|--|
| TYPE - DOUBLE WALL - TYPE I |
| NO. REQ |
| OPERATING PRESSURE - ATMOSPHERIC |
| SPECIFIC GRAVITY = 1.0 |
| TANK MATERIAL - MILD CARBON STEEL |
| THICKNESS - INNER- HEADS: 5/16" SHELL: 1/4" THICKNESS - OUTER- HEADS: 10 GA SHELL: 10 GA |
| CONSTRUCTION — INNER — LAP WELD OUTSIDE ONLY OUTER — LAP WELD OUTSIDE ONLY |
| TANK TEST - INNER - 5 PSIG OUTER - 2 PSIG AND FULL VACUUM |
| INT. FINISH - NONE - |
| EXT. FINISH - SHOP PRIMER - |
| LABEL - UL 142, FLAMESHIELD PER sti AND swRI 97-04 |

LEGEND

A 8" FITTING THROUGH OUTER SHELL ONLY - MARK WITH LABEL - SECONDARY EMERGENCY VENT USE ONLY

B 18" LOOSE BOLT MANWAY - PRIMARY EMERGENCY VENT USE

C 4" FITTING

D 2" INTERNAL INTERSTITIAL MONITOR PIPE

E FB-3"x 1/4"x3" WITH 5/8"Ø HOLE ON CL (GROUNDING LUG)

F -

