GENERAL SPECIFICATIONS

NO. REQ'D:(1)

INTERIOR-

CAPACITY: 6000 GALLON

TYPE: HT, HIGHGUARD, DOUBLE WALL, "G" SERIES

MATERIAL: MILD CARBON STEEL

FLOW RATE: 600 GPM

 GAUGE:
 INNER
 OUTER

 SHELL 7 GA.
 10 GA.

 HEADS 7 GA.
 7 GA.

SURFACE PREP: SP-6 BLAST ALL EXTERIOR SURFACES


COATING: MATERIAL EXTERIOR— HIGHGUARD

MATERIAL THICKNESS
HIGHGUARD 75 MILS

NONE

CONSTRUCTION : LAP FIT & WELD ALL EXTERIOR SEAMS

OPERATING PRESSURE: ATMOSPHERIC

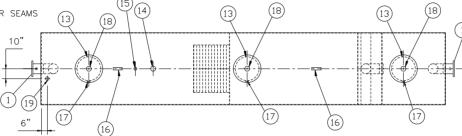


PLAN

NOTES:


- POLYURETHANE HIGHGUARD TANK IS NOT APPROVED FOR THE STORAGE OF HEATED PRODUCTS
- 2. ALL VENT PIPING BY INSTALLER
- 3. 15000 VOLT SPARK TEST PROVIDED AT FACTORY

PROVIDED EQUIPMENT

- 1. 150# R.F.S.O. FLANGE W/ 2" NPT FOR VENT
- 2. SLUDGE CHAMBER
- 3. VELOCITY HEAD DIFFUSION BAFFLE
- 4. WEAR PLATE
- 5. SEDIMENT CHAMBER
- 6. UNDERFLOW BAFFLE
- 7. SLUDGE BAFFLE
- 8. STRIKER PLATES
- 9. PARALLEL CORRUGATED PLATE COALESCER
- 10. OIL/WATER SEPARATOR CHAMBER
- 11. SLUDGE CHAMBER
- 12. OUTLET DOWNCOMER
- 13. 18" MANWAY WITH BOLT-ON EXTENSION SHIPPED LOOSE
- 14. 4"Ø FTG. FOR OIL PUMP-OUT W/ INTERNAL PIPE INSTALLED AND RISER PIPE SHIPPED LOOSE
- 15. 2"Ø FTG. FOR LEVEL SENSOR W/ RISER PIPE SHIPPED LOOSE
- 16. LIFTING LUG
- 17. 2"ø FTG. FOR VENT TYP. BOTH MANWAYS
- 18. 4"ø FTG. FOR GAUGE WITH PLUG TYP. BOTH MANWAYS
- 19. 2"ø FTG. FOR LEAK DETECTION
- 20. 7 GA. BULKHFAD



END VIEW

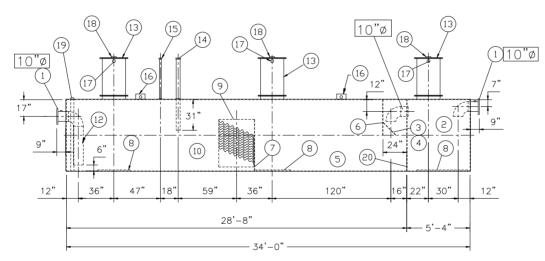

NOTE: ALL RIGHTS RESERVED. THIS DRAWING OR ANY PART THEREOF MUST

NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF HIGHLAND TANK.

HIGHLAND TANK SHALL BE RESPONSIBLE ONLY FOR ITEMS INDICATED ON THIS FABRICATION DRAWING UNLESS OTHERWISE NOTED. CUSTOMER IS RESPONSIBLE FOR VERIFYING CORRECTNESS OF SIZE / LOCATION OF FITTINGS . ACCESSORIES & COATINGS SHOWN ON THIS DRAWING

ELEVATION

