## GENERAL SPECIFICATIONS NO. REQ'D: (1) CAPACITY: 7,000 GALLONS TYPE: HT, HIGHGUARD, SINGLE WALL, "G" SERIES MATERIAL: MILD CARBON STEEL FLOW RATE: 700 GPM GAUGE: SHELL- 1/4" HEADS- 1/4"

SURFACE PREP:

NOTES:


- 1. POLYURETHANE HIGHGUARD TANK IS NOT APPROVED FOR THE STORAGE OF HEATED PRODUCTS
- 2. ALL VENT PIPING BY INSTALLER
- 3. 15000 VOLT SPARK TEST PROVIDED AT FACTORY

SSPC NO.6 BLAST ALL EXTERIOR SURFACES

COATING: MATERIAL **THICKNESS** EXTERIOR-HIGHGUARD (75 MILS) INTERIOR-NONE

CONSTRUCTION: LAP FIT AND WELD ALL EXTERIOR SEAMS


**OPERATING PRESSURE: ATMOSPHERIC** 

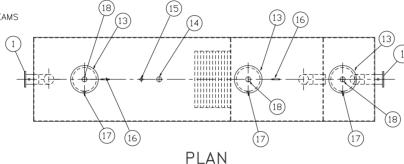


## PROVIDED EQUIPMENT

- 1. 150# R.F.S.O. FLANGE W/ 2" NPT FOR VENT 2. 7 GA. BULKHEAD
- 3. VELOCITY HEAD DIFFUSION BAFFLE
- 4. WEAR PLATE
- 5. SEDIMENT CHAMBER 6. UNDERFLOW BAFFI F
- 7. SLUDGE BAFFLE
- 8. STRIKER PLATES
- 9. PARALLEL CORRUGATED PLATE COALESCER
  10. OIL/WATER SEPARATOR CHAMBER

- 11. SLUDGE CHAMBER
  12. OUTLET DOWNCOMER
- 13. 24"Ø MANWAY WITH BOLT-ON EXTENSION SHIPPED LOOSE
- 14. 4"ø FTG. FOR OIL PUMP-OUT W/ INTERNAL PIPE INSTALLED AND RISER PIPE SHIPPED LOOSE
- 15. 2"Ø FTG. FOR LEVEL SENSOR W/ RISER PIPE SHIPPED LOOSE
- 16. LIFTING LUG
- 17. 2"Ø FTG. FOR VENT TYP. BOTH MANWAYS 18. 4"Ø FTG. FOR GAUGE WITH PLUG TYP. BOTH MANWAYS

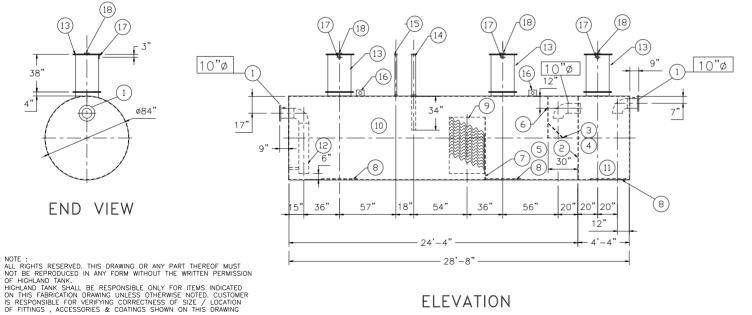



**ELEVATION**