
GENERAL SPECIFICATIONS 1. POLYURETHANE HIGHGUARD TANK IS NOT APPROVED NO. REQ'D: (1) FOR THE STORAGE OF HEATED PRODUCTS CAPACITY: 8,000 GALLONS TYPE: HT, HIGHGUARD, SINGLE WALL, "G" SERIES MATERIAL: MILD CARBON STEEL 2. ALL VENT PIPING BY INSTALLER 3. 15000 VOLT SPARK TEST PROVIDED AT FACTORY FLOW RATE: 800 GPM GAUGE: SHELL- 1/4" HEADS- 1/4" SURFACE PREP: SSPC NO.6 BLAST ALL EXTERIOR SURFACES COATING: MATERIAL THICKNESS EXTERIOR-(75 MILS) HIGHGUARD INTERIOR-NONE CONSTRUCTION: LAP FIT AND WELD ALL EXTERIOR SEAMS **OPERATING PRESSURE: ATMOSPHERIC** (16) (18 (18 (17) PLAN

PROVIDED FOUIPMENT

- 1. 150# R.F.S.O. FLANGE W/ 2" NPT FOR VENT
- 2. 7 GA. BULKHEAD
- 3. VELOCITY HEAD DIFFUSION BAFFLE
- 4. WEAR PLATE
- 5. SEDIMENT CHAMBER
- 6. UNDERFLOW BAFFLE
- SLUDGE BAFFLE
- 8. STRIKER PLATES
- 9. PARALLEL CORRUGATED PLATE COALESCER
- 10. OIL/WATER SEPARATOR CHAMBER
- 11. SLUDGE CHAMBER
- 12. OUTLET DOWNCOMER
- 13. 24"Ø MANWAY WITH BOLT-ON EXTENSION SHIPPED LOOSE
- 14. 4"ø FTG. FOR OIL PUMP-OUT W/ INTERNAL PIPE INSTALLED AND RISER PIPE SHIPPED LOOSE
- 15. 2"Ø FTG. FOR LEVEL SENSOR W/ RISER PIPE SHIPPED LOOSE
- 16. LIFTING LUG
- 17. 2" FTG. FOR VENT TYP. BOTH MANWAYS
 18. 4" FTG. FOR GAUGE WITH PLUG TYP. BOTH MANWAYS



ELEVATION

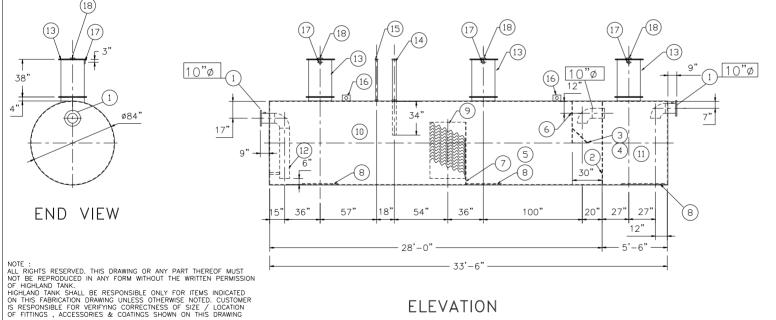