GENERAL SPECIFICATIONS

NO. REQ'D: (1)
CAPACITY: 9,000 GALLONS

TYPE: HT, HIGHGUARD, SINGLE WALL MATERIAL: MILD CARBON STEEL

FLOW RATE: 900 GPM

GAUGE:

SHELL- 1/4" HEADS-1/4" SURFACE PREP:

SSPC NO.6 BLAST ALL EXTERIOR SURFACES

COATING: EXTERIOR- MATERIAL


THICKNESS (75 MILS)

POLYURETHANE NONE


INTERIOR-CONSTRUCTION: LAP FIT AND WELD ALL EXTERIOR SEAMS

OPERATING PRESSURE : ATMOSPHERIC

- 1. POLYURETHANE HIGHGUARD TANK IS NOT APPROVED FOR THE STORAGE OF HEATED PRODUCTS
- 2. ALL VENT PIPING BY INSTALLER
- 3. 15000 VOLT SPARK TEST PROVIDED AT FACTORY

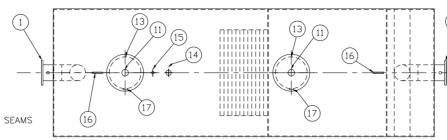

PLAN

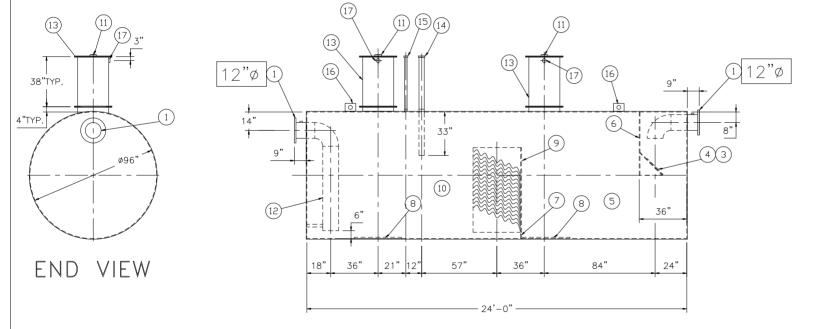

NOTE:

ALL RIGHTS RESERVED. THIS DRAWING OR ANY PART THERE OF MUST NOT BE REPRODUCED IN ANY FORM WITH OUT THE WRITTEN PERMISSION OF HIGHLAND TANK

HIGHLAND TANK SHALL BE RESPONSIBLE ONLY FOR ITEMS INDICATED ON THIS FABRICATION DRAWING UNLESS OTHERWISE NOTED. CUSTOMER

IS RESPONSIBLE FOR VERIFYING CORRECTNESS OF SIZE / LOCATION OF FITTINGS , ACCESSORIES & COATINGS SHOWN ON THIS DRAWING

ELEVATION

PROVIDED EQUIPMENT

- 1. 150# R.F.S.O. FLANGE
- 2. 2"ø FTG. FOR VENT TYP. BOTH MANWAYS.
- 3. VELOCITY HEAD DIFFUSION BAFFLE
- 4. WEAR PLATE
- 5. SEDIMENT CHAMBER
- 6. UNDERFLOW BAFFLE
- 7. SLUDGE BAFFLE
- STRIKER PLATES
- 9. PARALLEL CORRUGATED PLATE COALESCER, CORELLA PVC PLATES
- 10. OIL/WATER SEPARATOR CHAMBER
- 11. 4"ø FTG. FOR GAUGE WITH PLUG TYP. BOTH MANWAYS. 12. OUTLET DOWNCOMER
- 13. 24" MANWAY WITH BOLT-ON EXTENSION SHIPPED LOOSE
- 14. 4"ø FTG. FOR OIL PUMPOUT W/INTERNAL PIPE INSTALLED & RISER PIPE SHIPPED LOOSE
- 15. 2"ø FTG. FOR LEVEL SENSOR W/ RISER PIPE SHIPPED LOOSE.
- 16. LIFTING LUG



REVISIONS