SHIP LOOSE

INSTALLED

ø10'-6"

INNER

(2) 8" FLANGED EMERGENCY VENTS

11'

**EMERGENCY** VENT

 $\hat{\phi}10' - 6'$ 

OUTER

-SHIPMENT BANDING HOLES,

2" HOLE TYP-

123"

45"

(2) PER SADDLE TYP.

45"

DESIGN DATA


(1) HIGH-LINK LEVEL MODULE MODEL# LS\_XEXD 126" LONG & BUSHING.

TOUCH UP OF FINISHED PAINT IS REQUIRED BY INSTALLATION CONTRACTOR. TOUCH UP PAINT SHIPPED WITH TANK.

SHIPPING LUGS AS NEEDED


NOTE: ALL RIGHTS RESERVED. THIS DRAWING MUST NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF HIGHLAND TANK®.
HIGHLAND TANK® SHALL BE RESPONSIBLE
ONLY FOR ITEMS INDICATED ON THIS FABRICATION DRAWING UNLESS OTHERWISE NOTED. CUSTOMER IS RESPONSIBLE FOR VERIFYING CORRECTNESS OF SIZE AND COATINGS SHOWN ON THIS DRAWING.



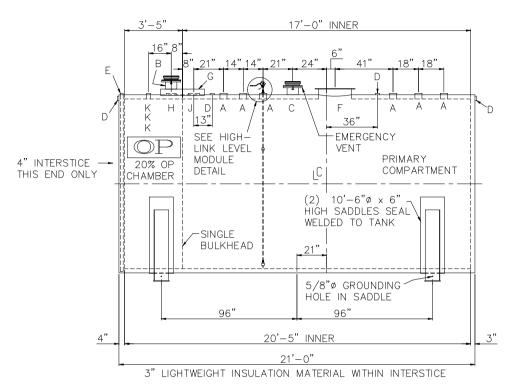

CAPACITY: 10,000 GALLONS
TYPE: FIREGUARD® CYLINDRICAL
FIREGUARD® IS A TRADEMARK OF THE STEEL TANK INSTITUTE
NO. REQ. — —
OPERATING PRESSURE — ATMOSPHERIC
SPECIFIC GRAVITY = 1.0
TANK MATERIAL – MILD CARBON STEEL
THICKNESS - INNER - HEADS: 5/16", SHELL: 1/4" THICKNESS - OUTER - HEADS: 5/16", SHELL: 1/4" MIN. GAUGE OR THICKNESS (PER U.L. 2085)
CONSTRUCTION — INNER — LAP WELD OUTSIDE ONLY
CONSTRUCTION — OUTER — LAP WELD OUTSIDE ONLY
TANK TEST - PER UL 2085
INT. FINISH — NONE
EXT. FINISH — SP—6 BLAST, FINISH PAINT WHITE

LABEL- UL 2085 AND FIREGUARD® PER sti

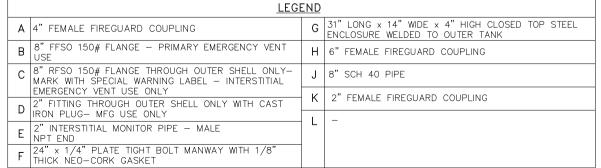

STRIKER PLATES ARE NOT SUPPLIED ON FIREGUARDS® UNLESS SPECIFIED

