

TOUCH UP OF FINISHED PAINT IS
REQUIRED BY INSTALLATION
CONTRACTOR. TOUCH UP PAINT SHIPPED
WITH TANK.

SHIP LOOSE



(2) 8" FLANGED EMERGENCY VENTS

(1) HIGH-LINK LEVEL SHIELD MODEL# LS_XEXD_2750 108"
LONG & BUSHING WITH LS_LINK_GPRS COMMUNICATION BOX.




4" INTERSTICE —
THIS HEAD ONLY

SHIPMENT BANDING
HOLES (2) PER
SADDLE

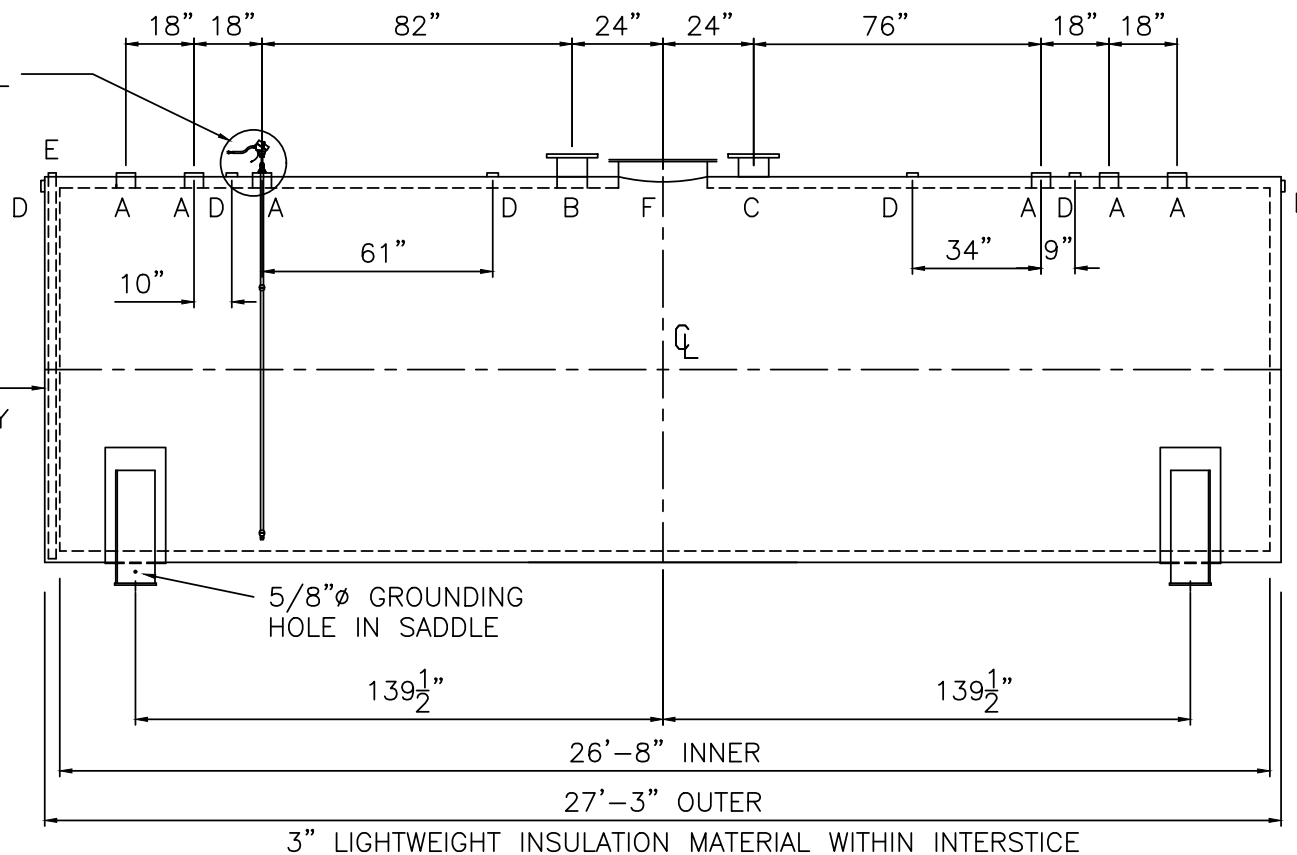

HIGH-LINK LEVEL SHIELD DETAIL



COMMUNICATION
BOX DETAIL

DESIGN DATA

CAPACITY : 10,000 GALLON

TYPE: FIREGUARD® CYLINDRICAL

FIREGUARD® IS A TRADEMARK OF THE STEEL TANK INSTITUTE

NO. REQ. - -

OPERATING PRESSURE – ATMOSPHERIC

SPECIFIC GRAVITY = 1.0

TANK MATERIAL - MILD CARBON STEEL

THICKNESS - INNER- HEADS: 5/16", SHELL: 1/4"

THICKNESS - OUTER- HEADS: 5/16", SHELL: 1/4"
MIN. GAUGE OR THICKNESS (PER U.L. 2085)

CONSTRUCTION - INNER - LAP WELD OUTSIDE ONLY

CONSTRUCTION - OUTER - LAP WELD OUTSIDE ONLY

TANK TEST - INNER - 5 PSIG

OUTER - 5 PSIG

INT. FINISH - NONE

EXT. FINISH - SP-6 BLAST, FINISH PAINT WHITE

LABEL— UL 2085 AND FIREGUARD® PER sti

FITTING LEGEND

A	4" FEMALE FG COUPLING
B	8" FFSO 150# FLANGE – PRIMARY EMERGENCY VENT USE ONLY
C	8" FFSO 150# FLANGE THROUGH OUTER SHELL ONLY, MARK WITH SPECIAL WARNING LABEL INTERSTITIAL EMERGENCY VENT USE ONLY
D	2" FITTING THROUGH OUTER SHELL ONLY WITH CAST IRON PLUG– MFG USE ONLY
E	2" MONITOR PIPE WITH MALE NPT END
F	24" x 1/4" PLATE TIGHT BOLT MANWAY WITH 1/8" THICK FIBREFLEX GASKET

NOTES:

STRIKER PLATES ARE NOT SUPPLIED ON
FIREGUARDS® UNLESS SPECIFIED

