
GENERAL SPECIFICATIONS PROVIDED FOUIPMENT 1. POLYURETHANE HIGHGUARD TANK IS NOT APPROVED FOR THE STORAGE OF HEATED PRODUCTS NO. REQ'D: (1) CAPACITY: 10,000 GALLONS TYPE: HT, HIGHGUARD, DOUBLE WALL, "G" SERIES 1. 150# R.F.S.O. FLANGE W/ 2" NPT FOR VENT 2. 7 GA. BULKHEAD 2. ALL VENT PIPING BY INSTALLER 3. VELOCITY HEAD DIFFUSION BAFFLE 3. 15000 VOLT SPARK TEST PROVIDED AT FACTORY MATERIAL: MILD CARBON STEEL 4. WEAR PLATE FLOW RATE: 1,000 GPM 5. SEDIMENT CHAMBER GAUGE: INNER OUTER 6. UNDERFLOW BAFFLE 7. SLUDGE BAFFLE SHELL-1/4" 10 GA. 8. STRIKER PLATES HEADS-7 GA. 9. PARALLEL CORRUGATED PLATE COALESCER SURFACE PREP: 10. OIL/WATER SEPARATOR CHAMBER SSPC NO.6 BLAST ALL EXTERIOR SURFACES 11. SLUDGE CHAMBER 12. OUTLET DOWNCOMER COATING: MATERIAL **THICKNESS** (75 MILS) EXTERIOR-HIGHGUARD 13. 18"Ø MANWAY WITH BOLT-ON EXTENSION SHIPPED LOOSE INTERIOR-NONE 14. 4"Ø FTG. FOR OIL PUMP-OUT W/ INTERNAL PIPE INSTALLED AND RISER PIPE SHIPPED LOOSE CONSTRUCTION : LAP FIT AND WELD ALL EXTERIOR SEAMS 2"Ø FTG. FOR LEVEL SENSOR W/ RISER PIPE SHIPPED LOOSE (18 **OPERATING PRESSURE: ATMOSPHERIC** 16. LIFTING LUG 17. 2"ø FTG. FOR VENT TYP. BOTH MANWAYS 18. 4"ø FTG. FOR GAUGE WITH PLUG TYP. BOTH MANWAYS 19. 2"Ø FTG. FOR LEAK DETECTION пппппппппп (19) (16` (17) PLAN

ELEVATION



HIGHLAND TANK SHALL BE RESPONSIBLE ONLY FOR ITEMS INDICATED

ON THIS FABRICATION DRAWING UNLESS OTHERWISE NOTED. CUSTOMER IS RESPONSIBLE FOR VERTING CORRECTIVESS OF SIZE / LOCATION OF FITTINGS, ACCESSORIES & COATINOS SHOWN ON THIS DRAWING

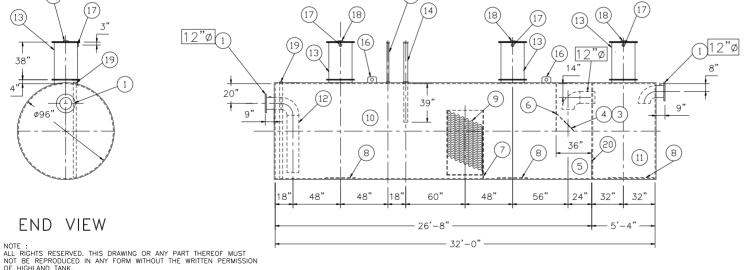

REVISIONS