
## 1. POLYURETHANE HIGHGUARD TANK IS NOT APPROVED NO. REQ'D: (1) CAPACITY: 10,000 GALLONS TYPE: HT, HIGHGUARD, SINGLE WALL, "G" SERIES FOR THE STORAGE OF HEATED PRODUCTS 2. ALL VENT PIPING BY INSTALLER 3. 15000 VOLT SPARK TEST PROVIDED AT FACTORY MATERIAL: MILD CARBON STEEL FLOW RATE: 1,000 GPM GAUGE: SHELL- 1/4" HEADS- 1/4" SURFACE PREP: SSPC NO.6 BLAST ALL EXTERIOR SURFACES COATING: MATERIAL **THICKNESS** (75 MILS) EXTERIOR-HIGHGUARD (18) INTERIOR-NONE CONSTRUCTION : LAP FIT AND WELD ALL EXTERIOR SEAMS (18 **OPERATING PRESSURE: ATMOSPHERIC** (16 пппппппппп (16) (17) PLAN



- 1. 150# R.F.S.O. FLANGE W/ 2" NPT FOR VENT
- 2. 7 GÄ. BULKHEAD
- 3. VELOCITY HEAD DIFFUSION BAFFLE
- 4. WEAR PLATE
- 5. SEDIMENT CHAMBER
- 6. UNDERFLOW BAFFLE
- 7. SLUDGE BAFFLE
- 8. STRIKER PLATES
- 9. PARALLEL CORRUGATED PLATE COALESCER
- 10. OIL/WATER SEPARATOR CHAMBER
- 11. SLUDGE CHAMBER
- 12. OUTLET DOWNCOMER
- 13. 24"Ø MANWAY WITH BOLT-ON EXTENSION SHIPPED LOOSE
- 14. 4"0 FTG. FOR OIL PUMP-OUT W/ INTERNAL PIPE INSTALLED AND RISER PIPE SHIPPED LOOSE
- 15. 2"ø FTG. FOR LEVEL SENSOR W/ RISER PIPE SHIPPED LOOSE
- 16. LIFTING LUG
- 17. 2"ø FTG. FOR VENT TYP. BOTH MANWAYS
- 18. 4"ø FTG. FOR GAUGE WITH PLUG TYP. BOTH MANWAYS

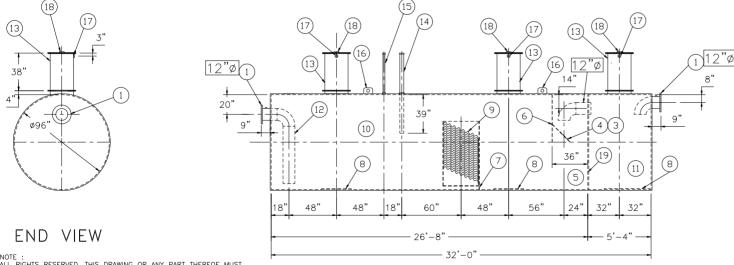


ALL RIGHTS RESERVED. THIS DRAWING OR ANY PART THEREOF MUST NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF HIGHLAND TANK. HIGHLAND TANK SHALL BE RESPONSIBLE ONLY FOR ITEMS INDICATED

GENERAL SPECIFICATIONS

HIGHLAND TANK SHALL BE RESPONSIBLE ONLY FOR ITEMS INDICATED ON THIS FABRICATION DRAWING UNLESS OTHERWISE NOTED. CUSTOMER S RESPONSIBLE FOR VERIFYING CORRECTNESS OF SIZE / LOCATION OF FITTINGS, ACCESSORIES & COATINGS SHOWN ON THIS DRAWING

**ELEVATION** 



REVISIONS