SHIP LOOSE

EMERGENCY

ø10'-6"

OUTER

∟SHIPMENT BANDING HOLES,

123"

(2) PER SADDLE TYP.

2" HOLE TYP.

45"

VENT

INSTALLED

ø10'-6'

45"

INNER


(2) 8" FLANGED EMERGENCY VENTS (1) HIGH-LINK LEVEL MODULE MODEL# LS_XEXD 126" LONG & BUSHING.

TOUCH UP OF FINISHED PAINT IS REQUIRED BY INSTALLATION CONTRACTOR. TOUCH UP PAINT SHIPPED WITH TANK.

SHIPPING LUGS AS NEEDED


NOTE: ALL RIGHTS RESERVED. THIS
DRAWING MUST NOT DE REPRODUCED IN
ANY FORM WITHOUT THE WRITTEN
PERMISSION OF HIGHLAND TANK®.
HIGHLAND TANK® SHALL BE RESPONSIBLE
ONLY FOR ITEMS INDICATED ON THIS
FABRICATION DRAWING UNLESS OTHERWISE
NOTED. CUSTOMER IS RESPONSIBLE FOR
VERIFYING CORRECTIESS OF SIZE AND
LOCATION OF FITTINGS, ACCESSORIES, AND
COATINGS SHOWN ON THIS DRAWING.



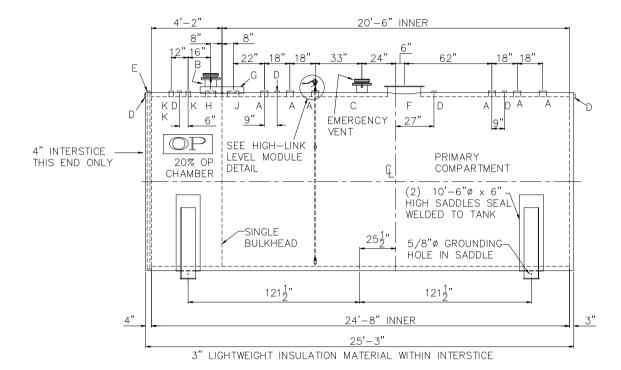

DESIGN DATA CAPACITY: 12.000 GALLONS TYPE: FIREGUARD® CYLINDRICAL FIREGUARD® IS A TRADEMARK OF THE STEEL TANK INSTITUTE NO. REQ. - -OPERATING PRESSURE - ATMOSPHERIC SPECIFIC GRAVITY = 1.0 TANK MATERIAL - MILD CARBON STEEL THICKNESS - INNER - HEADS: 5/16", SHELL: 1/4' THICKNESS - OUTER - HEADS: 5/16", SHELL: 1/4" MIN. GAUGE OR THICKNESS (PER U.L. 2085) CONSTRUCTION - INNER - LAP WELD OUTSIDE ONLY CONSTRUCTION — OUTER — LAP WELD OUTSIDE ONLY TANK TEST - PER UL 2085 INT. FINISH - NONE EXT. FINISH - SP-6 BLAST, FINISH PAINT WHITE

LABEL— UL 2085 AND FIREGUARD® PER sti

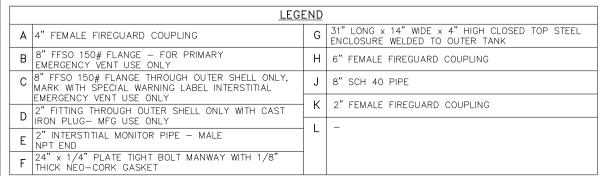

STRIKER PLATES ARE NOT SUPPLIED ON FIREGUARDS® UNLESS SPECIFIED

