


NOTE: ALL RIGHTS RESERVED. THIS DRAWING MUST NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF HIGHLAND TANK® HIGHLAND TANK® HIGHLAND TANK® SHALL BE RESPONSIBLE ONLY FOR ITEMS INDICATED ON THIS FABRICATION DRAWING UNLESS OTHERWISE NOTED. CUSTOMER IS RESPONSIBLE FOR VERIFYING CORRECTIVESS OF SIZE AND LOCATION OF FITTINGS, ACCESSORIES, AND COATINGS SHOWN ON THIS DRAWING.

TOUCH UP OF FINISHED PAINT IS REQUIRED BY INSTALLATION CONTRACTOR. TOUCH UP PAINT SHIPPED WITH TANK. SHIPPING LUGS AS NEEDED



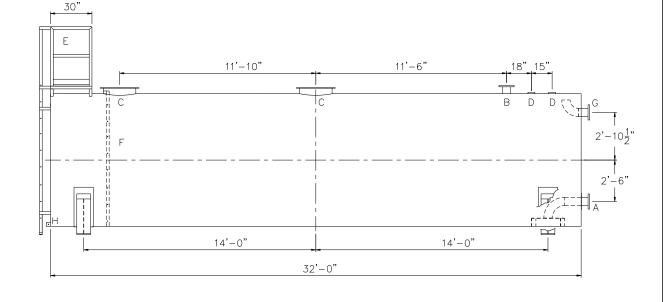



<u>DESIGN DATA</u>	<u>LEGEND</u>
CAPACITY -12,000 GALLONS	A FLANGE WITH INTERNAL VORTEX BREAKER PER
TYPE - FIRE PROTECTION TANK (FPT)	
NO. REQ	B FLANGE - VENT
OPERATING PRESSURE -ATMOSPHERIC	C 24" X 4" PLATE TIGHT BOLT MANWAY WITH 8"
TANK MATERIAL - MILD CARBON STEEL	THICK NEO-CORK GASKET
THICKNESS - HEADS: 5/16"	D 4" FNPT CONNECTION
THICKNESS - SHELL: 1/4"	STD HTM EXTERNAL LADDER & PLATFORM
CONSTRUCTION -LAP WELD INSIDE AND OUTSIDE	E ASSEMBLY — PAINTED SAFETY YELLOW AND SHIPPED LOOSE FOR INSTALLATION ON
TANK TEST -5 PSIG	SITE BY OTHERS
INT. FINISH - SSPC SP10 BLAST, HighDRO®-LINER	F HTM STD INTERNAL LADDER
PLUS FOR NFPA 22 APPLICATIONS EXT. FINISH — SSPC SP6 BLAST, WHITE URETHANE	G FLANGE WITH INTERNAL 90° ELBOW SHOWN - OVERFLOW
PAINT	H FB-3"x 1/4"x3" WITH 5/8"Ø HOLE ON CL
LABEL - NONE	'' (GROUNDING LUG)

