


NOTE: ALL RIGHTS RESERVED. THIS DRAWING MUST NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF HIGHLAND TANKO HIGHLAND TANKO HIGHLAND TANKO SHALL BE RESPONSIBLE ONLY FOR ITEMS INDICATED ON THIS FABRICATION DRAWING UNLESS OTHERWISE NOTED. CUSTOMER IS RESPONSIBLE FOR VERIFYING CORRECTINESS OF SIZE AND LOCATION OF FITTINGS, ACCESSORIES, AND COATINGS SHOWN ON THIS DRAWING.

TOUCH UP OF FINISHED PAINT IS REQUIRED BY INSTALLATION CONTRACTOR. TOUCH UP PAINT SHIPPED WITH TANK.

SHIPPING LUGS AS NEEDED



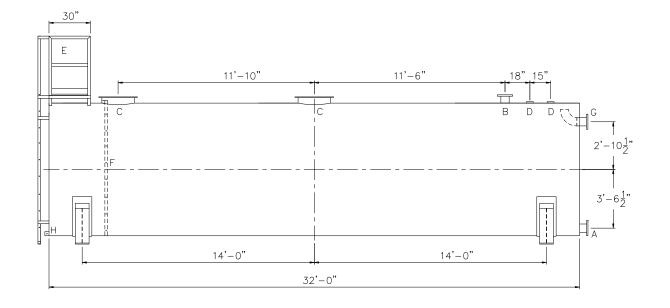



DESIGN DATA_	LEGEND
CAPACITY -12,000 GALLONS	A FLANGE - SUPPLY
TYPE - POTABLE WATER TANK (PWT) NO. REQ	B FLANGE - VENT
OPERATING PRESSURE -ATMOSPHERIC TANK MATERIAL - MILD CARBON STEEL	C 24" X ¼" PLATE TIGHT BOLT MANWAY WITH ½" THICK NEO-CORK GASKET
THICKNESS - HEADS: 5/16" THICKNESS - SHELL: 1/4"	D 4" FNPT CONNECTION
CONSTRUCTION -LAP WELD INSIDE AND OUTSIDE	STD HTM EXTERNAL LADDER & PLATFORM E ASSEMBLY — PAINTED SAFETY YELLOW AND SHIPPED LOOSE FOR INSTALLATION ON SITE BY OTHERS
INT. FINISH — SP10 BLAST HighDRO®—LINER	F HTM STD INTERNAL LADDER
PLUS FOR NSF 61 APPLICATIONS EXT. FINISH —SSPC SP6 BLAST, WHITE URETHANE PAINT	G FLANGE WITH INTERNAL 90° ELBOW SHOWN — OVERFLOW IN FB-3"x 1/4"x3" WITH 5/8"0 HOLE ON CL
LABEL - NONE	H (GROUNDING LUG)

