


NOTE: ALL RIGHTS RESERVED. THIS
DRAWING MUST NOT BE REPRODUCED IN
ANY FORM WITHOUT THE WITTEN
PERMISSION OF HIGHLAND TANK®,
HIGHLAND TANK®, SHALL BE RESPONSIBLE
ONLY FOR ITEMS INDICATED ON THIS
FABRICATION DRAWING UNLESS OTHERWISE
NOTED. CUSTOMER IS RESPONSIBLE FOR
VERIFYING CORRECTINESS OF SIZE AND
LOCATION OF FITTINGS, ACCESSORIES, AND
COATINGS SHOWN ON THIS DRAWING.

TOUCH UP OF FINISHED PAINT IS
REQUIRED BY INSTALLATION
CONTRACTOR. TOUCH UP PAINT SHIPPED
WITH TANK.

SHIPPING LUGS AS NEEDED

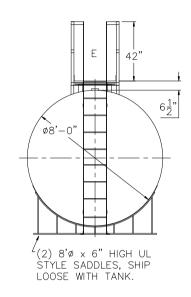

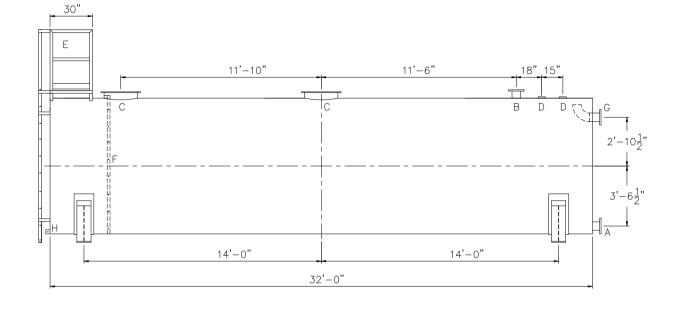



DESIGN DATA	<u>LEGEND</u>
CAPACITY -12,000 GALLONS	A FLANGE - SUPPLY
TYPE - POTABLE WATER TANK (PWT)	D S. WOS NEUT
NO. REQ. — —	B FLANGE - VENT
OPERATING PRESSURE -ATMOSPHERIC	C 24" X 4" PLATE TIGHT BOLT MANWAY WITH 8"
TANK MATERIAL — MILD CARBON STEEL	THICK NEO-CORK GASKET
THICKNESS - HEADS: 5/16"	D 4" FNPT CONNECTION
THICKNESS - SHELL: 1/4"	STD HTM EXTERNAL LADDER & PLATFORM
CONSTRUCTION -LAP WELD INSIDE AND OUTSIDE	E ASSEMBLY — PAINTED SAFETY YELLOW  AND SHIPPED LOOSE FOR INSTALLATION ON
TANK TEST -5 PSIG	SITE BY OTHERS
INT. FINISH - SP10 BLAST HighDRO®-LINER	F HTM STD INTERNAL LADDER
PLUS FOR NSF 61 APPLICATIONS EXT. FINISH —SSPC SP6 BLAST, WHITE URETHANE	G FLANGE WITH INTERNAL 90° ELBOW SHOWN — OVERFLOW
PAINT	H FB-3"x 1/4"x3" WITH 5/8"Ø HOLE ON CL
LABEL - NONE	'' (GROUNDING LUG)

