GENERAL SPECIFICATIONS

NO. REQ'D: (1)

CAPACITY: 15,000 GALLONS
TYPE: HT, HIGHGUARD, SINGLE WALL, "G" SERIES
MATERIAL: MILD CARBON STEEL

FLOW RATE: 1.500 GPM

GAUGE:

SHELL- 1/4" HEADS- 1/4"

SURFACE PREP:

SSPC NO.6 BLAST ALL EXTERIOR SURFACES

COATING: MATERIAL THICKNESS EXTERIOR-HIGHGUARD (75 MILS) INTERIOR-NONE


CONSTRUCTION: LAP FIT AND WELD ALL EXTERIOR SEAMS

OPERATING PRESSURE: ATMOSPHERIC

- 1. POLYURETHANE HIGHGUARD TANK IS NOT APPROVED FOR THE STORAGE OF HEATED PRODUCTS
- 2. ALL VENT PIPING BY INSTALLER
- 3. 15000 VOLT SPARK TEST PROVIDED AT FACTORY

PROVIDED EQUIPMENT

- 150# R.F.S.O. FLANGE W/ 2" NPT FOR VENT
- 2. 7 GA. BULKHEAD
- 3. VELOCITY HEAD DIFFUSION BAFFLE
- 4. WEAR PLATE
- 5. SEDIMENT CHAMBER
- 6. UNDERFLOW BAFFLE
- SLUDGE BAFFLE
- STRIKER PLATES
- 9. PARALLEL CORRUGATED PLATE COALESCER
 10. OIL/WATER SEPARATOR CHAMBER
- 11. SLÚDGE CHAMBER
- 12. OUTLET DOWNCOMER
- 13. 24"Ø MANWAY WITH BOLT-ON EXTENSION SHIPPED LOOSE
- 14. 4"Ø FTG. FOR OIL PUMP-OUT W/ INTERNAL PIPE INSTALLED AND RISER PIPE SHIPPED LOOSE
- 2"Ø FTG. FOR LEVEL SENSOR W/ RISER PIPE SHIPPED LOOSE
- 16. LIFTING LUG
- 17. 2"ø FTG. FOR VENT TYP. BOTH MANWAYS
- 18. 4"ø FTG. FOR GAUGE WITH PLUG TYP. BOTH MANWAYS

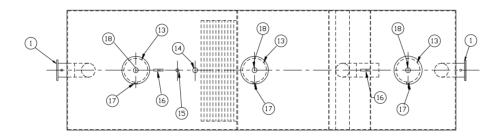

PLAN

