



STRIKER PLATES ROLLED & SEAL WELDED TO THE
TANK, 1/4" X 12" x 12" MIN.

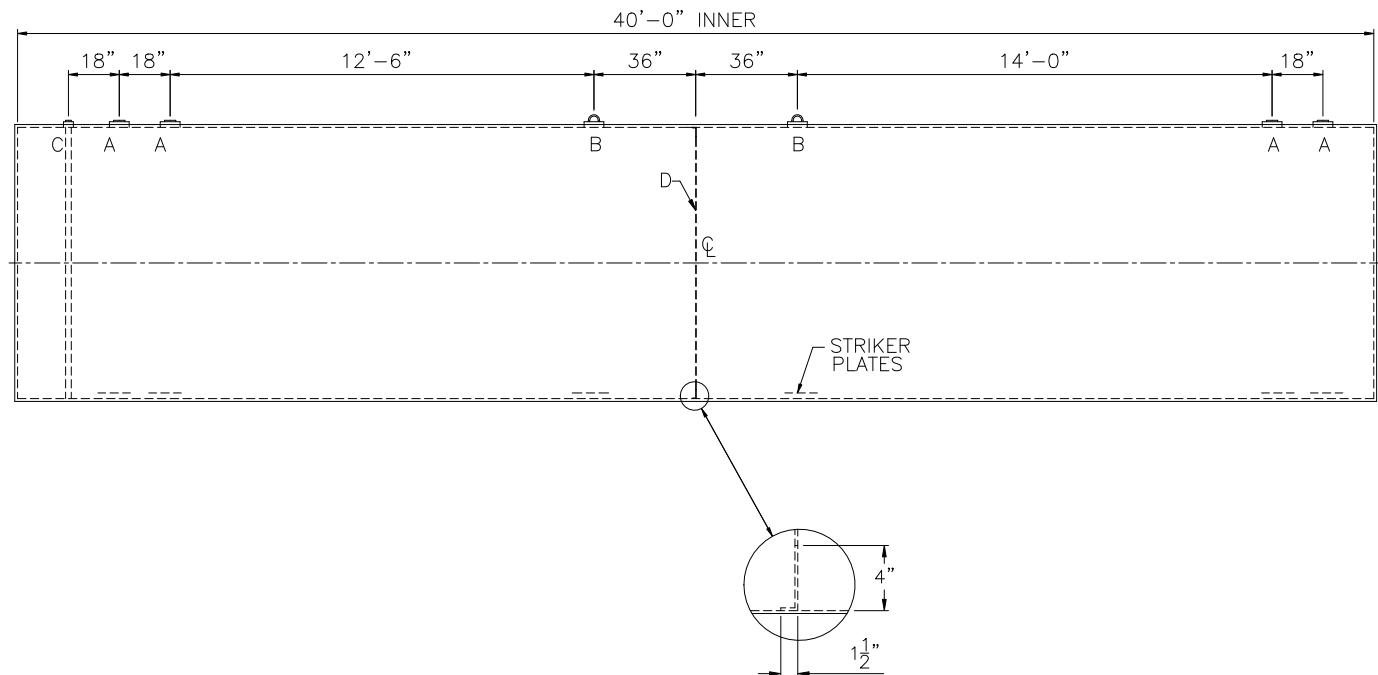

CAPACITY – 15,000 GALLONS
TYPE – DOUBLE WALL – 360° TYPE II
NO. REQ. – –
OPERATING PRESSURE – ATMOSPHERIC
TANK MATERIAL – MILD CARBON STEEL
THICKNESS – HEADS– 1/4”
THICKNESS – SHELL – 1/4”
*GA THK. BASED ON 60” MAX. BURIAL DEPTH
CONSTRUCTION – LAP WELD OUTSIDE ONLY
–
TANK TEST – INNER: 5 PSIG
OUTER: FULL VACUUM
INT. FINISH – NONE
–
EXT. FINISH – GREEN TITAN® WRAP
–
LABEL – UL-58/UL-1746 PART III

A	4" CLOSE OFF FITTING
B	4" CLOSE OFF FITTING WITH REMOVABLE LIFT LUG
C	2" CLOSE OFF FITTING WITH INTERNAL INTERSTICE MONITOR PIPE
D	1/4" x 1-1/2" x 4" STIFFENER
E	—
F	—

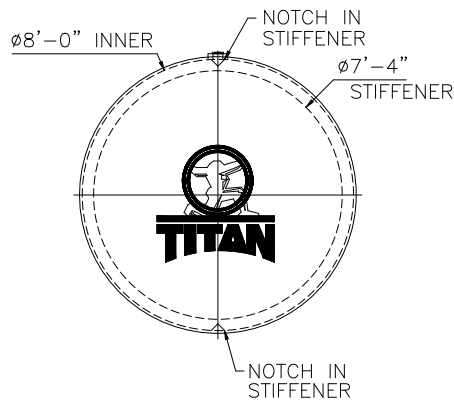