
NOTE: ALL RIGHTS RESERVED. THIS DRAWING MUST NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF HIGHLAND TANK®. HIGHLAND TANK®. SHALL BE RESPONSIBLE ONLY FOR ITEMS INDICATED ON THIS FABRICATION DRAWING UNLESS OTHERWISE NOTED. CUSTOMER IS RESPONSIBLE FOR VERIFYING CORRECTNESS OF SIZE AND LOCATION OF EITHINGS ACCESSORIES AND LOCATION OF FITTINGS, ACCESSORIES, AND COATINGS SHOWN ON THIS DRAWING.


- NOTES:
  1) THE HIGHGUARD TANK IS NOT APPROVED FOR THE STORAGE OF HEATED PRODUCTS.
- 2) 15,000 VOLT SPARK TEST PROVIDED AT FACTORY.


  3) SHOP TO INSTALL 1/4"x12"x12" STRIKER PLATES, ROLLED AND SEAL WELD TO THE TANK.







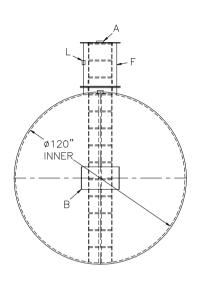

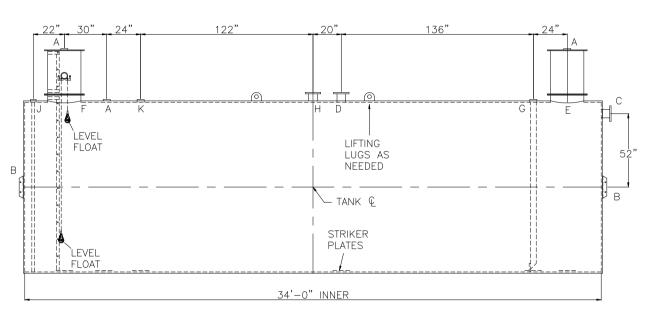

DESIGN DATA  CAPACITY - 20,000 GALLONS				
NO. REQ				
OPERATING PRESSURE - ATMOSPHERIC				
TANK MATERIAL - MILD CARBON STEEL				
THICKNESS INNER - HEADS: 1/4 GA, SHELL: 5/16" THICKNESS OUTER - HEADS: 1/4", SHELL: 10 GA *GA THK. BASED ON 60" MAX. BURIAL DEPTH				
CONSTRUCTION —				
INNER TANK — FLAT FLANGED, HEADS LAP WELD INTERIOR AND EXTERIOR				
OUTER TANK — LAP WELD OUTSIDE ONLY  TANK TEST — INNER — 5 PSIG  OUTER — 2 PSIG AND FULL VACUUM				
EXT. FINISH - SP6 BLAST, 75 MILS POLYURETHANE				
LABEL - HIGHGUARD				

_	<u>LEGEND</u>				
	Α	4" FITTING	G	4" FITTING WITH 4" SCH 40 DROP PIPE	
$\dashv$	В	HTM SPIN BRK'T — MFG USE ONLY — NOT TO BE USED FOR FIELD INSTALLATION	Н	FLANGE - SECONDARY VENT	
	С	FLANGE - LOCATE ON VERTICAL Q - INLET	J	2" INTERNAL MONITOR PIPE	
$\exists$	D	FLANGE — PRIMARY VENT	K	4" FNPT FITTING-SPARE	
	E	24" x ¼" PLATE TIGHT BOLT MANWAY WITH  ½" THICK NEO-CORK GASKET AND BOLT ON EXTENSION - EXTENSION SHIPS LOOSE FOR		o" FULL COURTING (FLEATRICAL COMMENTON)	
		INSTALLATION ON SITE BY OTHERS	L	2" FULL COUPLING (ELECTRICAL CONNECTION)	
	F	24" x ¼" PLATE TIGHT BOLT MANWAY WITH   ½" THICK NEO-CORK GASKET AND BOLT ON  EXTENSION - EXTENSION SHIPS LOOSE FOR  INSTALLATION ON SITE BY OTHERS, ACCESS  LADDER INCLUDED.			

