
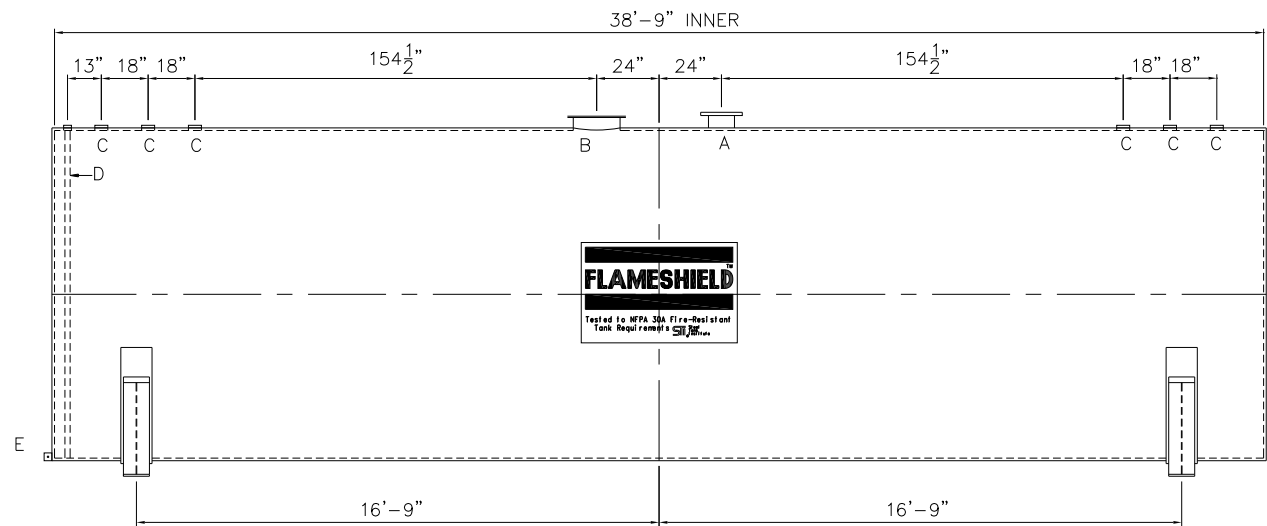


TOUCH UP OF FINISHED PAINT IS
REQUIRED BY INSTALLATION
CONTRACTOR. TOUCH UP PAINT SHIPPED
WITH TANK.

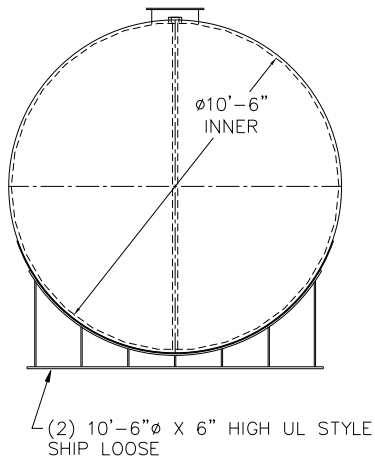

DESIGN DATA

CAPACITY - 25,000 GALLONS

TYPE - DOUBLE WALL - TYPE I

NO.	REQ.	—	—
-----	------	---	---

OPERATING PRESSURE – ATMOSPHERIC

SPECIFIC GRAVITY = 1.0

TANK MATERIAL – MILD CARBON STEEL

THICKNESS - INNER- HEADS: 5/16" SHELL: 1/4"

THICKNESS - OUTER- HEADS: 1/4" SHELL: 7 GA

CONSTRUCTION - INNER - LAP WELD OUTSIDE ONLY
OUTER - LAP WELD OUTSIDE ONLY

TANK TEST - INNER - 5 PSIG OUTER - 2 PSIG AND FULL VACUUM
--

INT. FINISH – NONE


[illegible]

EXT. FINISH – SHOP PRIMER

LABEL - UL 142, FLAMESHIELD PER sti AND swRI
97-04

LEGEND

A	10" RF50 150# FLANGE THROUGH OUTER SHELL ONLY- MARK WITH SPECIAL WARNING LABEL – INTERSTITIAL EMERGENCY VENT USE ONLY
B	18" LOOSE BOLT MANWAY – PRIMARY EMERGENCY VENT USE
C	4" FITTING
D	2" INTERNAL INTERSTITIAL MONITOR PIPE
E	FB-3"x 1/4"x3" WITH 5/8"Ø HOLE ON CL (GROUNDING LUG)
F	–

		<h1>Highland Tank®</h1>	
<p>25,000 GAL 126" Ø FLAMESHIELD</p>			
<p>CUSTOMER:</p>			
<p>PROJECT:</p>			
<p>QUOTE NO:</p>		<p>CHK'D BY:</p>	
<p>SCALE: 1/4"=1'-0"</p>	<p>DATE:</p>	<p>DWG. BY:</p>	<p>DWG. NO:</p>
		<p>25000FS126</p>	