


NOTE: ALL RIGHTS RESERVED. THIS DRAWING MUST NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF HIGHLAND TANK® HIGHLAND TANK® HIGHLAND TANK® SHALL BE RESPONSIBLE ONLY FOR ITEMS INDICATED ON THIS FABRICATION DRAWING UNLESS OTHERWISE NOTED. CUSTOMER IS RESPONSIBLE FOR VERIFYING CORRECTINESS OF SIZE AND LOCATION OF FITTINGS, ACCESSORIES, AND COATINGS SHOWN ON THIS DRAWING.

TOUCH UP OF FINISHED PAINT IS
REQUIRED BY INSTALLATION
CONTRACTOR. TOUCH UP PAINT SHIPPED
WITH TANK.



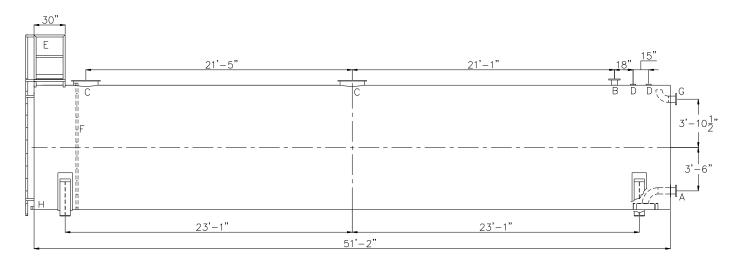



DESIGN DATA	<u>LEGEND</u>
CAPACITY -30,000 GALLONS	A FLANGE WITH INTERNAL VORTEX BREAKER PER NEPA 22
TYPE - FIRE PROTECTION TANK (FPT) NO. REQ	B FLANGE - VENT
OPERATING PRESSURE -ATMOSPHERIC TANK MATERIAL - MILD CARBON STEEL	C 24" X 4" PLATE TIGHT BOLT MANWAY WITH 8" THICK NEO-CORK GASKET
THICKNESS: HEADS - 5/16" THICKNESS: SHELL - 1/4"	D 4" FNPT CONNECTION
CONSTRUCTION -LAP WELD INSIDE & OUTSIDE	E ASSEMBLY - PAINTED SAFETY YELLOW AND SHIPPED LOOSE FOR INSTALLATION ON
TANK TEST -5 PSIG NT. FINISH - SSPC SP10 BLAST, HighDRO®-LINER PLUS FOR NEPA 22 APPLICATIONS	SITE BY OTHERS F HTM STD INTERNAL LADDER
EXT. FINISH -SSPC SP6 BLAST, WHITE URETHANE PAINT	G FLANGE WITH INTERNAL 90° ELBOW SHOWN - OVERFLOW
LABEL - NONE	H FB-3"x 1/4"x3" WITH 5/8"Ø HOLE ON CL (GROUNDING LUG)

