

NOTE: ALL RIGHTS RESERVED. THIS
DRAWING MUST NOT BE REPRODUCED IN
ANY FORM WITHOUT THE WRITEN
PERMISSION OF HIGHLAND TANK®,
HIGHLAND TANK®, SHALL BE RESPONSIBLE
ONLY FOR ITEMS INDICATED ON THIS
FABRICATION DRAWING UNLESS OTHERWISE
NOTED. CUSTOMER IS RESPONSIBLE FOR
VERIFYING CORRECTINESS OF SIZE AND
LOCATION OF FITTINGS, ACCESSORIES, AND
COATINGS SHOWN ON THIS DRAWING.

TOUCH UP OF FINISHED PAINT IS REQUIRED BY INSTALLATION CONTRACTOR. TOUCH UP PAINT SHIPPED WITH TANK. SHIPPING LUGS AS NEEDED





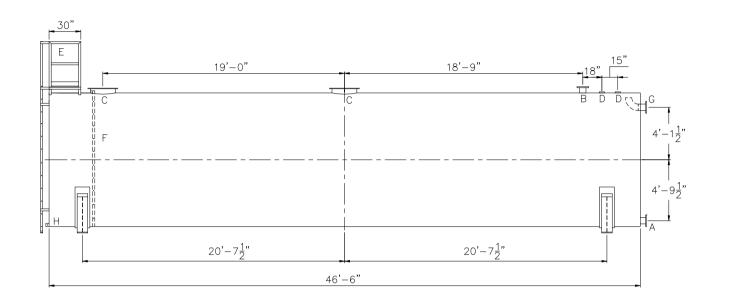

<u>DESIGN DATA</u>	
CAPACITY -30,000 GALLONS	
TYPE - POTABLE WATER TANK (PWT)	L
NO. REQ	
OPERATING PRESSURE -ATMOSPHERIC	
TANK MATERIAL - MILD CARBON STEEL	L
THICKNESS: HEADS — 5/16" THICKNESS: SHELL — 1/4"	
ITHORNESS. SHELE - 1/ +	
CONSTRUCTION -LAP WELD INSIDE & OUTSIDE	
TANK TEST -5 PSIG	L
INT. FINISH — SP10 BLAST HighDRO ® —LINER PLUS FOR NSF 61 APPLICATIONS	
EXT. FINISH —SSPC SP6 BLAST, WHITE URETHANE PAINT	
LABEL - NONE	

	<u>LEGEND</u>		
Α	FLANGE - SUPPLY		
В	FLANGE - VENT		
С	24" X 4" PLATE TIGHT BOLT MANWAY WITH 8" THICK NEO-CORK GASKET		
D	4" FNPT CONNECTION		
Е	STD HTM EXTERNAL LADDER & PLATFORM ASSEMBLY — PAINTED SAFETY YELLOW AND SHIPPED LOOSE FOR INSTALLATION ON SITE BY OTHERS		
F	HTM STD INTERNAL LADDER		
G	FLANGE WITH INTERNAL 90° ELBOW SHOWN — OVERFLOW		
Н	FB-3"x 1/4"x3" WITH 5/8"Ø HOLE ON CL (GROUNDING LUG)		

