

NOTE: ALL RIGHTS RESERVED. THIS DRAWING MUST NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF HIGHLAND TANKE, HIGHLAND TANKE, ONLY FOR TEMS MIDICATED ON THIS FABRICATION DRAWING DULESS OTHERWISE NOTED. CUSTOMER IS RESPONSIBLE FOR VERTYING CORRECTINGS OF SIZE AND COATINGS SHOWN ON THIS DRAWING.

TOUCH UP OF FINISHED PAINT IS REQUIRED BY INSTALLATION CONTRACTOR. TOUCH UP PAINT SHIPPED WITH TANK. SHIPPING LUGS AS NEEDED



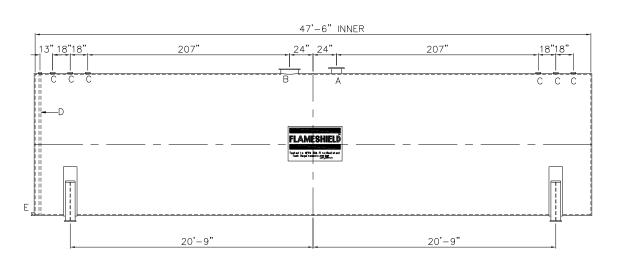

<u>DESIGN_DATA</u>		
CAPACITY - 40,000 GALLONS		
TYPE - DOUBLE WALL - TYPE I		
NO. REQ		
OPERATING PRESSURE - ATMOSPHERIC		
SPECIFIC GRAVITY = 1.0		
TANK MATERIAL - MILD CARBON STEEL		10" RFSO 150#
THICKNESS - INNER- HEADS: 3/8" SHELL: 3/8" THICKNESS - OUTER- HEADS: 1/4" SHELL: 1/4"	A	MARK WITH SP EMERGENCY VE
CONSTRUCTION - INNER - LAP WELD OUTSIDE ONLY OUTER - LAP WELD OUTSIDE ONLY	В	18" LOOSE BOUSE
TANK TEST - INNER - 5 PSIG OUTER - 2 PSIG AND FULL VACUUM	С	4" FITTING
INT. FINISH — NONE	D	2" INTERNAL II
EXT. FINISH - SHOP PRIMER -	Е	FB-3"x 1/4"x3 (GROUNDING LU
LABEL - UL 142, FLAMESHIELD PER sti AND swRI 97-04	F	-

_		<u>LEGEND</u>
,	А	10" RFSO 150# FLANGE THROUGH OUTER SHELL ONLY— MARK WITH SPECIAL WARNING LABEL — INTERSTITIAL EMERGENCY VENT USE ONLY
Y _Y	В	18" LOOSE BOLT MANWAY - PRIMARY EMERGENCY VENT USE
	С	4" FITTING
	D	2" INTERNAL INTERSTITIAL MONITOR PIPE
	Ε	FB-3"x 1/4"x3" WITH 5/8"Ø HOLE ON CL (GROUNDING LUG)
	F	

