


NOTE: ALL RIGHTS RESERVED. THIS DRAWING MUST NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF HIGHLAND TANK®. HIGHLAND TANK® SHALL BE RESPONSIBLE ONLY FOR ITEMS INDICATED ON THIS FABRICATION DRAWING UNLESS OTHERWISE NOTED. CUSTOMER IS RESPONSIBLE FOR VERIFYING CORRECTIVESS OF SIZE AND LOCATION OF FITTINGS, ACCESSORIES, AND COATINGS SHOWN ON THIS DRAWING.

TOUCH UP OF FINISHED PAINT IS REQUIRED BY INSTALLATION CONTRACTOR. TOUCH UP PAINT SHIPPED WITH TANK.

SHIPPING LUGS AS NEEDED





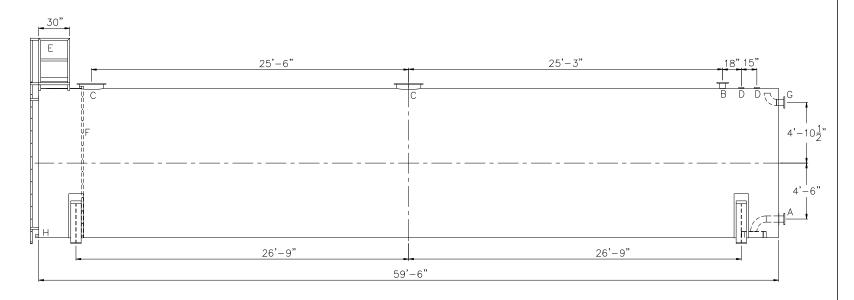

DESIGN DATA_		
CAPACITY -50,000 GALLONS TYPE - FIRE PROTECTION TANK (FPT)	Α	FLANGE VORTEX
NO. REQ. –	В	FLANGE
OPERATING PRESSURE — ATMOSPHERIC TANK MATERIAL — MILD CARBON STEEL	С	24" X THICK
THICKNESS: HEADS - 3/8" THICKNESS: SHELL - 3/8"	D	4" FNP
CONSTRUCTION -LAP WELD INSIDE & OUTSIDE TANK TEST -5 PSIG	E	STD HT ASSEME AND SH SITE BY
INT. FINISH — SSPC SP10 BLAST, HighDRO®—LINER PLUS FOR NFPA 22 APPLICATIONS	F	HTM ST
EXT. FINISH - SSPC SP6 BLAST, WHITE URETHANE PAINT	G	FLANGE SHOWN
LABEL - NONE	Н	FB-3"x (GROUN

_		
		<u>LEGEND</u>
	Α	FLANGE WITH INTERNAL VORTEX BREAKER PER NFPA 22
	_	FLANGE - VENT
	С	24" X 4" PLATE TIGHT BOLT MANWAY WITH 8" THICK NEO-CORK GASKET
	D	4" FNPT CONNECTION
	E	STD HTM EXTERNAL LADDER & PLATFORM ASSEMBLY — PAINTED SAFETY YELLOW AND SHIPPED LOOSE FOR INSTALLATION ON SITE BY OTHERS
	F	HTM STD INTERNAL LADDER
	G	FLANGE WITH INTERNAL 90° ELBOW SHOWN — OVERFLOW
	Н	FB-3"x 1/4"x3" WITH 5/8"Ø HOLE ON CL (GROUNDING LUG)

