



TOUCH UP OF FINISHED PAINT IS REQUIRED BY INSTALLATION CONTRACTOR. TOUCH UP PAINT SHIPPED WITH TANK. SHIPPING LUGS AS NEEDED



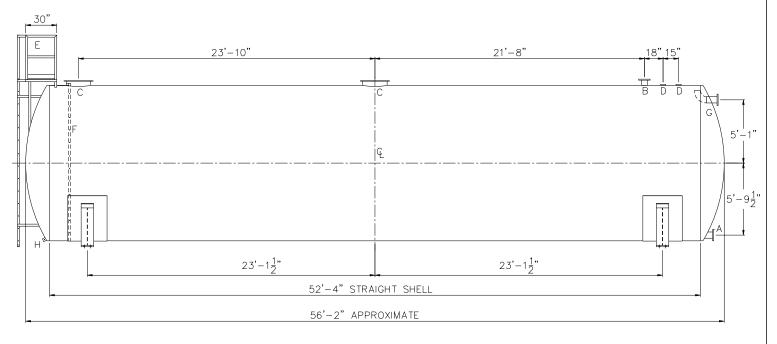

DESIGN DATA_		
CAPACITY -50,000 GALLONS	Α	FLANG
TYPE — POTABLE WATER TANK (PWT)		
NO. REQ. –	В	FLANC
OPERATING PRESSURE -ATMOSPHERIC	_	24" >
TANK MATERIAL - MILD CARBON STEEL	С	THICK
THICKNESS: HEADS - 3/8" FLANGED & DISHED	D	4" FN
THICKNESS: SHELL - 3/8"		STD H
CONSTRUCTION -LAP WELD INSIDE & OUTSIDE	F	ASSEN
TANK TEST -5 PSIG	-	AND S
INT. FINISH — SP10 BLAST HighDRO®-LINER	F	нтм ѕ
PLUS FOR NSF 61 APPLICATIONS	F	IT IIVI S
EXT. FINISH -SSPC SP6 BLAST, WHITE URETHANE	G	FLANG
PAINT		SHOW
LABEL - NONE	Н	FB-3' (GROU

11'-3"

		LECENID	
	LEGEND		
	Α	FLANGE - SUPPLY	
	В	FLANGE - VENT	
	С	24" X ¼" PLATE TIGHT BOLT MANWAY WITH \{ \}" THICK NEO-CORK GASKET	
	D	4" FNPT CONNECTION	
	Ε	STD HTM EXTERNAL LADDER & PLATFORM ASSEMBLY — PAINTED SAFETY YELLOW AND SHIPPED LOOSE FOR INSTALLATION ON SITE BY OTHERS	
	F	HTM STD INTERNAL LADDER	
ΝE	G	FLANGE WITH INTERNAL 90° ELBOW SHOWN — OVERFLOW	
	Н	FB-3"x 1/4"x3" WITH 5/8"Ø HOLE ON CL (GROUNDING LUG)	

