



SHIPPING LUGS AS NEEDED



r1-1/8"ø HOLES (4 REQ'D)

11'-3"

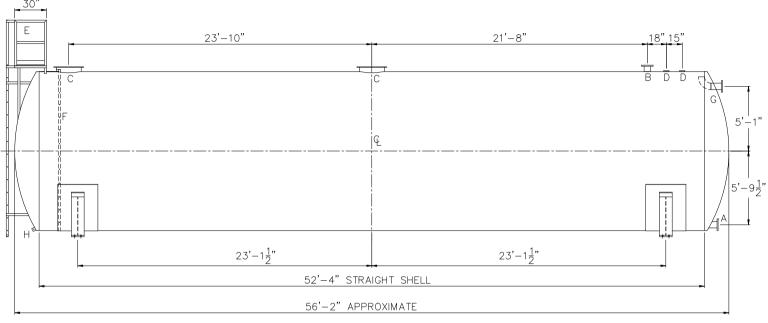

	_
DESIGN DATA	
CAPACITY -50,000 GALLONS	ſ
TYPE - POTABLE WATER TANK (PWT)	ŀ
NO. REQ. —	
OPERATING PRESSURE -ATMOSPHERIC	ŀ
TANK MATERIAL — MILD CARBON STEEL	L
THICKNESS: HEADS - 3/8" FLANGED & DISHED THICKNESS: SHELL - 3/8"	
CONSTRUCTION -LAP WELD INSIDE & OUTSIDE	
TANK TEST -5 PSIG	L
INT. FINISH — SP10 BLAST HighDRO ® —LINER PLUS FOR NSF 61 APPLICATIONS	-
EXT. FINISH —SSPC SP6 BLAST, WHITE URETHANE PAINT	L

LABEL - NONE

	<u>LEGEND</u>
Α	FLANGE — SUPPLY
_	FLANGE - VENT
С	24" X 4" PLATE TIGHT BOLT MANWAY WITH 8" THICK NEO-CORK GASKET
D	4" FNPT CONNECTION
Е	STD HTM EXTERNAL LADDER & PLATFORM ASSEMBLY — PAINTED SAFETY YELLOW AND SHIPPED LOOSE FOR INSTALLATION ON SITE BY OTHERS
F	HTM STD INTERNAL LADDER
G	FLANGE WITH INTERNAL 90° ELBOW SHOWN — OVERFLOW
Н	FB-3"x 1/4"x3" WITH 5/8"Ø HOLE ON CL (GROUNDING LUG)

