


TOUCH UP OF FINISHED PAINT IS REQUIRED BY INSTALLATION CONTRACTOR. TOUCH UP PAINT SHIPPED WITH TANK.

SHIPPING LUGS AS NEEDED

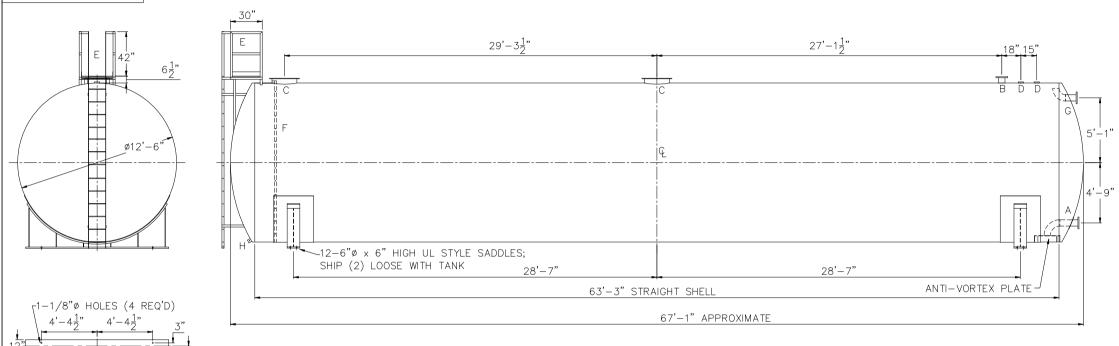

<u>DESIGN DATA</u>		
CAPACITY -60,000 GALLONS	Α	FL
TYPE - FIRE PROTECTION TANK (FPT)		PE
NO. REQ. –	В	FL
OPERATING PRESSURE -ATMOSPHERIC		24
TANK MATERIAL — MILD CARBON STEEL	С	TH
THICKNESS: HEADS - 3/8" FLANGED & DISHED	D	4"
THICKNESS: SHELL - 3/8"		ST
CONSTRUCTION -LAP WELD INSIDE & OUTSIDE	E	AS AN SI
TANK TEST -5 PSIG		Si.
INT. FINISH — SSPC SP10 BLAST, HighDRO®—LINER PLUS FOR NFPA 22 APPLICATIONS	F	НТ
EXT. FINISH -SSPC SP6 BLAST, WHITE URETHANE	G	FL.
PAINT	SH	
LABEL – NONE	Н	FB (G
ILADEL - INVINE	1	11(5

11'-3"

	LEGEND
Α	FLANGE WITH INTERNAL ANTI-VORTEX PLATE PER NFPA 22
В	FLANGE - VENT
С	24" X 2" PLATE TIGHT BOLT MANWAY WITH 2" THICK NEO-CORK GASKET
D	4" FNPT CONNECTION
Е	STD HTM EXTERNAL LADDER & PLATFORM ASSEMBLY — PAINTED SAFETY YELLOW AND SHIPPED LOOSE FOR INSTALLATION ON SITE BY OTHERS
F	HTM STD INTERNAL LADDER
G	FLANGE WITH INTERNAL 90° ELBOW SHOWN — OVERFLOW
Н	FB-3"x 1/4"x3" WITH 5/8"Ø HOLE ON CL (GROUNDING LUG)

