


NOTE: ALL RIGHTS RESERVED. THIS DRAWING MUST NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF HIGHLAND TANKE HIGHLAND TANKE SHALL BE RESPONSIBLE ONLY FOR ITEMS INDICATED ON THIS FABRICATION DRAWING GUNLESS OTHERWISE NOTED. CUSTOMER IS RESPONSIBLE FOR VERIFYING CORRECTINGS OF SIZE AND LOCATION OF FITTINGS, ACCESSORIES, AND COATINGS SHOWN ON THIS DRAWING.

TOUCH UP OF FINISHED PAINT IS REQUIRED BY INSTALLATION CONTRACTOR. TOUCH UP PAINT SHIPPED WITH TANK.

SHIPPING LUGS AS NEEDED

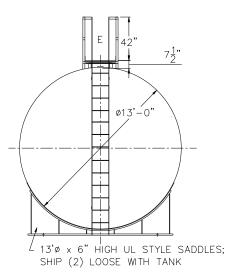



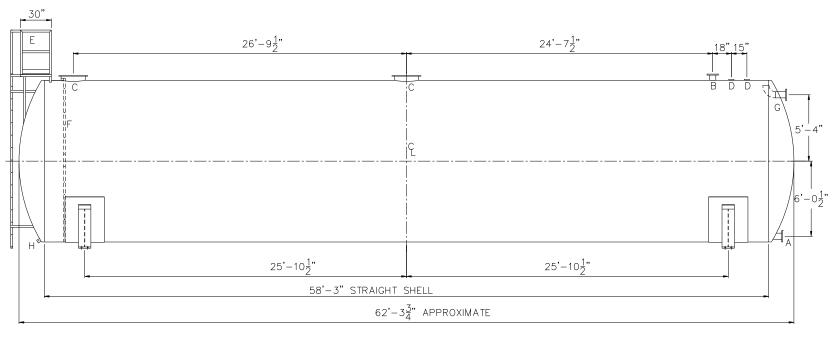

DESIGN DATA_	<u>LEGEND</u>
CAPACITY -60,000 GALLONS TYPE - POTABLE WATER TANK (PWT)	A FLANGE - SUPPLY
NO. REQ. –	B FLANGE - VENT
OPERATING PRESSURE — ATMOSPHERIC TANK MATERIAL — MILD CARBON STEEL	C 24" X 1 PLATE TIGHT BOLT MANWAY WITH 1 THICK NEO-CORK GASKET
THICKNESS: HEADS — 3/8" FLANGED & DISHED THICKNESS: SHELL — 3/8"	D 4" FNPT CONNECTION
CONSTRUCTION -LAP WELD INSIDE & OUTSIDE TANK TEST -5 PSIG	STD HTM EXTERNAL LADDER & PLATFORM E ASSEMBLY — PAINTED SAFETY YELLOW AND SHIPPED LOOSE FOR INSTALLATION ON SITE BY OTHERS
NT. FINISH — SP10 BLAST HighDRO®—LINER PLUS FOR NSF 61 APPLICATIONS	F HTM STD INTERNAL LADDER
EXT. FINISH - SSPC SP6 BLAST, WHITE URETHANE PAINT	G FLANGE WITH INTERNAL 90° ELBOW
LABEL - NONE	H FB-3"x 1/4"x3" WITH 5/8"Ø HOLE ON CL (GROUNDING LUG)

