



asme pressure vessels

asme fire protection vessels

HT-1122

PRODUCT DETAILS


Fire Protection Tanks (FPT) are hydropneumatic water storage tanks specifically designed for use in private fire protection systems.

These ASME pressure vessels are required by fire codes in many commercial, industrial and institutional buildings for use with automatic sprinkler systems for fire suppression. FPT are designed, fabricated, tested, inspected and installed in accordance with the National Fire Protection Association NFPA Standard No. 22, "Water Tanks for Private Fire Protection."

During normal operation, this ASME pressure vessel is filled with water to 2/3 the volume of the tank and then pressurized with air to 125 psi. FPT can be located underground with all of the fittings located on one head that protrudes into the basement or a vault.

The outlet flange is located at the bottom of the vessel near this head and projects a minimum of 4" into the vessel. A water-stop with link-seal prevents water intrusion. FPT are fully compliant with factory-applied internal and external coatings with optional cathodic protection system on the buried end of the vessel.

*Premium ASME Pressure Vessels
from the Industry Leader*

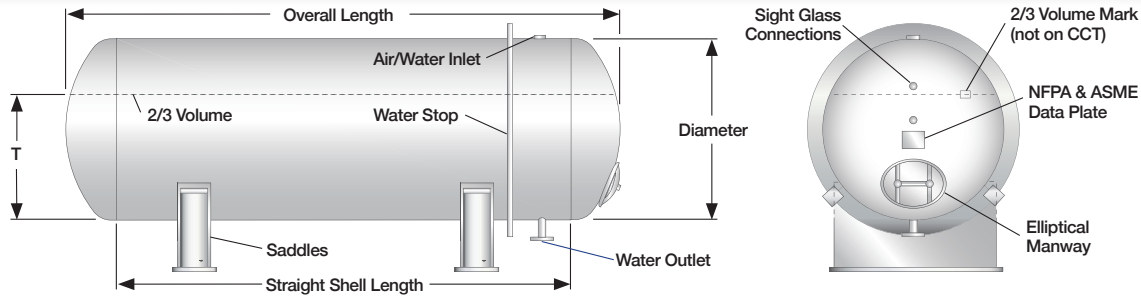

Volume 100% - 2/3 Gallons		Dimensions Straight Shell		Depth of ASME Head	Overall	T
		Diameter	Length	Inches	Length	Dimension @2/3Volume
300 - 200	3'-0"	5'-0"	10.5	6'-9"	22"	
500 - 330	3'-6"	6'-0"	12.0	8'-0"	26"	
1,000 - 667	4'-0"	10'-0"	13.5	12'-3"	29"	
1,500 - 1,000	4'-0"	15'-6"	13.5	17'-9"	29"	
2,000 - 1,320	4'-0"	21'-0"	13.5	23'-3"	29"	
2,000 - 1,320	4'-6"	16'-0"	15.0	18'-6"	33"	
3,000 - 2,000	4'-0"	32'-0"	13.5	34'-3"	29"	
3,000 - 2,000	4'-6"	24'-6"	15.0	27'-0"	33"	
3,000 - 2,000	5'-0"	20'-0"	16.5	22'-9"	36"	
4,000 - 2,640	5'-0"	28'-0"	16.5	30'-9"	35"	
4,000 - 2,640	6'-0"	18'-0"	19.5	21'-3"	44"	
5,000 - 3,300	6'-0"	24'-0"	19.5	27'-3"	42"	
5,000 - 3,300	7'-0"	16'-0"	22.5	19'-9"	51"	
6,000 - 4,000	6'-0"	28'-0"	19.5	31'-3"	44"	
6,000 - 4,000	7'-0"	20'-0"	22.5	23'-9"	51"	
7,000 - 4,620	7'-0"	24'-0"	22.5	27'-9"	50"	
7,500 - 5,000	7'-0"	25'-0"	22.5	28'-9"	52"	
7,500 - 5,000	8'-0"	18'-6"	25.5	22'-9"	59"	
8,000 - 5,280	7'-0"	27'-0"	22.5	30'-9"	51"	
8,000 - 5,280	8'-0"	20'-0"	25.5	24'-3"	58"	
9,000 - 6,000	7'-0"	30'-0"	22.5	33'-9"	52"	
9,000 - 6,000	8'-0"	22'-2"	25.5	26'-5"	60"	
10,000 - 6,600	8'-0"	25'-0"	25.5	29'-3"	59"	
12,000 - 8,000	8'-0"	31'-0"	25.5	35'-3"	59"	
15,000 - 10,000	8'-0"	40'-0"	25.5	44'-3"	58"	
20,000 - 13,200	10'-0"	32'-0"	31.5	37'-3"	74"	
25,000 - 16,500	10'-6"	38'-0"	33.0	43'-6"	75"	
30,000 - 20,000	10'-6"	44'-0"	33.0	49'-6"	79"	

Notes:

1. Tanks are built in accordance with the latest edition of the ASME Unfired Pressure Vessel Code. All ASME vessels are welded, tested and inspected per ASME Code requirements and the stamped name plate.
2. Thicknesses are calculated per ASME Section VIII, Division I - UG 27.
3. Fitting details/locations are typical.
4. 11" X 15" elliptical manway is typical for an inspection opening. All lined vessels require a 12" X 16" minimum elliptical manway.
5. Tanks with different/larger volumes, dimensions and pressures are available upon request.
6. ASME stamped vessels are required in most states. Where applicable, non-code hydropneumatic tanks are available upon request.

All Highland Tank storage tank drawings are available for viewing or downloading in PDF or AutoCAD DXF format at highlandtank.com



Highland Tank

Stoystown, PA
One Highland Road
Stoystown, PA 15563-0338
814.893.5701

Manheim, PA
4535 Elizabethtown Road
Manheim, PA 17545-9410
717.664.0600

Watervliet, NY
958 19th Street
Watervliet, NY 12189-1752
518.273.0801

Greensboro, NC
2700 Patterson Street
Greensboro, NC 27407-2317
336.218.0801

Lebanon, PA
2225 Chestnut Street
Lebanon, PA 17042-2504
717.664.0602

Friedens, PA
1510 Stoystown Road
Friedens, PA 15541-7402
814.443.6800

Clarkston, MI
4701 White Lake Road
Clarkston, MI 48346-2554
248.625.8700

Mancelona, MI
9517 Lake Street
Mancelona, MI 49659-7968
231.587.8412



PROUDLY MADE IN AMERICA