



storage tanks



act-100-u protected underground storage tanks

HT-1047

PRODUCT DETAILS

ACT-100-U[®] polyurethane coating technology meets or surpasses all current UL standards. The ACT-100-U[®] is as rugged as the STI-P3[®] tank but does not require cathodic protection with anodes or monitoring.

Performance tests prove that the 70 mil thick ACT-100-U[®] coating is far superior to Fiberglass Reinforced Polyester (FRP) coatings and much more resistant to incidental damage.


ACT-100-U[®] Features

- UL-58 and UL-1746 compliant
- Must pass a 15,000 volt spark test before shipment
- No cathodic protection monitoring required
- Available in single or double-wall
- STI[®] standard 10-year limited warranty
- 30-year limited warranty is available


Tank Isolation with Nylon Bushings - No Cathodic Protection Required

A 70 mil (min) coating is applied to the steel grit-blasted tank surface

UL-Listed Steel Primary Tank 10 gauge to .375" thick



ACT-100-U[®]

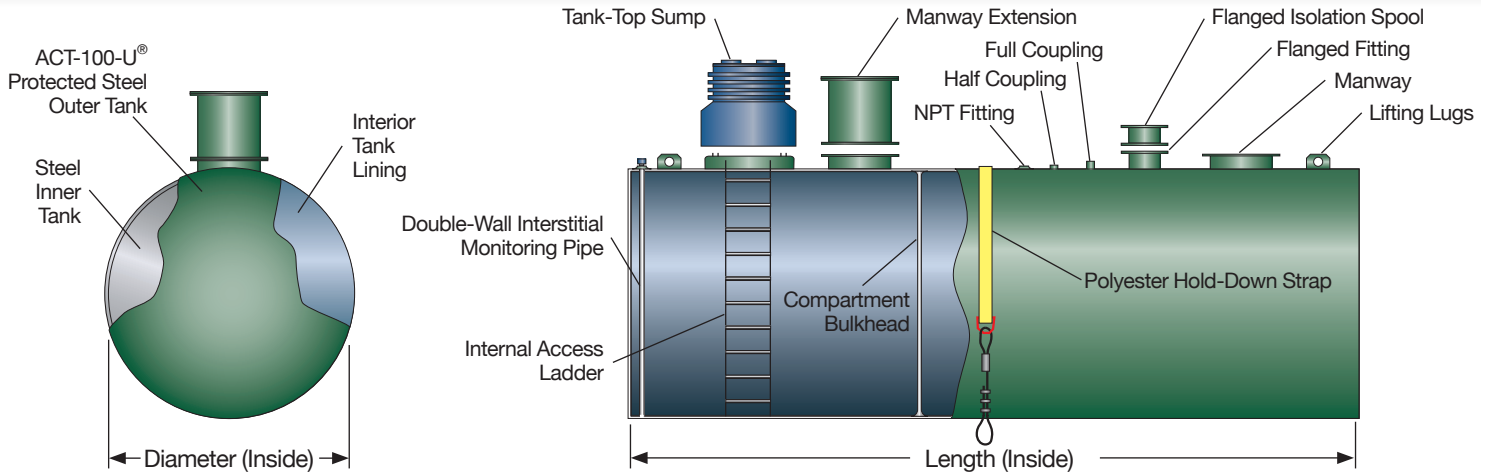

ACT-100-U® Features

- UL-58 and UL-1746 compliant
- Provides 70 mils dielectric polyurethane protection
- Cured films are free of pores
- Must pass a 15,000 volt spark test before shipment
- Strong, flexible and resistant to impact, abrasion and corrosion
- No cathodic protection monitoring required
- STI standard 10-year limited warranty
- Extended 30-year limited warranty is available

Flexible Designs

- Volumes from 240-50,000 gallons
- Custom sizes available
- Multi-product storage compartments

Tank Steel Thickness

Tank thickness is in accordance with UL standards and is based on the Roark formula allowing for 60" of overburden. Please contact Highland if deeper burial depths are required.

Environmentally Friendly

Unlike polyester/fiberglass composite tanks which utilize amines, styrenes and other hazardous materials in production, the ACT-100-U® coating resin uses none of these materials and is environmentally friendly.

The polyurethane coating, in its cured state, is not an environmentally regulated material and can be disposed of as non-hazardous material, complimenting your environmental programs.

Volume Gallons	Tank Dimensions	
	Diameter	Length
240	3'-2"	4'-0"
300	3'-2"	5'-0"
500	4'-0"	5'-5"
1,000	4'-0"	10'-9"
1,000	5'-4"	6'-0"
1,500	5'-4"	9'-0"
2,000	5'-4"	12'-0"
2,500	5'-4"	15'-0"
3,000	5'-4"	18'-0"
4,000	5'-4"	24'-0"
4,000	6'-0"	19'-0"
4,000	8'-0"	10'-8"
5,000	6'-0"	23'-10"
5,000	8'-0"	13'-4"
6,000	6'-0"	28'-8"
6,000	8'-0"	16'-0"
8,000	10'-0"	14'-0"
8,000	8'-0"	21'-4"
10,000	10'-0"	17'-0"
10,000	8'-0"	26'-8"
12,000	10'-0"	20'-6"
12,000	8'-0"	32'-0"
15,000	10'-0"	25'-6"
15,000	8'-0"	40'-0"
20,000	10'-0"	34'-0"
20,000	10'-6"	31'-0"
25,000	10'-0"	42'-6"
25,000	10'-6"	38'-9"
30,000	10'-0"	51'-2"
30,000	10'-6"	46'-6"
40,000	12'-0"	47'-6"
50,000	12'-0"	59'-6"



Highland Tank®

Stoystown, PA
One Highland Road
Stoystown, PA 15563-0338
814.893.5701

Manheim, PA
4535 Elizabethtown Road
Manheim, PA 17545-9410
717.664.0600

Watervliet, NY
958 19th Street
Watervliet, NY 12189-1752
518.273.0801

Greensboro, NC
2700 Patterson Street
Greensboro, NC 27407-2317
336.218.0801

Lebanon, PA
2225 Chestnut Street
Lebanon, PA 17042-2504
717.664.0602

Friedens, PA
1510 Stoystown Road
Friedens, PA 15541-7402
814.443.6800

Clarkston, MI
4701 White Lake Road
Clarkston, MI 48346-2554
248.625.8700

Mancelona, MI
9517 Lake Street
Mancelona, MI 49659-7968
231.587.8412



PROUDLY MADE IN AMERICA