



storage tanks

overfill protection tank

HT-1009

## PRODUCT DETAILS

The OP Tank is equipped with a patented overfill protection system and integral overfill chamber designed to capture and store overfills resulting from mistakes or failures during filling operations. Unlike other forms of secondary containment, the OP keeps the product in the storage tank where it can be easily recovered and used.


The entire OP Tank system is UL-listed for flammable and combustible liquid storage, and does not need to be cleaned or freed from vapors after pump-out.

### Overfill Protection From:

- ª Malfunctioning overfill limiter
- ª Unattended delivery truck
- ª Malfunctioning vents
- ª Distracted delivery attendant
- ª Malfunctioning gauge
- ª Incorrect inventory record
- ª Malfunctioning alarm



### OP Tank Features

In the unlikely event of an overfill, the Overfill Protector chute directs spills into the containment chamber which is sized to contain a spill equal to at least 20% of the tank's storage volume. The collected product can be pumped back to the primary tank, or to another storage tank, through the pump-out fitting in the top of the tank.

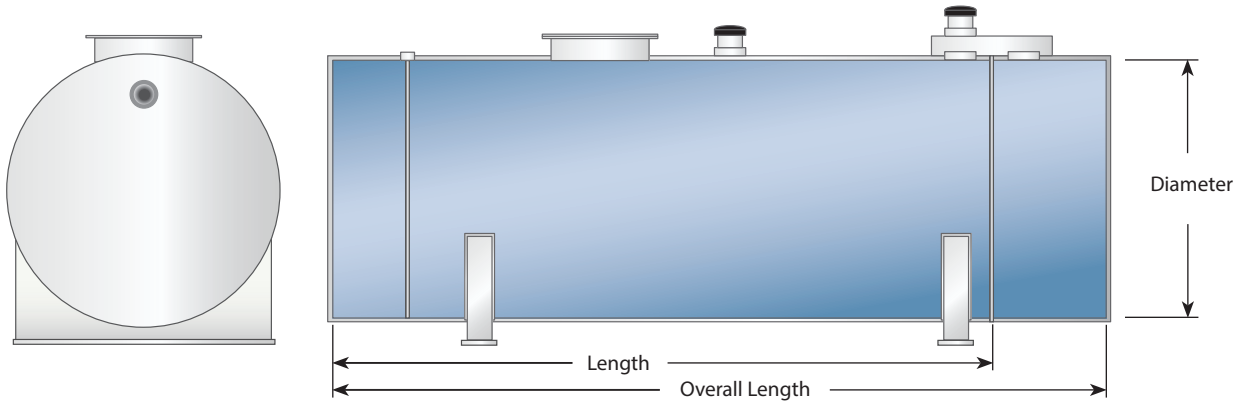

Volume Gallons	Nominal Inside Dimensions		Chamber Volume Gallons	Overall Tank Length
	Diameter	Length		
500	4'-0"	5'-5"	156	7'-1"
1,000	4'-0"	10'-9"	203	12'-11"
1,000	5'-4"	6'-0"	306	7'-10"
1,500	5'-4"	9'-0"	306	10'-10"
2,000	5'-4"	12'-0"	403	14'-5"
2,500	5'-4"	15'-0"	501	18'-0"
3,000	5'-4"	18'-0"	612	21'-8"
4,000	5'-4"	24'-0"	807	28'-10"
4,000	6'-0"	19'-0"	810	22'-10"
4,000	8'-0"	10'-8"	814	12'-10"
5,000	6'-0"	23'-10"	1,022	28'-8"
5,000	8'-0"	13'-4"	1,002	16'-0"
6,000	6'-0"	28'-8"	1,216	34'-5"
6,000	8'-0"	16'-0"	1,222	19'-3"
8,000	8'-0"	21'-4"	1,629	25'-8"
8,000	10'-0"	14'-0"	1,664	16'-10"
10,000	8'-0"	26'-8"	2,005	32'-0"
10,000	10'-0"	17'-0"	2,007	20'-5"
12,000	8'-0"	32'-0"	2,412	38'-5"
12,000	10'-0"	20'-6"	2,447	24'-8"
15,000	8'-0"	40'-0"	3,008	48'-0"
15,000	10'-0"	25'-6"	3,035	30'-8"
20,000	10'-0"	34'-0"	4,014	40'-10"
20,000	10'-6"	31'-0"	4,048	37'-3"
25,000	10'-6"	42'-7"	5,019	46'-6"
30,000	10'-6"	46'-6"	6,045	55'-10"
30,000	12'-0"	35'-6"	6,063	42'-8"
40,000	12'-0"	47'-6"	8,037	57'-0"
50,000	12'-0"	59'-6"	10,081	71'-5"

# how it works

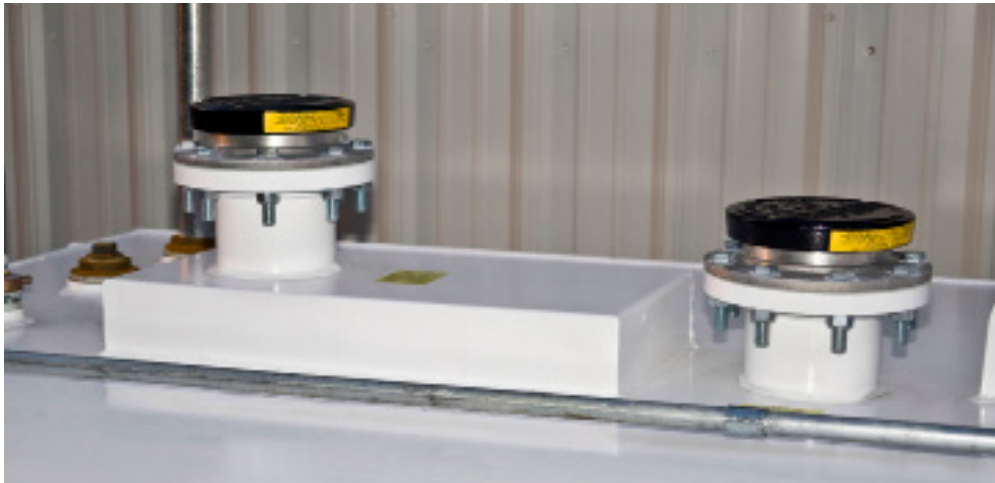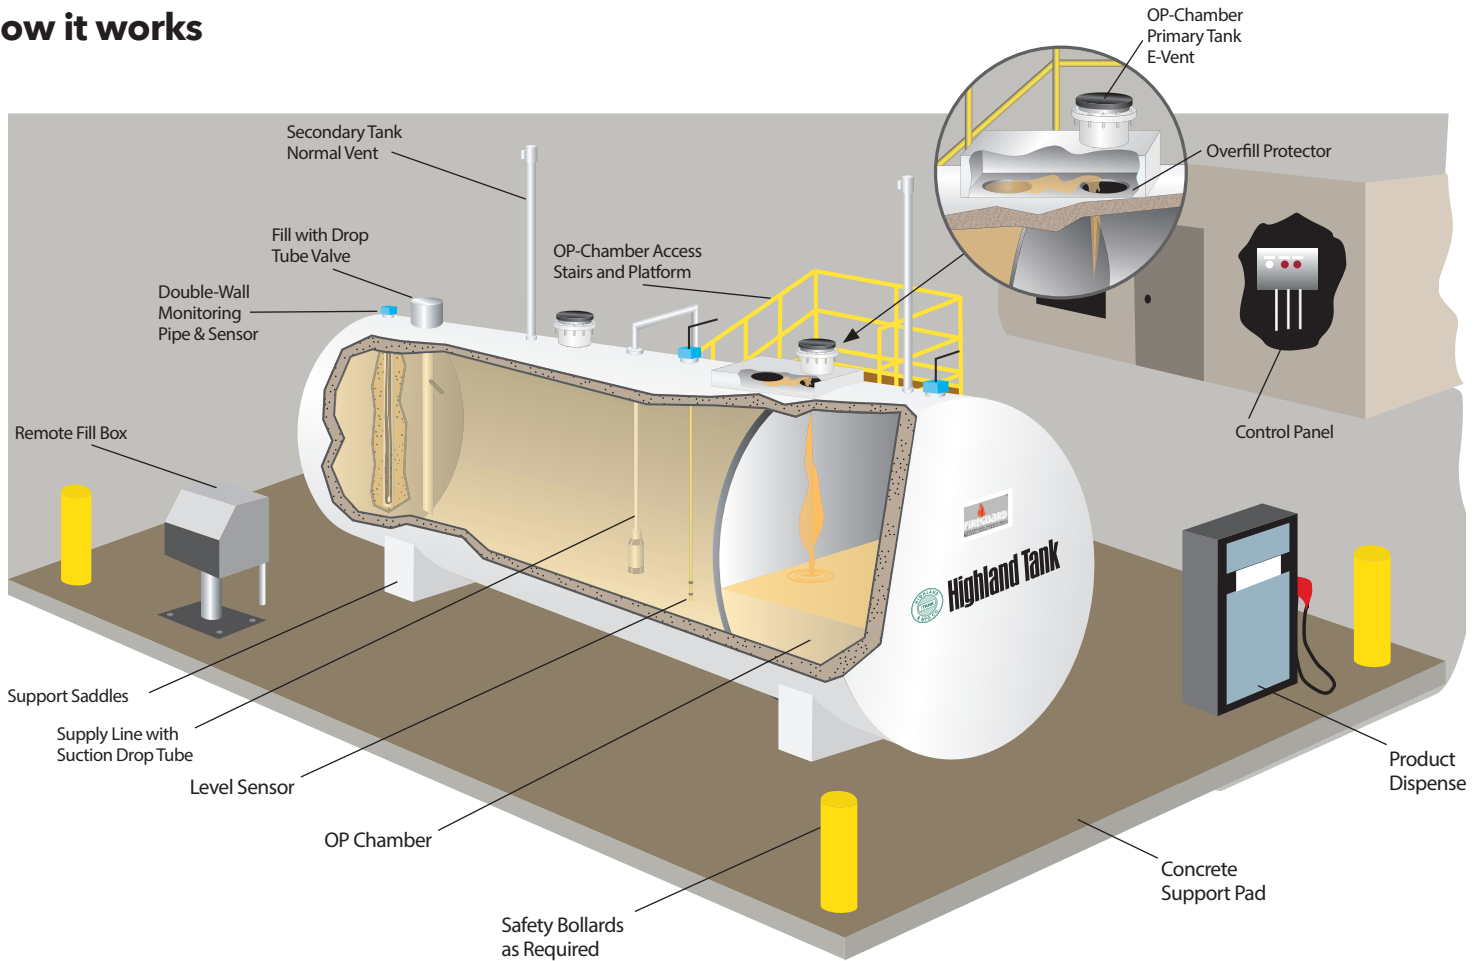

## OP Tank Options

The OP Tank is available as a UL-2085 Fireguard® tank or as a standard single or double-wall UL-142 horizontal tank. In addition to our standard features and options, we can also supply a larger (above 20%) containment chamber if greater spill containment is required.

Consult Highland Tank if a larger (above 20%) spill containment capability is required.

U.S. Patent No. 5,381,923



**Stoystown, PA**  
One Highland Road  
Stoystown, PA 15563-0338  
814.893.5701

**Manheim, PA**  
4535 Elizabethtown Road  
Manheim, PA 17545-9410  
717.664.0600

**Watervliet, NY**  
958 19th Street  
Watervliet, NY 12189-1752  
518.273.0801

**Greensboro, NC**  
2700 Patterson Street  
Greensboro, NC 27407-2317  
336.218.0801

**Friedens, PA**  
1510 Stoystown Road  
Friedens, PA 15541-7402  
814.443.6800

**Clarkston, MI**  
4701 White Lake Road  
Clarkston, MI 48346-2554  
248.625.8700

**Mancelona, MI**  
9517 Lake Street  
Mancelona, MI 49659-7968  
231.587.8412



**PROUDLY MADE IN AMERICA**  
© Highland Tank - HT-1009 - 01/2019