



storage tanks



vertical fireguard® tanks

HT-1163

PRODUCT DETAILS

Fireguard® tanks are thermally protected, double-wall steel aboveground tanks. Fireguard® is an alternative for the safe storage of motor fuels and other flammable and combustible liquids aboveground. They are used where a fire-protected tank is needed because of setback limitations or regulatory requirements. These tanks are UL labeled and meet or exceed the requirements of UL-2085 including:

- Two-Hour Full Scale Pool Fire Test
- Hose Stream Test
- Ballistics/Projectile Test
- Vehicle Impact Test
- Interstitial Communication Test

Blast effect analysis proved Fireguard® resists, with limited damage to the primary steel tank, the effects of a 50 lb man-portable explosive device, a 500 lb vehicle-born improvised explosive device, and a 10 psig vapor cloud explosion.

Fireguard® Features

Each tank is constructed with a minimum 3" interstice around the inner tank. The interstice is completely filled with a lightweight, monolithic material. This high efficiency insulation protects the inner tank in the unlikely event of a fire or extreme heat.

It is porous to allow fluid migration through the interstice to the monitoring point.

Unlike concrete encased tanks, Fireguard® tanks' steel outer wall protects the insulation, eliminating the problem of cracking and spalling concrete. Because of its unique construction, each tank is pressure-testable in the factory and at the job-site.

With Fireguard®, there is no question of compliance with fire codes; the tank is shipped with factory-installed emergency vents on both the primary and the secondary containment tanks for protection if exposed to fire or excessive pressure.



Fireguard® Advantages

- Carries UL-2085 listing as Insulated Secondary Containment for Flammable Liquids
- Lightweight – insulation 75% lighter than concrete – costing less to ship and install
- Reduces tank setback and separation distance requirements by up to 50%
- Fireguard's® secondary containment can be tightness-tested on-site
- Steel outer wall protects insulation
- Available in vertical, rectangular and cylindrical designs
- Wide range of tank capacities: 300-60,000 gallons
- Subject to strict, three-tier independent third-party quality assurance program
- STI® standard 30-year limited warranty

Pre-engineered Fireguard® design options

- Diesel or Biodiesel Blends
- Boiler or Emergency Diesel-Electric Generator Systems
- Gasoline or E85 Ethanol
- Aviation Refueling

Highland Tank offers a wide range of accessories and options to configure your tank for your specific application.

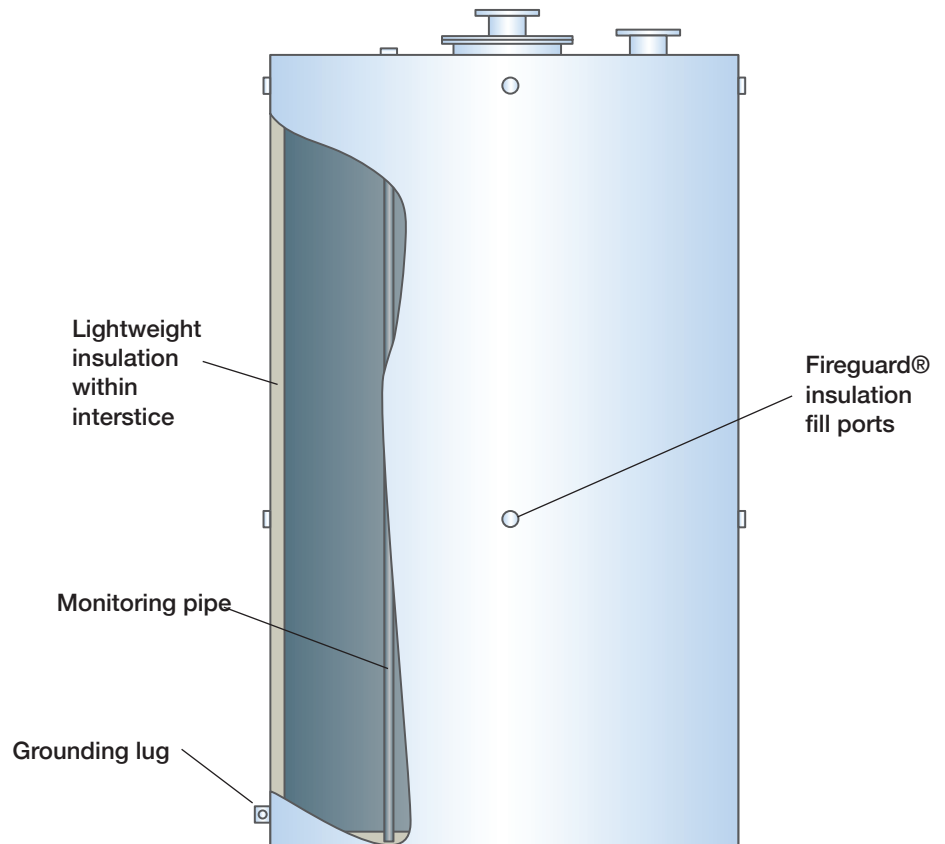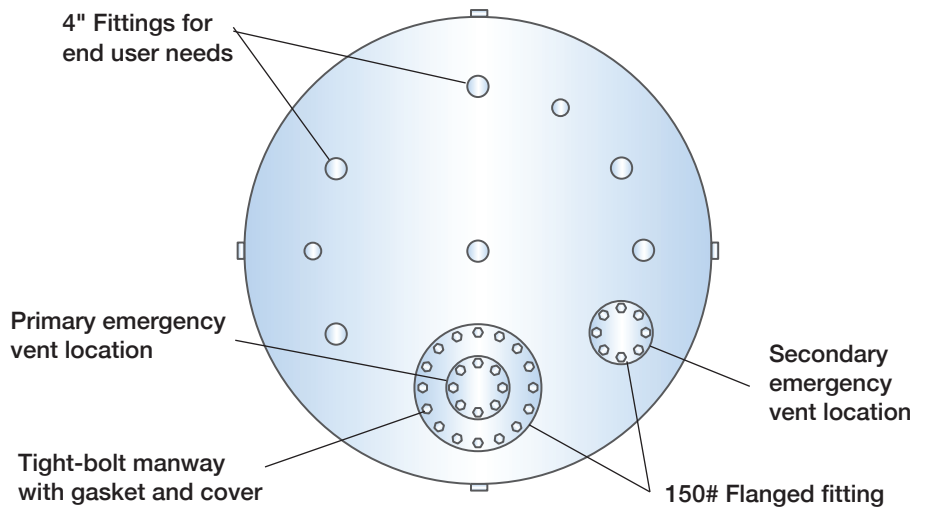

Highland Tank®

Stoystown, PA
One Highland Road
Stoystown, PA 15563-0338
814.893.5701

Manheim, PA
4535 Elizabethtown Road
Manheim, PA 17545-9410
717.664.0600

Watervliet, NY
958 19th Street
Watervliet, NY 12189-1752
518.273.0801

Greensboro, NC
2700 Patterson Street
Greensboro, NC 27407-2317
336.218.0801

Lebanon, PA
2225 Chestnut Street
Lebanon, PA 17042-2504
717.664.0602

Friedens, PA
1510 Stoystown Road
Friedens, PA 15541-7402
814.443.6800

Clarkston, MI
4701 White Lake Road
Clarkston, MI 48346-2554
248.625.8700

Mancelona, MI
9517 Lake Street
Mancelona, MI 49659-7968
231.587.8412



PROUDLY MADE IN AMERICA