



## FuelShield-Pedestal-PLUS - Fuel Inventory & Dispensing Systems

HT-6119

**High-LINK® Integrated Systems** couple superior steel tank products with state-of-the-art electronic management devices and SCI's proprietary software providing real-time data to optimize usage and transfer of **any liquid operation**.

### PRODUCT DETAILS

FuelShield-PLUS systems are the most advanced versions of our innovative wireless automated fuel management system. FuelShield-PLUS systems include LevelShield liquid inventory management capability to monitor fuel and water levels and liquids temperature.

Two systems are available:

- FuelShield-PLUS monitors liquids in up to 8 storage tanks
- FuelShield-MINI-PLUS monitors liquids in up to 4 storage tanks

Designed for stationary or mobile tank installations, it is suitable for both retail and commercial applications.

FuelShield-PLUS systems can be used in retrofit applications on existing pumping systems or designed into new facilities using digital pumps.

The additional hardware required for probe data receiving is housed in the FuelShield. A single FuelShield-PLUS unit can process data from up to 8 separate level probes and control dispensing at 8 independent locations.

Features:

- Track every fuel transaction by vehicle, driver, fuel type, amount, cost, date, and time
- Manage fuel transportation, receipt, dispensing, and consumption
- Easy-to-use cloud-based platform
- Secure and convenient multi-user web dashboard platform
- Full visibility of your entire operation from anywhere, anytime, on any device

Benefits:

- Eliminate fraud and human errors
- Authorize vehicles, equipment and operator fuel dispensing
- Cost-saving minimal installation
- Optimize fuel consumption
- Reporting, analytics, alerts and more with High-LINK software platform

## FuelShield-Pedestal



High-LINK® Integrated Systems operate on a web-based platform providing critical data via any mobile device.

Each High-LINK® Integrated System is customized to site-specific conditions and requirements. Our management tools are user-friendly and can be managed remotely.

High-LINK®'s analytics improve business decision making process improving efficiency, reducing operating costs and system optimization.

High-LINK® Integrated Systems have been engineered to work seamlessly with all of our storage tanks and process vessels with each system being tailored to your needs.

### Specifications

#### Physical

- Cabinet Size 15.25" W x 9.0" D x 64.0" H
  - Base Plate Footprint: 16.5" W x 10.0" D
  - Foundation Connection:
- Operating Voltages:
  - 12/24 VDC or 110-230 VAC
- Operating Temperature Range:
  - -32° to 135° F without heater
  - -55° to 135°F with optional heater
- Control Panel Standard Features
  - Keypad
  - Dallas Key Reader
  - Digital Display: size, features?
- Access Panel (Locking, Rear):
  - 13.625" W x 35.0" HD
- System Bypass Key

#### Pump Controls

- Relay Contact Rating: 15 AMPS
- Pulsar Type: Contact closure- dry contact
- Pulsar Input: 2-wire
- Pulsar Speed: 1000HZ

#### Construction:

- Welded aluminum
- Powder coated
- Sloped top to shed water/snow
- Neoprene access panel seal

#### Options

- Emergency Stop
- Cabinet Heater

#### Controls

- Up to eight (8) hoses
- Up to eight (8) level probes
- Unlimited drivers and vehicles

#### User ID Options

- Dallas Key
- Magnetic Card
- HID
- PIN Pad

#### Vehicle ID Options


- Dallas Key
- Magnetic Card
- HID
- PIN
- RFID
- Bar-code Scanner

#### Communication Options

- Satellite
- GPRS
- Wi-Fi
- LAN

The FuelShield module provides over 50 standard reports and multiple data filtering functions to provide users with big data analysis capabilities. User-defined custom reports are also available for tailored reporting.


The FuelShield-LITE model is also available for limited service monitoring 1 or 2 hoses.

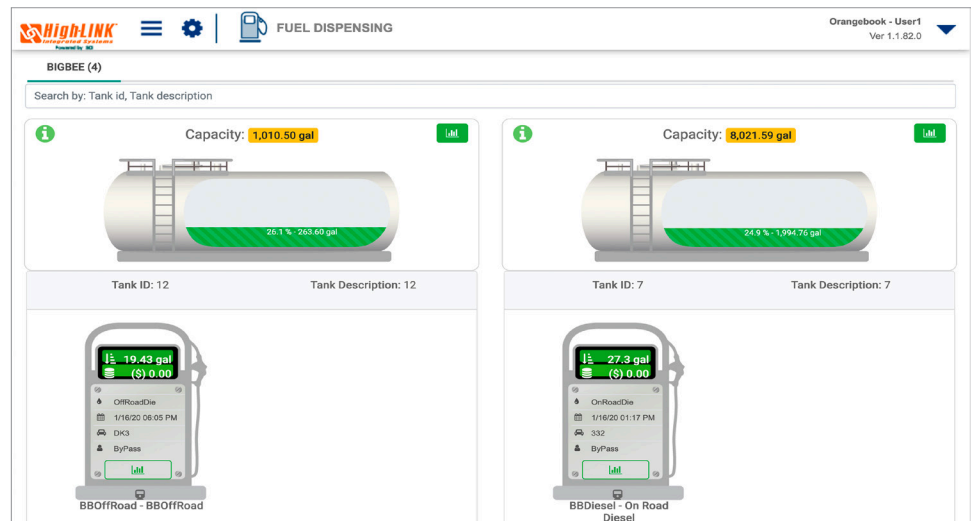

## LevelShield

FuelShield-PLUS and MINI-PLUS arrive configured to handle input from up to 8 or 4 optional Magnetostrictive probes that can be installed in separate tanks.

### Magnetostrictive Probe

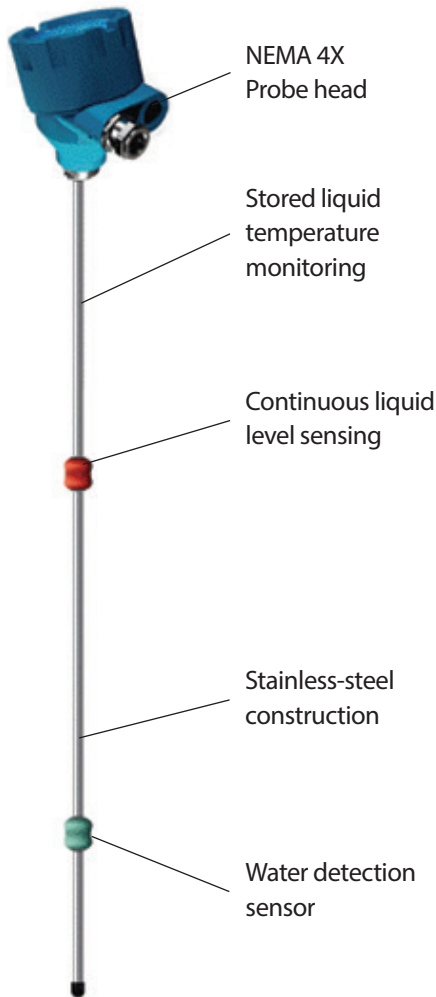

### LevelShield Specifications

- 2-Float device
  - Continuous product level monitoring along entire length of probe
  - Water level in bottom of tank
- Integrated sensor for temperature-compensated volume monitoring
- Accuracy up to  $\pm 0.02\%$
- Resolution  $\pm .004\%$
- Operating temperature:  $-40^\circ$  to  $185^\circ\text{F}$
- RS-485 wired communication
- Sized to fit Highland Tank's standard tanks up to 14' diameter with longer lengths available upon request

### Physical

- Floats: SP-P for product, SP-A for water
- Stem: 316L stainless steel tubing
- Tank connection: 2" NPT

### Certifications

- Explosion-proof ATEX CESI & IENRIS-OIML R85 (pending)
- Class 1 Division 1&2 (Safer Barrier)
- Class 1 Zone 1&2 (Safer Barrier)

### LevelShield Specifications

- Plug-and-play design
- Liquids or solids measurement capabilities
- Compatible with any size tank and scalable for any size operation
- Customization options for a variety of applications and functions to meet any budget
- Can be used in hazardous locations
- Wide variety of level measurement technologies
- Remote displays and alarms available
- Retrofit or new construction
- Indoor and outdoor mounting
- Knowledgeable startup team and support
- No-cost site visits for estimates



**Stoystown, PA**  
One Highland Road  
Stoystown, PA 15563-0338  
**814.893.5701**

**Manheim, PA**  
4535 Elizabethtown Road  
Manheim, PA 17545-9410  
**717.664.0600**

**Watervliet, NY**  
958 19th Street  
Watervliet, NY 12189-1752  
**518.273.0801**

**Greensboro, NC**  
2700 Patterson Street  
Greensboro, NC 27407-2317  
**336.218.0801**

**Lebanon, PA**  
2225 Chestnut Street  
Lebanon, PA 17042-2504  
**717.664.0602**

**Friedens, PA**  
1510 Stoystown Road  
Friedens, PA 15541-7402  
**814.443.6800**

**Clarkston, MI**  
4701 White Lake Road  
Clarkston, MI 48346-2554  
**248.625.8700**

**Mancelona, MI**  
9517 Lake Street  
Mancelona, MI 49659-7968  
**231.587.8412**



**PROUDLY MADE IN AMERICA**  
© Highland Tank - HT-6119 - 10/2020