

Built on Tradition



Highland Tank®



FuelShield-MINI-PLUS

HT-6125

Fuel Inventory & Dispensing systems

FuelShield-PLUS systems are the most advanced versions of our innovative wireless automated fuel management system. FuelShield-PLUS systems include LevelShield liquid inventory management capability to monitor fuel and water levels and liquids temperature.

Two systems are available:

- FuelShield-PLUS monitors liquids in up to 8 storage tanks
- FuelShield-MINI-PLUS monitors liquids in up to 4 storage tanks

Designed for stationary or mobile tank installations, it is suitable for both retail and commercial applications.

FuelShield-PLUS systems can be used in retrofit applications on existing pumping systems or designed into new facilities using digital pumps. The additional hardware required for probe data receiving is housed in the FuelShield.

A single FuelShield-MINI-PLUS unit can process data from up to 4 separate level probes and control dispensing at 4 independent locations.

Features:

- Track every fuel transaction by vehicle, driver, fuel type, amount, cost, date, and time
- Manage fuel transportation, receipt, dispensing, and consumption
- Easy-to-use cloud-based platform
- Secure and convenient multi-user web dashboard platform
- Full visibility of your entire operation from anywhere, anytime, on any device

Benefits:

- Eliminate fraud and human errors
- Authorize vehicles, equipment and operator fuel dispensing
- Cost-saving minimal installation
- Optimize fuel consumption
- Reporting, analytics, alerts and more with High-LINK software platform

System Details



FuelShield Mini Specifications

Physical

- Cabinet Size: 14.0" W x 8.0" D x 16.0" H
- Wall or supports mount

Operating Voltages:

- 12/24 VDC or 110-230 VAC

Operating Temperature Range:

- Minus 32° to 135° F without heater
- Minus 55° to 135°F with optional heater

Control Panel Standard Features

- Keypad
- Dallas Key Reader
- Digital Display: 2-row, 16 block backlit

Pump Controls

- Relay Contact Rating: 15 AMPS
- Pulsar Type: Contact closure- dry contact
- Pulsar Input: 2-wire
- Pulsar Speed: 1000HZ

Construction:

- Welded steel
- Powder coated
- Rubber gasket access panel seal



Options

- Emergency Stop
- Cabinet Heater
- Remote Access Cabinet

Controls

- Up to eight (4) hoses
- Up to eight (4) level probes
- Unlimited drivers and vehicles

User ID Options

- Dallas Key
- Magnetic Card
- HID
- PIN Pad

Vehicle ID Options

- Dallas Key
- Magnetic Card
- HID
- PIN
- RFID
- Barcode Scanner

Communication Options

- Satellite
- GPRS
- Wi-Fi

The FuelShield software module provides over 50 standard reports and multiple data filtering functions to provide users with big data analysis capabilities. User-defined custom reports are also available for tailored reporting.


Other FuelShield models are available for specific applications, limited service and added capability.

- FuelShield-LITE - 1-2 hoses, with limited options



Highland Tank®

Magnetostrictive Probe

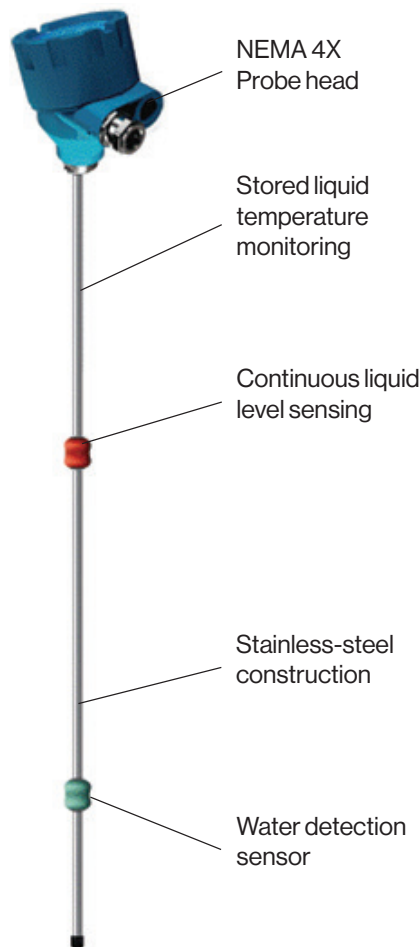

LevelShield Benefits

- Plug-and-play design
- Liquids or solids measurement capabilities
- Compatible with any size tank and scalable for any size operation
- Customization options for a variety of applications and functions to meet any budget
- Can be used in hazardous locations
- Wide variety of level measurement technologies
- Remote displays and alarms available
- Retrofit or new construction
- Indoor and outdoor mounting
- Knowledgeable startup team and support
- No-cost site visits for estimates

High-LINK® Integrated Systems operate on web-based Microsoft operating system computer platforms providing critical data via any mobile device.

Each High-LINK® Integrated System is customized for site-specific conditions and requirements. Our management tools are user-friendly and can be managed remotely.

Utilizing big data analytics improves the business decision making process, elevating efficiency, reducing operating costs and system optimization.

High-LINK® Integrated Systems have been engineered to work seamlessly with all of our storage tanks and process vessels with each system being tailored to your needs.

Level Shield Specifications

- 2-Float device
 - Continuous product level monitoring along entire length of probe
 - Water level in bottom of tank
- Measuring accuracy up to ± 0.02 "
- Integrated sensor for temperature-compensated volume monitoring
- RS-485 wired communication standard
- Standard lengths of 60" to 167" (Longer probe lengths are available upon request)
- Resolution $\pm .004$ "
- Operating temperature: minus 40° to 185°F

Physical

- Floats: SP-P for product, SP-A for water
- Stem: 316L stainless steel tubing
- Tank connection: 2" NPT

Certifications

- Explosion-proof ATEX CESA & IENRIS-OIML R85 (pending)
- Class 1 Division 1&2 (Safer Barrier)
- Class 1 Zone 1&2 (Safer Barrier)

Specifications for magnetostrictive probes only.
Other level-sensing equipment is available upon request.

FuelShield-PLUS and MINI-PLUS arrive configured to handle input from up to 8 or 4 optional Magnetostrictive probes that can be installed in separate tanks.



Highland Tank®



Stoystown, PA
One Highland Rd.
Stoystown, PA 15563
(814) 893-5701

Manheim, PA
4535 Elizabethtown Rd.
Manheim, PA 17545
(717) 664-0600

Watervliet, NY
958 19th St.
Watervliet, NY 12189
(518) 273-0801

Greensboro, NC
2700 Patterson St.
Greensboro, NC 27407
(336) 218-0801

Friedens, PA
1510 Stoystown Rd.
Friedens, PA 15541
(814) 443-6800

Clarkston, MI
4701 White Lake Rd.
Clarkston, MI 48346
(248) 625-8700

Mancelona, MI
9517 Lake St.
Mancelona, MI 49659
(231) 587-8412