



grease interceptors

flush-with-floor automatic grease interceptor

HT-2821

PRODUCT DETAILS

The Flush-With-Floor GreaseStopper® is recessed with its top flush with the floor in order to intercept kitchen fixtures and floor drains, save valuable above floor space and accommodate existing piping and structural conditions.

This specialized grease removal device features an integral Automatic Grease

Interceptor with separate grease storage and dry electrical compartments. No other manufacturer offers anything even similar to the Flush-With-Floor (FWF) GreaseStopper®.


Ideal for On-Slab Installations

The grease interceptor is equipped with a hinged access cover that opens to reveal the entirety of the unit for easy cleaning and maintenance.

Additionally, internal water-tight covers with quick-release, flush-mounted latches prevent wash water from intruding into the compartments.

The covers are constructed of lightweight aluminum deck plate rated for foot traffic and are provided with an anti-slip finish for safety wherever it is installed.

Eliminates Vault
Requirements;
Designed for
Dependability

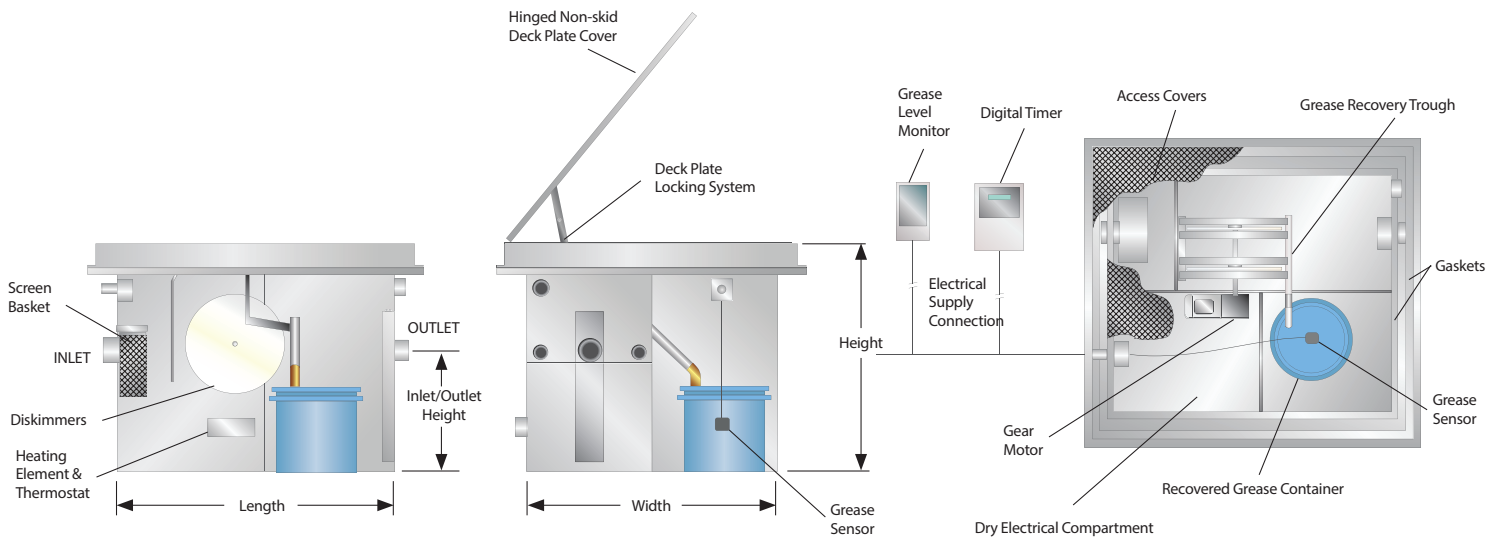

Standard Features

- » Constructed of 304 stainless steel for maximum strength and durability
- » Hinged non-skid deck plate cover for ease of maintenance
- » Extra-heavy leak-proof gaskets
- » Locking system to secure the cover to prevent accidental lid closure
- » Automatic grease removal system featuring electrically-powered grease diskimmers
- » Dry electric compartment with internal lid to protect the electronics and power connections
- » Grease storage compartment with removable container with high-level alarm
- » Integral perimeter channel to allow floor wash-down to drain into the grease interceptor
- » Integrated flow control device
- » Removable solids strainer basket

Options

- » Integral grease pump
- » Grade to invert extensions
- » H-20 grade level covers

All plumbing codes state that a "grease interceptor or automatic grease removal device shall be required to receive the drainage from fixtures and equipment including pot sinks, pre-rinse sinks, soup kettles or similar devices, wok stations, floor drains or sinks into which kettles are drained, automatic hood wash units and dishwashers without pre-rinse sinks."

Model FlowRate Gal/Min	Length	Dimensions Width	Height	Inlet & Outlet Diameter	Inlet & Outlet Height
FWF - AGI - 20	36"	36"	32"	2"	15"
FWF - AGI - 25	36"	36"	32"	3"	15"
FWF - AGI - 30	36"	36"	32"	3"	15"
FWF - AGI - 35	36"	36"	32"	3"	15"
FWF - AGI - 50	40"	36"	36"	4"	18"
FWF - AGI - 75	48"	36"	40"	4"	22"
FWF - AGI - 100	60"	38"	47"	4"	22"

National plumbing codes require a minimum 2 lbs. of grease retention for each gal/min of flow. Grease holding capacity at breakdown is determined by a minimum 90% efficiency rating in real life applications and installed according to specification.



Stoystown, PA
One Highland Road
Stoystown, PA 15563-0338
814.893.5701

Manheim, PA
4535 Elizabethtown Road
Manheim, PA 17545-9410
717.664.0600

Watervliet, NY
958 19th Street
Watervliet, NY 12189-1752
518.273.0801

Greensboro, NC
2700 Patterson Street
Greensboro, NC 27407-2317
336.218.0801

Friedens, PA
1510 Stoystown Road
Friedens, PA 15541-7402
814.443.6800

Clarkston, MI
4701 White Lake Road
Clarkston, MI 48346-2554
248.625.8700

Mancelona, MI
9517 Lake Street
Mancelona, MI 49659-7968
231.587.8412



PROUDLY MADE IN AMERICA

© Highland Tank - HT-2821 - 01/2019