### **Built on Tradition**





# **Deep Sump Basin**

HT-2034

The Deep Sump Basin (DSB) is a complete packaged system consisting of the DSB with Integral Grit and Pump Lift Chambers, Influent Pump Package, and Model R-HTC Rectangular Aboveground Oil/Water Separator.

The system is designed to remove free-floating oil, grease and settleable oily-coated solids from a vehicle maintenance facility's fuel area, wash area and service bay drains. They are installed in vehicle repair and service facilities, car and truck dealerships and fast lube shops to help prevent discharges of harmful pollutants into the storm or sanitary sewer system.


Highland Tank's standard DSB Systems feature flow rates from 25 to 200 gal./min. Custom systems with higher flow rates are also available. Pneumatic sensor and influent pump systems are standard, with electronic systems available.

#### **Features**

- · Automatic for ease of operation
- Utilizes patented Corella® coalescer technology
- Rugged all-steel design & construction
- Easy installation with limited excavation
- Removable vapor-tight top covers for service and maintenance

#### **Turnkey Treatment Systems**

## **Drawing & Details**

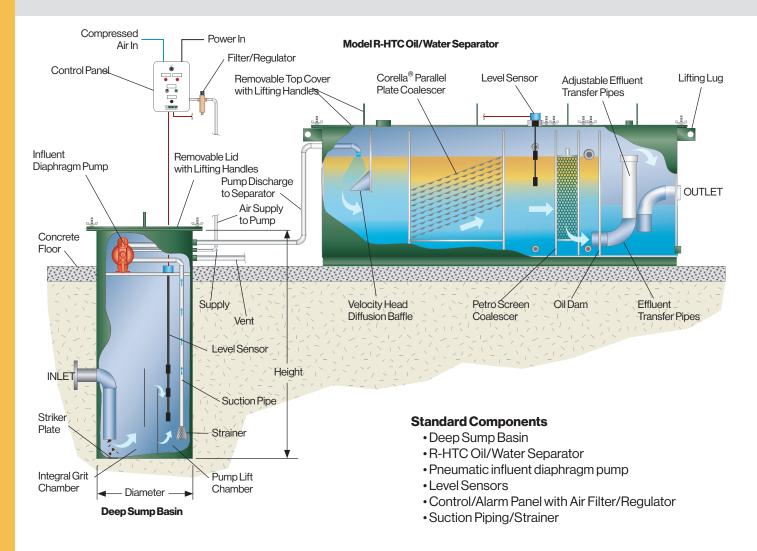

Model DSB	Flow Rate Gal/Min	Recommended Oil Pump-out Gallons	Nominal Separator Dimensions Length Width Height	Inlet & Outlet Diameter	Nominal Sump Dimensions Diameter x Height
300	25	60	7'-4" x 2'-4" x 3'-0"	1"/3	2'-6" x 6'-0"
600	50	120	9'-4" x 3'-4" x 3'-0"	1.25" / 4"	2'-6" x 6'-0"
900	75	180	10'-0" x 3'-0" x 4'-0"	2"/6"	4'-0" x 8'-0"
1,000	100	200	11'-0" x 4'-0" x 4'-0"	2"/6"	4'-0" x 8'-0"
2,000	200	400	12'-0" x 5'-0" x 5'-0"	4" / 8"	4'-0" x 8'-0"
2,000	200	400	12'-0" x 5'-0" x 5'-0"	4" / 8"	5'-4" x 9'-0"



