



oil/water separation

elevator sump pump interceptor

HT-2555

PRODUCT DETAILS

Hydraulic oil in an elevator sump is a code violation and a danger for all personnel working on and around the elevator equipment. This condition also causes damage to the elevator equipment and is a potential contaminant if drained or pumped into the environment. Hydraulic oil will also penetrate concrete, seeping into the ground, requiring an environmental cleanup and removal of all contaminated soils.

Highland Tank Elevator Sump Pump Interceptors (ESP-INT) are designed to trap sediment and retain free floating oil and grease (petroleum hydrocarbons and other volatile liquids) in wastewater discharged from elevator pit sumps.

ESP-INTs prevent the discharge of sediment, oil, grease and other substances harmful or hazardous to the

building's drainage system, the public sewer, sewage treatment plant or other treatment processes.

Elevator Sump Pump Interceptors are constructed of mild carbon steel and coated with heavy duty polyurethane for superior corrosion resistance.

Stainless steel construction is also available. ESP-INTs are suitable for installation above or below grade, and are available in configurations to fit almost any requirement..


Our design goes beyond baffle and coalescer plate-style interceptor's performance rating for separation of free floating oils and gravity waste stream flow and addresses oils that become emulsified in a pumped waste stream flow.

Removes petroleum hydrocarbons from elevator sump discharges and meets new ASME A17.1 standards for elevator safety


Options

- » Side oil storage compartment
- » Sump pumps
- » Control panels
- » Interceptor controls
- » Double-wall construction
- » Leak detection systems
- » Flush with floor design

Typical Above-Floor Installation

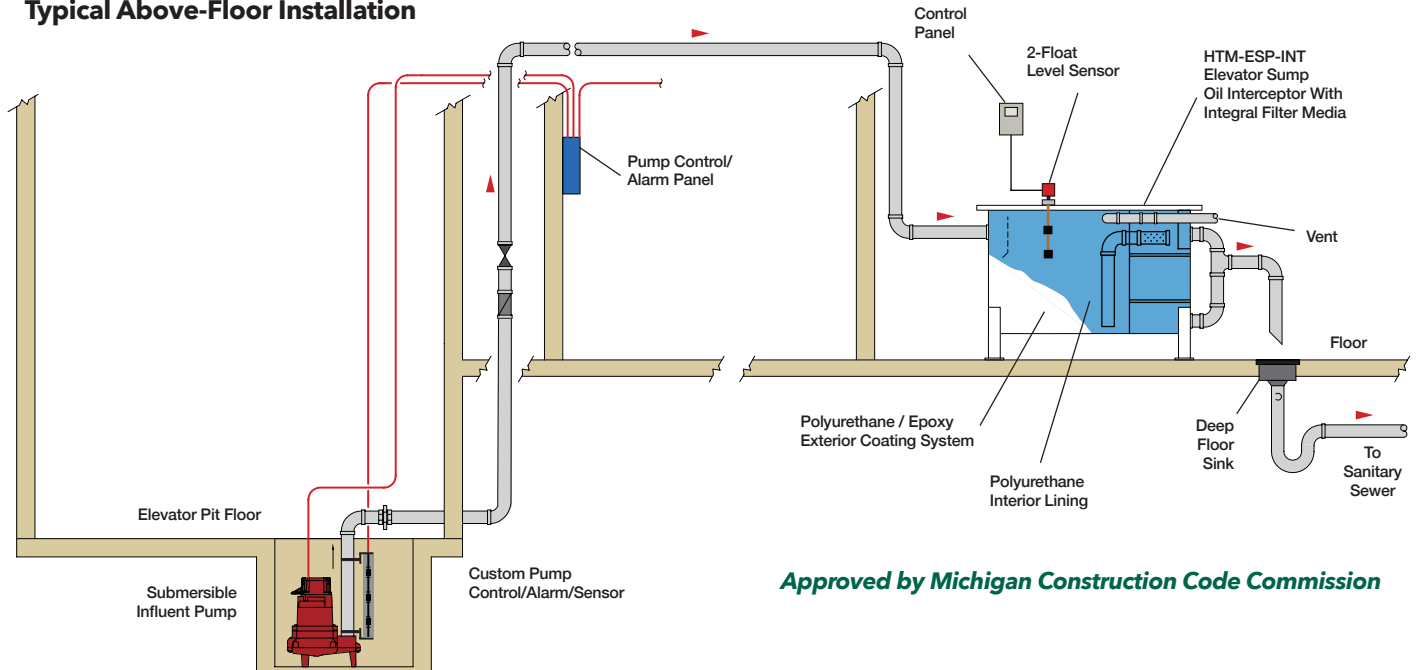

Approved by Michigan Construction Code Commission

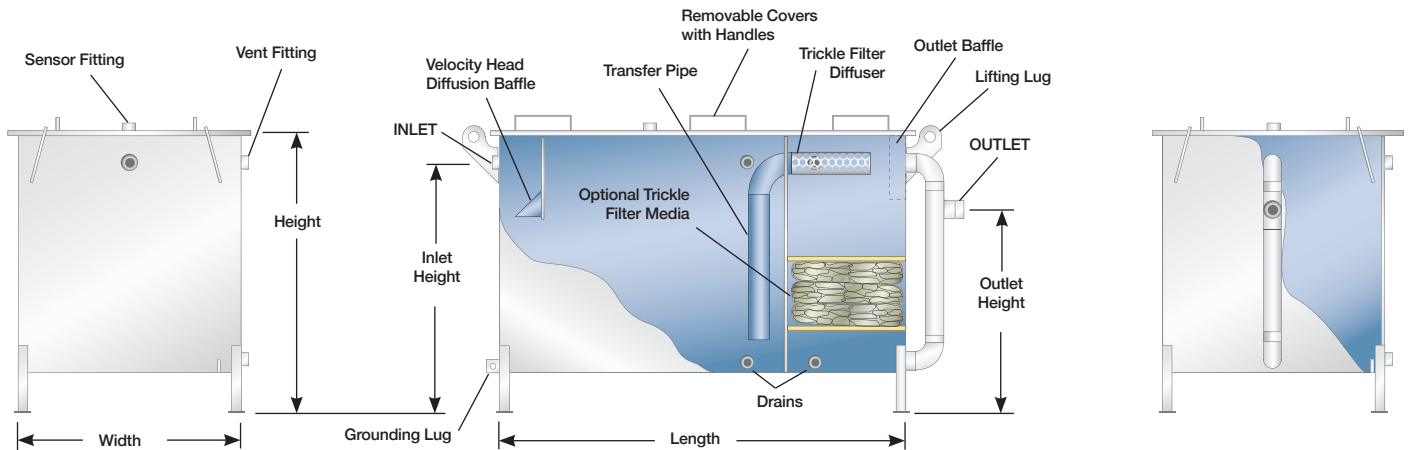

Aboveground model shown, flush-with-Floor models available. Contact Highland Tank.

Model	*Flow Rate Gal/Min	Total Volume Gallons	Ft ³	Dimensions			Inlet/Outlet Diameter MPT	Centerline Inlet/Outlet Height	Oil Storage Capacity Gallons
ESP INT				Length	Width	Height			
50	50	30	741	62"	34"	48"	2"/4"	44"/34"	45
100	100	572	76.5	82"	42"	48"	3"/4"	44"/34"	53
150	150	897	120	94"	48"	54"	3"/6"	50"/37"	60
200	200	1157	154.7	114"	48"	60"	4"/6"	55"/37"	68

* Intermittent flow. **Note:** Vent Connections are 2" or 3" NPT on outlet end of MOI. Check and advise for local code requirements.



Highland Tank®

Stoystown, PA
One Highland Road
Stoystown, PA 15563-0338
814.893.5701

Manheim, PA
4535 Elizabethtown Road
Manheim, PA 17545-9410
717.664.0600

Watervliet, NY
958 19th Street
Watervliet, NY 12189-1752
518.273.0801

Greensboro, NC
2700 Patterson Street
Greensboro, NC 27407-2317
336.218.0801

Lebanon, PA
2225 Chestnut Street
Lebanon, PA 17042-2504
717.664.0602

Friedens, PA
1510 Stoystown Road
Friedens, PA 15541-7402
814.443.6800

Clarkston, MI
4701 White Lake Road
Clarkston, MI 48346-2554
248.625.8700

Mancelona, MI
9517 Lake Street
Mancelona, MI 49659-7968
248.625.8700



PROUDLY MADE IN AMERICA