## **Built on Tradition**





# **Elevator Sump Pump Interceptor**

### HT-2555

Hydraulic oil in an elevator sump is a code violation and a danger for all personnel working on and around the elevator equipment. This condition also causes damage to the elevator equipment and is a potential contaminant if drained or pumped into the environment. Hydraulic oil will also penetrate concrete, seeping into the ground, requiring an environmental cleanup and removal of all contaminated soils.

Highland Tank Elevator Sump Pump Interceptors (ESP-INT) are designed to trap sediment and retain free floating oil and grease (petroleum hydrocarbons and other volatile liquids) in wastewater discharged from elevator pit sumps.


ESP-INTs prevent the discharge of sediment, oil, grease and other substances harmful or hazardous to the building's drainage system, the public sewer, sewage treatment plant or other treatment processes. Elevator Sump Pump Interceptors are constructed of mild carbon steel and coated with heavy duty polyurethane for superior corrosion resistance. Stainless steel construction is also available. ESP-INTs are suitable for installation above or below grade, and are available in configurations to fit almost any requirement.

Our design goes beyond baffle and coalescer plate-style interceptor's performance rating for separation of free floating oils and gravity waste stream flow and addresses oils that become emulsified in a pumped waste stream flow.

#### Options

- Side oil storage compartment
- Sump pumps
- Control panels
- Interceptor controls
- Double-wall construction
- Leak detection systems
- Flush with floor design

## Installation & Construction Details

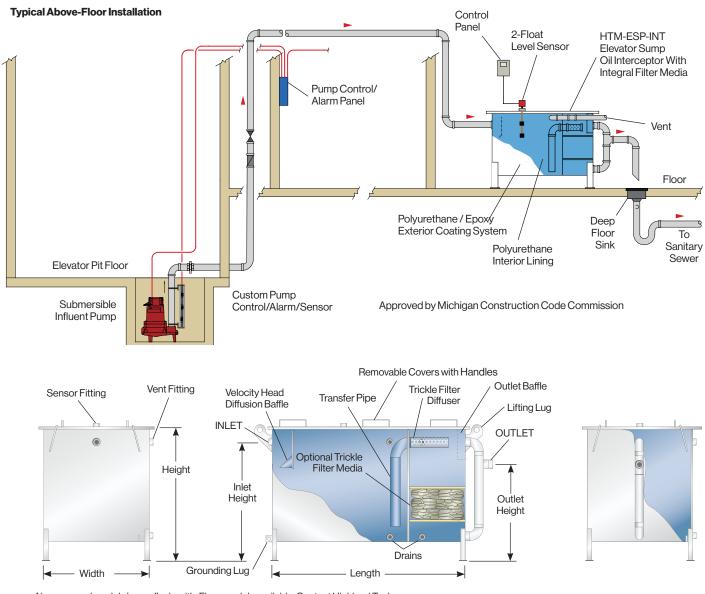

Aboveground model shown, flush-with-Floor models available. Contact Highland Tank.

Model	*Flow Rate	Total Volume		Nominal Dimensions			Inlet/Outlet	Centerline Inlet/Outlet	Oil Storage Capacity
ESPINT	Gal/Min	Gallons	Ft <sup>3</sup>	Length	Width	Height	Diameter MPT	Height	Gallons
50	50	30	741	62"	34"	48"	2"/4"	44"/34"	45
100	100	572	76.5	82"	42"	48"	3"/4"	44"/34"	53
150	150	897	120	94"	48"	54"	3"/6"	50"/37"	60
200	200	1157	154.7	114"	48"	60"	4"/6"	55"/37"	68

\* Intermittent flow. Note: Vent Connections are 2" or 3" NPT on outlet end of MOI. Check and advise for local code requirements.



**Stoystown, PA** One Highland Rd. Stoystown, PA 15563 (814) 893-5701

Manheim, PA 4535 Elizabethtown Rd. 3 Manheim, PA 17545 (717) 664-0600 Watervliet, NY

958 19th St. Watervliet, NY 12189 (518) 273-0801

**Greensboro, NC** 2700 Patterson St. Greensboro, NC 27407 (336) 218-0801 **Friedens, PA** 1510 Stoystown Rd. Friedens, PA 15541 (814) 443-6800 **Clarkston, MI** 4701 White Lake Rd. Clarkston, MI 48346 (248) 625-8700 Mancelona, MI 9517 Lake St. Mancelona, MI 49659 (231) 587-8412

MADE IN

U. S. A