

# Catwalk Lube Tanks



## Catwalk Lube Tanks


Highland's Catwalk Tanks are designed for the fast lube industry. Rectangular construction and carefully engineered sizes assure the most dependable and economical solution to your lubrication oil storage needs. Spilled oil stays on top of the tank, but under the steel or fiberglass grating, preventing dangerous footing conditions and minimizing "house keeping" considerations.

Note: The National Fire Protection Association (NFPA) Code 30A specifies UL142 listed tanks by reference to Code 30, Section 2-2.3.1(a) as appropriate for the storage of lubrication oils. Please request Highland "NFPA Lubrication Oil Guidance" document for more details.

## Features

- **Innovative Design** Top Extended Sidewall Toe Kick directs spilled oil to a sloped end of the tank, providing for quick and easy cleanup.
- **Superior Steel Welded Construction** Highland engineered these tanks to endure the rigors of the fast lube service industry, meeting and surpassing rigid UL-142 design criteria.
- **Integral Structural Supports** Supports welded to the underside of each tank minimize corrosion concerns and allow for easy visual inspection.
- **Welded Fittings** Heavy duty forged fittings for fill, vent, gauge, emergency vent and pump connections are welded into each tank.
- **Strategically Located Collapsible Lifting Lugs** Integral lifting lugs are located to facilitate unloading and placement of the tank, but not hinder its use.
- **Red Primer Paint** Primary coating provides economical yet effective surface condition protection.
- **Available in Double-wall** Sides and bottom have a secondary steel wall. Tank is provided with an interstitial vent opening.
- **Optional Accessories** Handrails and Shelves.

## General Arrangement

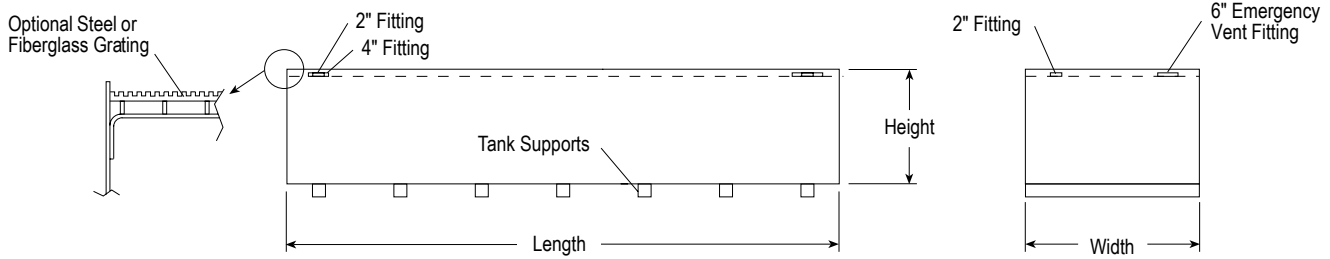

Model	Nominal Capacity (Gallons)	Nominal Dimensions*			Tank Thickness (Gauge)
		Length	Width	Depth	
<b>Single-wall</b>					
CT-740	750	15'8"	3'2"	2'0"	10 ga
CT-987	1,000	18'0"	2'9"	2'8"	10 ga
<b>Double-wall</b>					
DC-740	750	15'9"	3'3"	2'0.5"	10 ga
DC-987	1,000	18'1"	2'9"	2'8.5"	10 ga

Note: Add 2" (height of tank supports) to depth to determine overall height. All double-wall lube tanks include a secondary emergency vent fitting and a 1/2" button sight glass in the outer tank for interstitial monitoring.

## Recommended Guideline Specifications

Furnish and install a \_\_\_\_\_ gallon UL-142 Type \_\_\_\_\_, single-wall/double-wall rectangular Catwalk Tank, \_\_\_\_\_ long x \_\_\_\_\_ wide x \_\_\_\_\_ deep. Tank shall conform to and be labeled in accordance with Underwriters Laboratories Standard UL-142.

Tanks shall be of all welded construction, fabricated of 10 ga. mild carbon steel. Standard construction shall utilize lap joints with continuous fillet weld on all outside seams. Tank shall include five 2" forged steel fittings and one 4" or 6" forged steel emergency vent fitting for each tank wall. Fabrication shall include 2" high supports welded to the tank underside, providing ground clearance for visual inspection, a 2" high lip around top and steel/FRP grating to cover tank top.

Also provide integral handrail system with two/four shelves and one/two sets of steps.

Tank shall be fabricated by Highland Tank.

Tank shall be coated with red primer.

Highland tanks are air tested at the factory but **MUST** be retested at the jobsite by the installer prior to installation.

## Warranty

The subject tank is warranted by Highland Tank & Mfg. Co. to be free from defects in manufacturing, workmanship and materials. Highland Tank will repair or replace, at its sole discretion F.O.B. factory, within a period of one year after date of shipment, any item of our manufacture. All other items shall be warranted by their respective manufacturers.

Liability hereunder is limited, as stated above, and does not include labor, installation costs, indirect or consequential damages of any kind. Tanks must be returned to the factory and if found to be defective upon examination, will be repaired, replaced or credit will be issued at our option.



Please visit us at [www.highlandtank.com](http://www.highlandtank.com)

One Highland Road  
Stoystown, PA 15563  
814-893-5701  
FAX 893-6126

4535 Elizabethtown Road  
Manheim, PA 17545  
717-664-0600  
FAX 664-0617

958 19th Street  
Watervliet, NY 12189  
518-273-0801  
FAX 273-1365

2700 Patterson Street  
Greensboro, NC 27407  
336-218-0801  
FAX 218-1292

2225 Chestnut Street  
Lebanon, PA 17042  
717-664-0602  
FAX 664-0631

1510 Stoystown Road  
Friedens, PA 15541  
814-443-6800  
FAX 444-8662